
FED. SUP CLASS
4810

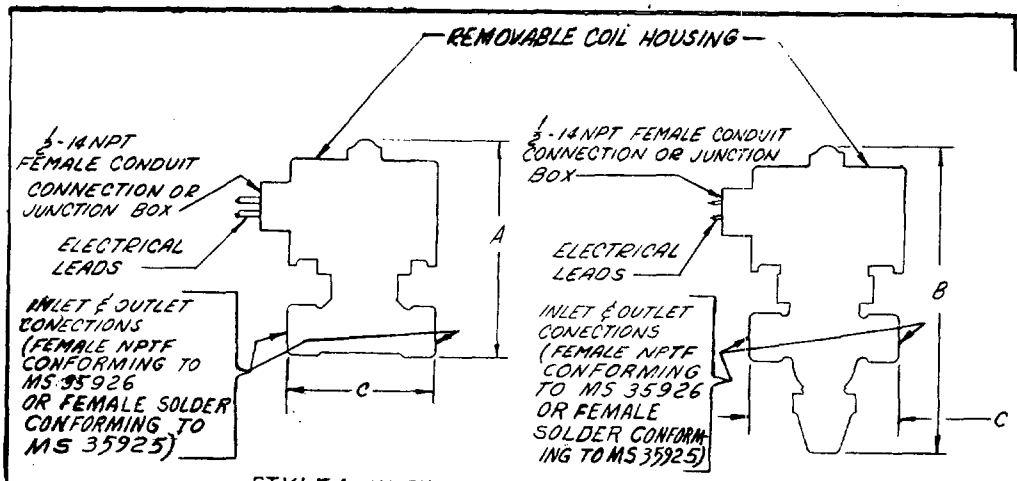


STYLE 1 - WITHOUT MANUAL OPENING STEM

STYLE 2 - WITH MANUAL OPENING STEM

| DASH NO. | TYPE | STYLE | MAX DIMENSIONS (IN.) A | B | C | SIZE | CAP. RATING | ELEC. RATING | CONNECTION SIZE PIPE | TUBING |
|---|---|---|---|---|---|---|---|---|---|---|
| -1 | I | 1 or 2 | 6-1/4 | 8-1/4 | 3-1/4 | 1 | 3 TR | 120/50-60 Hz | 3/8 IN. | 1/2 IN. |
| -2 | I | 1 or 2 | 6-1/4 | 8-1/4 | 3-1/4 | 1 | 3 TR | 208-240/50-60 Hz | 3/8 IN. | 1/2 IN. |
| -3 | I | 1 or 2 | 6-1/4 | 8-1/4 | 3-1/4 | 1 | 3 TR | 12 V DC | 3/8 IN. | 1/2 IN. |
| -4 | I | 1 or 2 | 6-1/4 | 8-1/4 | 3-1/4 | 1 | 3 TR | 24 V DC | 3/8 IN. | 1/2 IN. |
| -5 | I | 2 | — | 8-1/2 | 3-3/8 | 2 | 7.5 TR | 120/50-60 Hz | 1/2 IN. | 5/8 IN. |
| -6 | I | 2 | — | 8-1/2 | 3-3/8 | 2 | 7.5 TR | 208-240/50-60 Hz | 1/2 IN. | 5/8 IN. |
| -7 | I | 2 | — | 8-1/2 | 3-3/8 | 2 | 7.5 TR | 12 V DC | 1/2 IN. | 5/8 IN. |
| -8 | I | 2 | — | 8-1/2 | 3-3/8 | 2 | 7.5 TR | 24 V DC | 1/2 IN. | 5/8 IN. |
| -9 | II | 1 or 2 | 8 | 8-1/2 | 3-1/4 | 3 | 2.5 CFM | 120/50-60 Hz | 1/2 IN. | 5/8 IN. |
| -10 | II | 1 or 2 | 8 | 8-1/2 | 3-1/4 | 3 | 2.5 CFM | 208-240/50-60 Hz | 1/2 IN. | 5/8 IN. |
| -11 | II | 1 or 2 | 8 | 8-1/2 | 3-1/4 | 3 | 2.5 CFM | 12 V DC | 1/2 IN. | 5/8 IN. |
| -12 | II | 1 or 2 | 8 | 8-1/2 | 3-1/4 | 3 | 2.5 CFM | 24 V DC | 1/2 IN. | 5/8 IN. |
| -13 | II | 2 | — | 8-3/4 | 3-1/4 | 4 | 5.0 CFM | 120/50-60 Hz | 1/2 IN. | 5/8 IN |
| -14 | II | 2 | — | 8-3/4 | 3-1/4 | 4 | 5.0 CFM | 208-240/50-60 Hz | 1/2 IN. | 5/8 IN. |
| -15 | II | 2 | — | 8-3/4 | 3-1/4 | 4 | 5.0 CFM | 12 V DC | 1/2 IN. | 5/8 IN. |
| -16 | II | 2 | — | 8-3/4 | 3-1/4 | 4 | 5.0 CFM | 24 V DC | 1/2 IN. | 5/8 IN. |

MAXIMUM OPERATING PRESSURE DIFFERENTIALS (MOPD)

| ELECTRIC CURRENT | PERCENT OF RATED VOLTAGE | MOPD (PSI) |
|---|---|---|
| AC | 100 | 300 |
| | 85 | 300 |
| DC | 100 | 300 |
| | 80 | 300 |

RATING CONDITIONS FOR LIQUID REFRIGERANT BASED ON A FLOW OF 3.9 LBS./MIN./TON OF REFRIGERATION WITH A 2 P.S.I. PRESSURE DROP ACROSS THE VALVE, A CONDENSING TEMPERATURE OF 100 F., AND A SUCTION TEMPERATURE OF 40 F.
RATING CONDITIONS FOR REFRIGERANT GAS BASED ON A FLOW IN C.F.M. OF REFRIGERATION WITH A 5 P.S.I. PRESSURE DROP ACROSS THE VALVE, A CONDENSING TEMPERATURE OF 100 F., GAS WITH A 20 F.-SUPERHEAT ENTERING THE VALVE, AN EVAPORATOR TEMPERATURE OF 40 F.

NOTES

1. VALVES SHALL BE NORMALLY CLOSED.
2. VALVES SHALL OPERATE WHEN INSTALLED UP TO 20 DEGREES OF VERTICAL.
3. COILS SHALL BE REPLACEABLE.
4. COIL HOUSING ROTATES 360 DEGREES.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
7. PART NUMBERS: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17841-1.

REVIEW ACTIVITIES
Army - MD
Navy - SH
DSA - GS
USER ACTIVITIES
Army - MI, CE

This military standard has been approved for use by all Departments and of the Department of Defense. Selection for all new engineering and desi plications and for repetitive use shall be made from this document.

APPROVED 15 MAY 1962 REVISED (A) 30 AUG 1968 (B) 16 MAY 1975 (C) 18 NOV 76

| | | |
|---|---|---|
| P.A. ARMY GL<br>Other Cust<br>NAVY YD<br>USAF 99 | TITLE<br>VALVES, SOLENOID, REFRIGERANT-12 | MILITARY STANDARD<br>MS17841 |
| PROCUREMENT SPECIFICATION<br>MIL-V-23289 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.