DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

REVIEWER ACTIVITIES
ARMY-AR,MI
NAVY-AS
AIR FORCE-99
DLA-IS

USER ACTIVITIES
ARMY-AT,CR,ER
NAVY-MC,OS

DD FORM 672-1 (COORDINATED)

PROCUREMENT SPECIFICATION	INTERNATIONAL INTEREST	P.A.
MIL-N-25027		AIR FORCE-11 Other Cust ARMY-AV
SUPERSEDES		TITLE

NUT, SELF-LOCKING, EXTENDED WASHER, HEXAGON, REDUCED HEXAGON, C' BORE

MILITARY STANDARD

MS21450

PAGE 1 OF 2

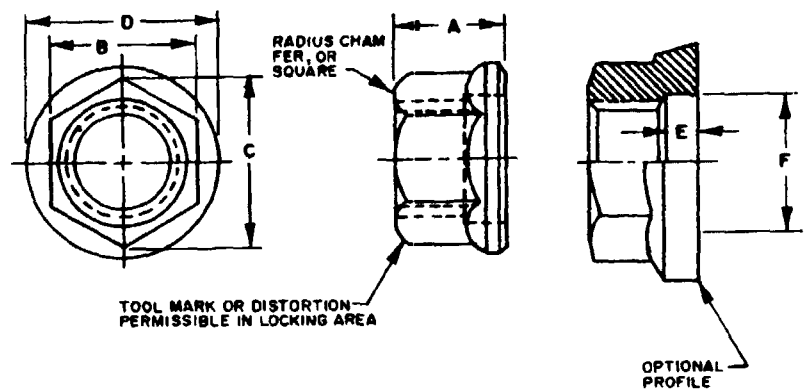


TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NO	THREAD 3B	A		B (NOTE 2)		C	D	E	F	APPROX WEIGHT LB/100	AXIAL STRENGTH LB/MIN	WRENCH TOR-IN LB/MAX
		MAX	MIN	MAX	MIN	MIN	MAX	± 005	± 005			
-08	.1640-32 UNJC	175	125	.190	181	.244	.290	.077	188	.09	1,720	40
-3	.1900-32 UNJF	190	155	252	243	.277	330	077	.216	.12	2,460	50
-4	2500-28 UNJF	.230	205	316	304	347	425	077	282	.26	4,580	130
-5	3125-24 UNJF	280	.250	.378	367	419	.525	.077	.347	.51	7,390	250
-6	3750-24 UNJF	.330	270	440	430	491	.620	.077	.412	.74	11,450	420
-7	4375-20 UNJF	380	320	504	.494	562	720	077	482	1.22	15,450	675
-8	5000-20 UNJF	410	.350	566	.556	63.	.820	.077	546	1 67	21,110	1,000

APPROVED 22 JAN 88 REVISED

FED SUP CLASS 5310

5310-1511

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

REQUIREMENTS

1 MATERIAL CARBON STEEL, GRADES 1020 (UNS G 10200) THRU 1050 (UNS G 10500), AND 1120 (UNS G 11200) THRU 1137 (UNS G 11370) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL, GRADES 4130 (UNS G 41300), 4340 (UNS G 43400), OR 8740 (UNS G 87400) IN ACCORDANCE WITH ASTM A29

2 PROTECTIVE COATING AND SURFACE TREATMENT CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. LUBRICANT: CETYL ALCOHOL, TYPE I, GRADE A IN ACCORDANCE WITH MIL-L-87132.

3 THREADS BEFORE LUBRICATION PER MIL-S-8879 BEARING SURFACE SHALL BE NORMAL TO THE AXIS OF THE PITCH DIAMETER WHEN MEASURED IN ACCORDANCE WITH MIL-N-25027.

4 HARDNESS 49HRC, MAXIMUM

5. SURFACE TEXTURE. SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICRODINCHES IN ACCORDANCE WITH ANSI-B-46.1

6 REMOVE ALL SHARP EDGES AND BURRS.

7 NUT SHALL BE TESTED FOR WRENCHING TORQUE BY THE USE OF A BOX OR SOCKET WRENCH.

8 TEST BOLTS SHALL BE 180,000 PSI MINIMUM.

9. EXAMPLE OF PART NUMBER

MS21450-08
- DASH NUMBER
- BASIC NUMBER

NOTES:

1 DIMENSIONS ARE IN INCHES

2. DIMENSION ACROSS FLATS INCLUDE DEFORMATION OF SELF-LOCKING DEVICE

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4 REFERENCED (GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES
ARMY-AT,CR,ER
NAVY-MC,OS

REVIEWER ACTIVITIES
ARMY-AR,MI
NAVY-AS
AIR FORCE-99
DLA-IS

APPROVED 22 JAN 88 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AIR FORCE-11 Other Cust ARMY-AV		NUT, SELF-LOCKING, EXTENDED WASHER, HEXAGON, REDUCED HEXAGON, C' BORE	MS21450
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:40Z
Check the source to verify that this is the current version before use.