

FED. SUP CLASS
43.3

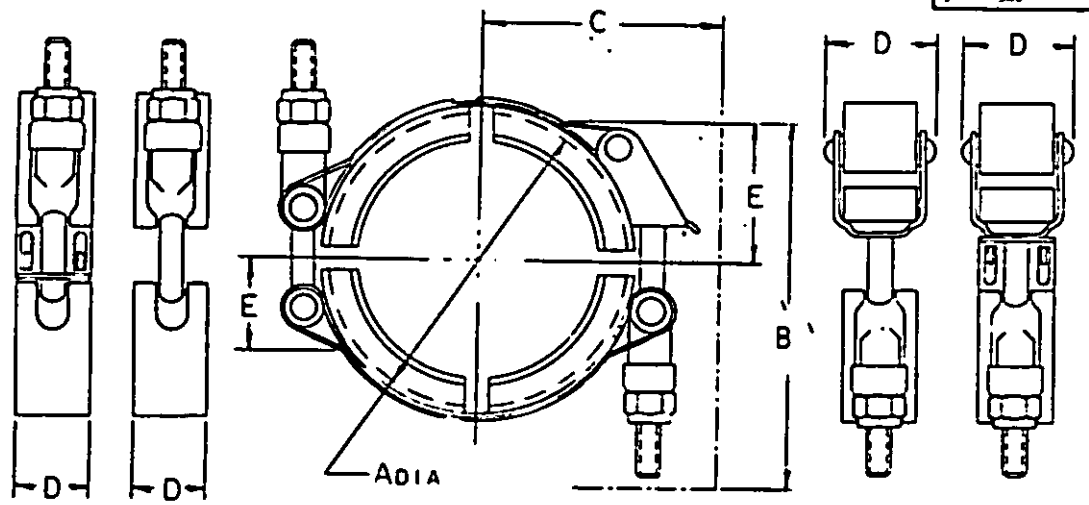

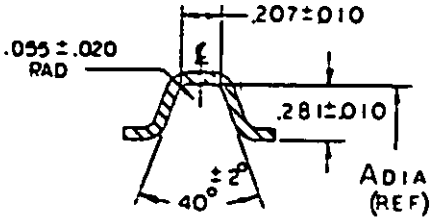

TYPICAL RETAINER SECTION
FOR ALL TYPES
SYMMETRICAL ABOUT ℄

MATERIAL: SEE PROCUREMENT SPECIFICATION
FINISH: SEE PROCUREMENT SPECIFICATION
REMOVE ALL BURRS AND SHARP EDGES
DIMENSIONS ARE IN INCHES
LATCH ELEMENTS ARE OPTIONAL WITHIN ENVELOPES SHOWN
ENVELOPE DIMENSIONS APPLY WHEN THE COUPLING IS IN THE TIGHTENED CONDITION AT THE MAXIMUM AND MINIMUM POSITIONS OF ITS DIAMETRAL RANGE.
EXAMPLES OF PART NUMBER: (00 REPRESENTS DASH NUMBER)

MS 27114-00B	•	BASIC LATCH COUPLING
MS 27114-00R	•	QUICK COUPLER LATCH COUPLING
MS 27114-00BR	•	BASIC AND QUICK COUPLER COUPLING
MS 27114-00BL	•	T-BOLT LATCH WITH REDUNDANT LATCH COUPLING
MS 27114-00RL	•	QUICK COUPLER LATCH WITH REDUNDANT LATCH COUPLING
MS 27114-00BRL	•	BASIC AND QUICK COUPLER LATCH WITH REDUNDANT LATCH COUPLING

QUICK COUPLER LATCH COUPLING SHALL CONTAIN ONLY ONE QUICK COUPLER LATCH
CERTAIN PROVISIONS OF THIS STANDARD (PROFILE DIMENSIONS AND FLANGE OD INCREMENT SIZE RANGES) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/19. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

©ENTIRE STANDARD REVISED.

APPROVED 5 MARCH 62 REVISED (A) 29 AUG 62 (B) 15 OCT 63 (C) 1 NOV 66

Review activities:
Navy - AS
USAF - 11

This military standard is approved by the Department of the Air Force and the NAVAL AIR SYSTEMS COMMAND and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - AS	TITLE COUPLING-CLAMP, GROOVED V-BAND, 1.750 TO 14.250 FLANGE O D (-65°F TO +800°F)	MILITARY STANDARD MS 27114 (ASG)
PROCUREMENT SPECIFICATION MIL-C-27536	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of the Air Force and the NAVAL AIR SYSTEMS COMMAND and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
Navy - AS
USAF - 11

DD FORM 672-1 (Limited coordination)

PROCUREMENT SPECIFICATION: MIL-C-27536

SUPERSEDES:

P.A. USAF-11
Other Cust Navy - AS

TITLE
COUPLING-CLAMP, GROOVED V-BAND
1.750 TO 14.250 FLANGE O D
(-65°F TO +800°F)

SHEET 2 OF

MILITARY STANDARD
MS 27114(ASG)

DASH NO.	FLANGE OD MS24563	AXIAL LOAD RATING (LB)	A +.03 -.06 DIA	LATCH ENVELOPE B MAX B	B MAX BL	B MAX R	B MAX RL	C MAX B	C MAX BL	C MAX R	C MAX RL	D MAX B	D MAX BL	D MAX R	D MAX RL	E MAX B	E MAX BL	E MAX R	E MAX RL	MIN BOLT SIZE	RATED TORQUE (LB IN.)	MAX WT (LB) B	MAX WT (LB) BL	MAX WT (LB) R	MAX WT (LB) RL
01	1.75	8,790	1.88					1.75		1.85												.35	.40	.39	.44
02	1.88	8,820	2.00					1.80		1.90												.36	.41	.40	.45
03	2.00	8,855	2.12					1.85		1.95												.37	.42	.41	.46
04	2.12	8,890	2.25					1.90		2.00												.39	.44	.43	.48
05	2.25	8,925	2.38	3.50	4.00	4.00	4.50	2.00		2.10						1.00		1.50				.40	.45	.44	.49
06	2.38	8,960	2.50					2.05		2.15		.80	.90	1.10	1.10					.250	50	.41	.46	.45	.50
07	2.50	8,995	2.62					2.10		2.20												.42	.47	.46	.51
08	2.62	9,025	2.75					2.20		2.30												.44	.49	.48	.53
09	2.75	9,060	2.88					2.25		2.35												.45	.50	.49	.54
10	2.88	13,850	3.00					2.45		2.50												.77	.87	.85	.95
11	3.00	13,925	3.12					2.50		2.60											100	.79	.89	.87	.97
12	3.12	14,000	3.25					2.60		2.65												.80	.90	.88	.98
13	3.25	14,100	3.38					2.65		2.70												.82	.92	.90	1.00
14	3.50	14,325	3.62					2.75		2.85												.85	.95	.93	1.03
15	3.75	14,500	3.88					2.90		2.95		.95	1.00								105	.88	.98	.96	1.06
16	4.00	14,725	4.12					3.00		3.10												.92	1.02	1.00	1.10
17	4.25	14,900	4.38					3.15		3.20												.95	1.05	1.03	1.13
18	4.75	15,300	4.88					3.40		3.45				1.25	1.25	1.15		1.70		.312	110	1.02	1.12	1.10	1.20
19	5.25	15,700	5.38					3.65		3.70											115	1.09	1.19	1.17	1.27
20	5.75	16,100	5.88	4.30	4.90	4.90	5.40	3.90		3.95												1.16	1.26	1.24	1.34
21	6.25	16,500	6.38					4.15		4.20											120	1.60	1.75	1.68	1.83
22	6.75	16,950	6.88					4.40		4.45												1.67	1.82	1.75	1.92
23	7.25	17,400	7.38					4.65		4.70											125	1.74	1.89	1.82	1.97
24	7.75	17,800	7.88					4.90		4.95											130	1.81	1.96	1.89	2.04
25	8.25	18,250	8.38					5.15		5.20												1.88	2.03	1.96	2.11
26	8.75	18,700	8.88					5.40		5.45											135	1.95	2.10	2.03	2.18
27	9.25	19,100	9.38					5.65		5.70		1.20	1.25								140	2.02	2.17	2.10	2.25
28	9.75	19,550	9.88					5.90		5.95												2.10	2.25	2.18	2.33
29	10.25	20,000	10.38					6.15		6.20											145	2.17	2.32	2.25	2.40
30	10.75	20,500	10.88					6.40		6.45											150	2.24	2.39	2.32	2.47
31	11.25	21,000	11.38					6.65		6.70												2.31	2.46	2.39	2.54
32	11.75	21,450	11.88					6.90		6.95											155	2.39	2.54	2.47	2.62
33	12.25	21,900	12.38					7.15		7.20											160	2.46	2.61	2.54	2.69
34	12.75	22,400	12.88					7.40		7.45												2.53	2.68	2.61	2.76
35	13.25	22,850	13.38					7.65		7.70											165	2.60	2.75	2.68	2.83
36	13.75	23,300	13.88					7.90		7.95											170	2.67	2.82	2.75	2.90
37	14.25	23,800	14.38					8.15		8.20												2.74	2.89	2.82	2.97

FED. SUP CLASS 5340

APPROVED 5 MARCH 1962 REVISED © FOR CHANGES SEE SHEETS 1 AND 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check the source to verify that this is the current version before use.