
NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6680

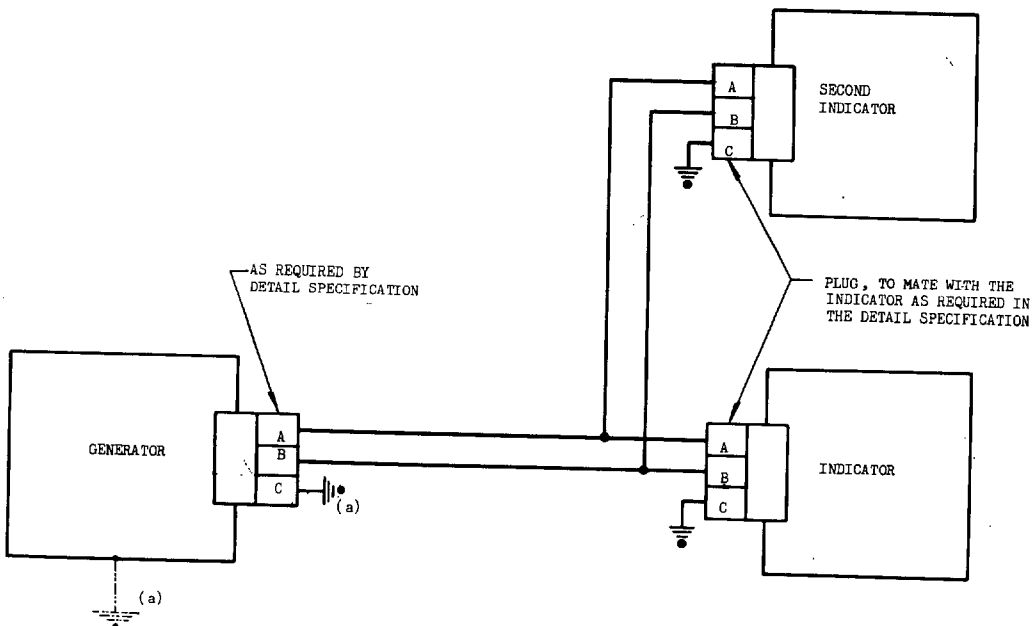

INSTALLATION SHALL BE IN ACCORDANCE WITH MIL-W-5088 AND MIL-E-7080.

CONNECTIONS SHOWN ARE FOR COUNTERCLOCKWISE ROTATION OF THE GENERATOR DRIVESHAFT AS VIEWED LOOKING AT THE SHAFT END. FOR CLOCKWISE ROTATION INTERCHANGE WIRES AT THE GENERATOR PLUG.

IF TWO INDICATORS ARE REQUIRED, THEY SHALL BE CONNECTED IN PARALLEL AS SHOWN.

ONE CABLE AS SHOWN IS REQUIRED FOR EACH ENGINE, REGARDLESS OF WHETHER INDICATORS ARE SINGLE OR DUAL.

RIGHT ANGLE PLUGS MAY BE USED IN LIEU OF STRAIGHT PLUGS.

SYSTEM FOR NON-INTEGRALLY LIT SINGLE AND DUAL INDICATORS.

(a) GENERATOR PIN "C" TO GROUND WHEN THREE PIN CONNECTOR REQUIRED IN THE DETAIL SPECIFICATION. WHEN TWO PIN CONNECTOR IS USED, CASE SHALL BE GROUNDED AS SHOWN IN PHANTOM.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 2 Dec 60 REVISED

P.A. Navy-Wep Other Cust USAF - ARDC Army - TC	TITLE WIRING DIAGRAM - TWO-POLE TACHOMETER GENERATOR AND PERCENT RPM TACHOMETER INDICATOR	MILITARY STANDARD MS33632
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AND10411	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6680

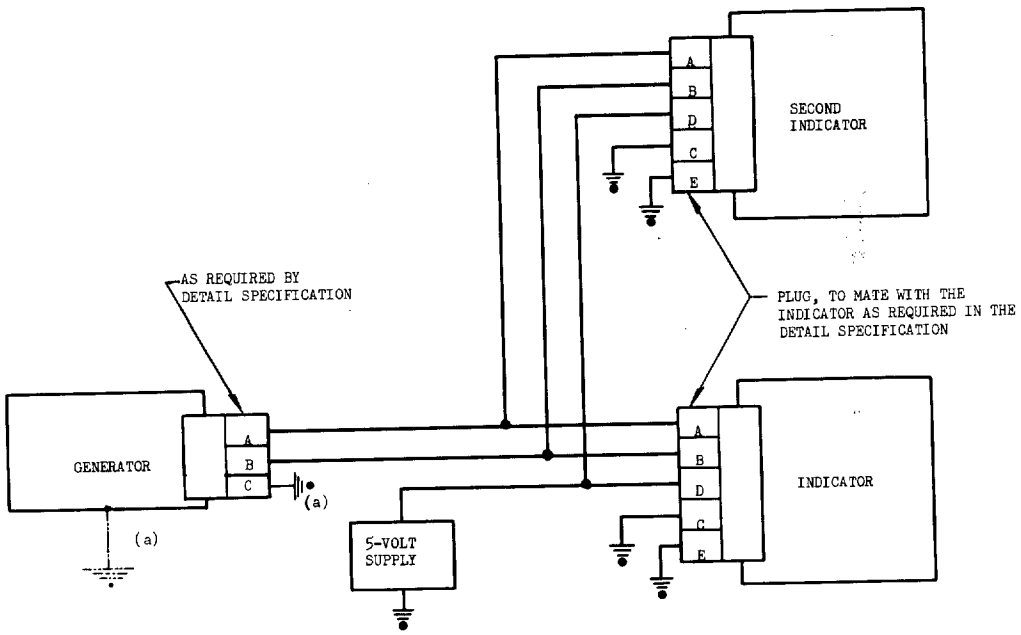

INSTALLATION SHALL BE IN ACCORDANCE WITH MIL-W-5088 AND MIL-E-7080.

CONNECTIONS SHOWN ARE FOR COUNTERCLOCKWISE ROTATION OF THE GENERATOR DRIVESHAFT AS VIEWED LOOKING AT THE SHAFT END. FOR CLOCKWISE ROTATION INTERCHANGE WIRES AT THE GENERATOR PLUG.

IF TWO INDICATORS ARE REQUIRED, THEY SHALL BE CONNECTED IN PARALLEL AS SHOWN.

RIGHT ANGLE PLUGS MAY BE USED IN LIEU OF STRAIGHT PLUGS.

SYSTEM FOR INTEGRALLY LIT SINGLE INDICATORS.

(a) GENERATOR PIN "C" TO GROUND WHEN THREE PIN CONNECTOR REQUIRED IN THE DETAIL SPECIFICATION. WHEN TWO PIN CONNECTOR IS USED, CASE SHALL BE GROUNDED AS SHOWN IN PHANTOM.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 2 Dec 60 REVISED

P.A. Navy - Wep Other Cust USAF - ARDC Army - TC	TITLE WIRING DIAGRAM - TWO-POLE TACHOMETER GENERATOR AND PERCENT RPM TACHOMETER INDICATOR	MILITARY STANDARD MS33632
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AND10411	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.