
FED. SUP CLASS
4730

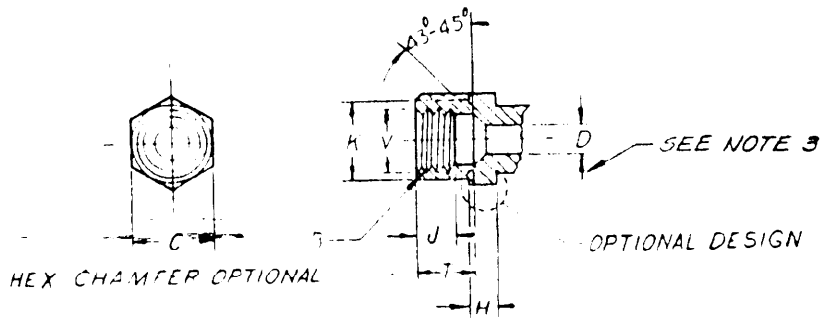

© FLARE SIZES AND DIMENSIONS

Flare Size	Thread B	Pitch Dia.	Minor Dia.	Hex. C		Min. Full Thread J	Depth T	Countersink Diameter V	Length E	Dia. K
1/4	7/16 - 20	0.4050-0.4104	0.3830-0.3916	0.625		0.27	0.340	0.45-0.47	0.24	Hex.
3/8	5/8 - 18	0.5889-0.5949	0.5650-0.5730	0.813		0.34	0.438	0.64-0.67	0.30	C
1/2	3/4 - 16	0.7094-0.7159	0.6820-0.6900	0.938		0.44	0.531	0.77-0.80	0.37	+.000
5/8	7/8 - 14	0.8286-0.8356	0.7980-0.8068	1.063		0.55	0.656	0.90-0.93	0.43	-.016
3/4	1-1/16 - 14	1.0151-1.0230	0.9850-0.9940	1.313		0.67	0.781	1.08-1.11	0.49	

NOTES:

1. THE FLARE SIZE SHALL CORRESPOND TO THE OUTSIDE DIAMETER OF THE TUBING.
2. ALL DIMENSIONS IN INCHES.
3. © DIMENSIONS AND TOLERANCES NOT SHOWN SHALL BE IN ACCORDANCE WITH SAE HANDBOOK FOR REFRIGERATION FITTINGS, SAE J513.
4. MINIMUM ACROSS CORNER DIMENSIONS OF HEXAGONS SHALL BE 1.092 TIMES THE NOMINAL WIDTH ACROSS THE FLATS OF THE HEXAGON.
5. THREADS SHALL CONFORM TO CLASS 2B OF ANSI B1.1 WITH MINOR DIAMETERS MODIFIED TO CLASS 3B LIMITS.
6. FITTING SEATS MUST BE CONCENTRIC WITH STRAIGHT THREAD PITCH DIAMETERS WITHIN 0.010 INCH TOTAL INDICATOR READING.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

REVIEW ISSUE
ARMY - ME, SH
NAVY - YD
USAF - 82
DLA - CS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 JAN 1958 REVISED (A) 22 MAR 1963 (B) 10 APR 1969 (C) 6 MAY 1970

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE CONNECTION END, INTERNAL FLARE, REFRIGERATION	MILITARY STANDARD MS 35867
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

VALIDATION

MS 35867C
NOTICE 1
31 October 1986

MILITARY SPECIFICATION

CONNECTION END, INTERNAL FLARE, REFRIGERATION

Military standard MS 35867C dated 8 May 1970 has been reviewed and determined to be current.

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - ME
DLA - GS

User Activities

Navy - MC, SH

Preparing Activity:
Army - GL

FSC 4730

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.