
FED. SUP CLASS
5965

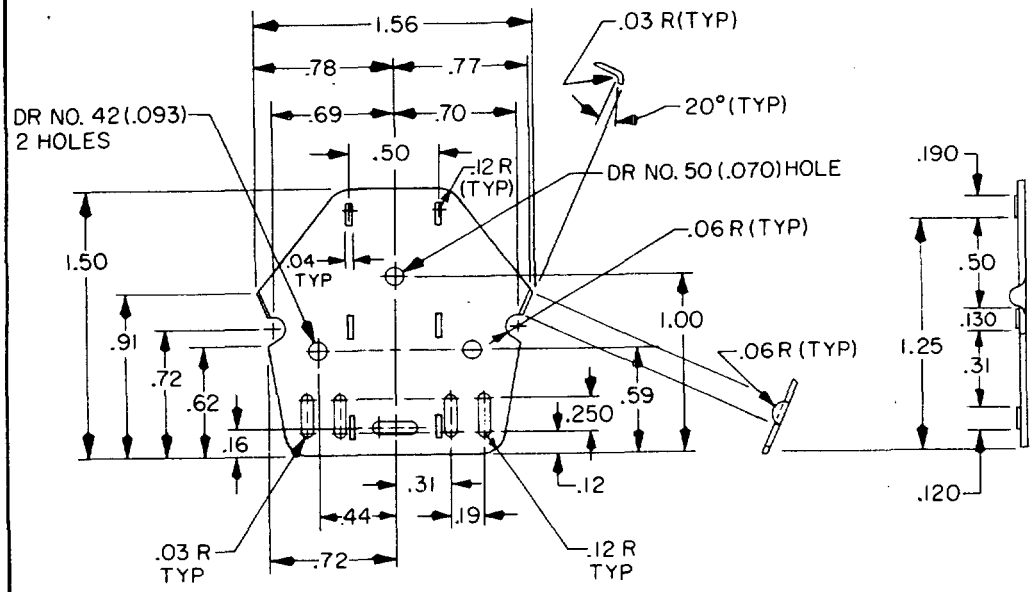

.031 TYPE 430 STAINLESS STEEL
BRIGHT ANNEALED

INCHES	MM	INCHES	MM	INCHES	MM
.03	.76	.250	6.35	.77	19.56
.04	1.02	.31	7.87	.78	19.81
.06	1.52	.44	11.18	.91	23.11
.070	1.78	.50	12.70	1.00	25.40
.093	2.36	.59	14.99	1.25	31.75
.120	3.05	.62	15.75	1.50	38.10
.130	3.30	.69	17.53	1.56	39.62
.16	4.06	.70	17.78		
.190	4.83	.72	18.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.002(.05 mm) for three place decimals and ±.01(.25 mm) for two place decimals.
4. Remove all burrs and sharp edges.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Reference documents shall be of the issue in effect on date of invitation for bid.

APPROVED 27 Jul 73 REVISED

User activities: Army
Navy - MC, AS, SH
Air Force - 11

Reviewer activities: Army
Navy
Air Force - 11, 13

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Army-EL Other Cust AF- 80 Navy - EC	International interest	TITLE GUIDE PLATE	MILITARY STANDARD MS 75107
Procurement Specification MIL-H-55353		SUPERSEDES: SC-D-2216	PAGE 1 OF 1

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5965-0128-5

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.