
AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document
Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

USER SYMBOLS:

REVIEWER SYMBOLS:
DLA-IS
USAF-82

FED SUP CLASS
5305

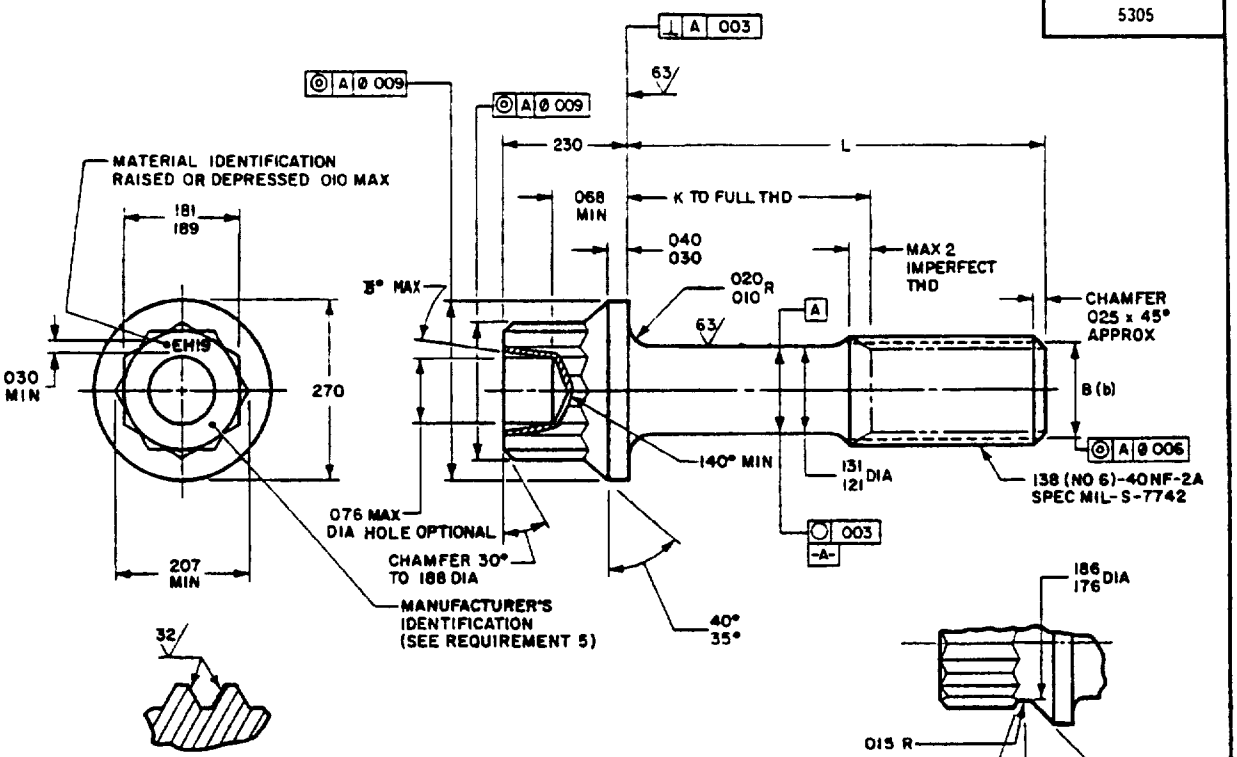

SECTION THRU THREAD PROFILE

OPTIONAL SHAPE OF HEAD

FIGURE 1

TABLE I DIMENSIONS AND WEIGHTS

PART NO	L	K +.000 -.060	APPROX WEIGHT LB/100	PART NO	L	K +.000 -.060	APPROX WEIGHT LB/100
MS9177-02	250	(a)	30	MS9177-13	938	375	55
MS9177-03	312	(a)	32	MS9177-14	1 000	438	.57
				MS9177-15	1 062	500	.59
MS9177-04	375	(a)	34				
MS9177-05	438	(a)	37	MS9177-16	1 125	562	61
MS9177-06	500	(a)	39	MS9177-17	1 188	625	64
				MS9177-18	1 250	688	66
MS9177-07	562	(a)	41				
MS9177-08	625	(a)	44	MS9177-19	1 312	750	68
MS9177-09	688	125	46	MS9177-20	1 375	812	70
				MS9177-21	1 436	875	73
MS9177-10	750	188	48				
MS9177-11	812	250	50	MS9177-22	1 500	938	75
MS9177-12	875	319	52				

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

(b) B=PITCH DIAMETER (PD)

A INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1963

B DENOTES CHANGE

APPROVED 15 AUG 60 REVISED (A) 20 NOV 63 (B) 13 JUNE 88

P.A. NAVY — AS Other Cust	TITLE: SCREW, MACHINE-CRES DOUBLE HEXAGON, EXTENDED WASHER HEAD, 125-40	MILITARY STANDARD MS 9177(AS)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET OF 2

DD FORM 1 JAN 72 672-1 (Continued) PLATE NO. 23699

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

(PROJ NO 5305-N015)

FED SUP CLASS
5305

USER SYMBOLS

REVIEWER SYMBOLS
DLA-IS
USAF-82

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

REQUIREMENTS

(B) 1 MATERIAL CORROSION AND HEAT RESISTANT STEEL PER AMS 5732

2. MANUFACTURER'S SPECIFICATION AMS 7478

3 PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645

4 SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED, 125 MICROINCHES PER AMSI B46 1

(B) 5 MANUFACTURER'S IDENTIFICATION THE MANUFACTURER'S SYMBOL PER MIL-STD-1291 (SEE FIG 1) SHALL BE MARKED ON THE BOLT HEAD (SEE FIG 1) MARKING MAY BE FORMED BY FORGING, STAMPING, OR LASER MARKING SHALL BE RAISED OR INDENTED 0 010 INCH MAXIMUM

NOTES

1 BREAK SHARP EDGES 003-.015 INCH UNLESS OTHERWISE SPECIFIED.

2. DIMENSIONS IN INCHES

3 UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR ±5°

4 DO NOT USE UNASSIGNED PART NUMBERS

5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

6 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

APPROVED 15 AUG 60 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY — AS Other Cust	TITLE SCREW, MACHINE-THRES DOUBLE HEXAGON, EXTENDED WASHER HEAD, [illegible]	MILITARY STANDARD MS 9177(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES.	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Cont Sheet) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO 22680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.