
MS9199

FED. SUP CLASS 4730

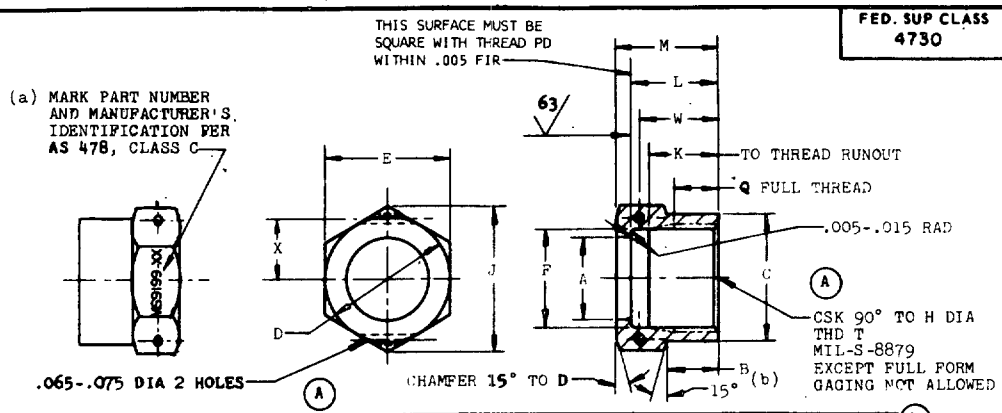

PART NO.	NOM TUBE OD REF	THREAD T	A DIA +.003 -.000	B ±.015 (b)	C DIA ±.005	D DIA	E	F DIA
MS9199-08	.500	.750 -16UNJF-3B	.570	.493	.865	.875	.865- .877	.689- .698
MS9199-09	.562	.8125-16UNJ-3B	.634	.493	.927	.937	.928- .940	.751- .760
MS9199-10	.625	.875 -14UNJF-3B	.698	.617	.990	1.000	.990-1.002	.805- .815
MS9199-11	.688	1.000 -12UNJF-3B	.770	.588	1.115	1.125	1.114-1.127	.918- .930
MS9199-12	.750	1.0625-12UNJ-3B	.834	.588	1.180	1.250	1.239-1.252	.981- .991
MS9199-14	.875	1.1875-12UNJ-3B	.961	.615	1.300	1.375	1.364-1.377	1.106-1.116
MS9199-16	1.000	1.3125-12UNJ-3B	1.089	.652	1.433	1.500	1.489-1.502	1.231-1.241
MS9199-18	1.125	1.500 -12UNJF-3B	1.217	.680	1.620	1.750	1.738-1.752	1.419-1.429
MS9199-20	1.250	1.625 -12UNJ-3B	1.347	.727	1.745	1.812	1.800-1.814	1.544-1.554
MS9199-24	1.500	1.875 -12UNJ-3B	1.617	.880	1.995	2.125	2.113-2.127	1.794-1.804
MS9199-28	1.750	2.250 -12UNJ-3B	1.890	.930	2.410	2.500	2.487-2.502	2.169-2.179
MS9199-32	2.000	2.500 -12UNJ-3B	2.167	1.060	2.660	2.750	2.737-2.752	2.419-2.429
MS9199-40	2.500	3.000 -12UNJ-3B	2.667	.860	3.200	3.250	3.237-3.252	2.919-2.929
MS9199-48	3.000	3.500 -12UNJ-3B	3.180	.910	3.700	3.812	3.798-3.814	3.419-3.429

NOM TUBE OD REF	H +.030 -.000	J MIN	K MAX	L ±.005	M	Q MIN	W	X	APPROX WEIGHT LB/100
.500	.750	.987	.569	.723	.828	.383	.648	.400- .420	1.747
.562	.812	1.059	.569	.723	.828	.383	.668	.427- .447	2.059
.625	.875	1.130	.667	.817	.927	.453	.777	.465- .485	2.230
.688	1.000	1.271	.738	.868	.968	.488	.818	.520- .540	2.777
.750	1.062	1.414	.738	.868	.968	.488	.818	.580- .600	3.501
.875	1.188	1.556	.765	.915	1.015	.515	.865	.645- .665	4.398
1.000	1.312	1.699	.786	.962	1.062	.536	.912	.715- .735	4.819
1.125	1.500	1.983	.800	.990	1.120	.550	.945	.840- .860	7.006
1.250	1.625	2.054	.810	1.017	1.167	.560	.967	.890- .910	7.072
1.500	1.875	2.411	.937	1.170	1.320	.687	1.100	1.040-1.060	9.860
1.750	2.250	2.838	.945	1.170	1.370	.695	1.170	1.255-1.275	14.740
2.000	2.500	3.123	1.050	1.300	1.500	.800	1.300	1.395-1.415	17.313
2.500	3.000	3.693	.850	1.100	1.300	.600	1.100	1.680-1.700	21.421
3.000	3.500	4.334	.900	1.150	1.350	.650	1.150	2.000-2.020	27.750

DIAMETERS A AND F SHALL BE CONCENTRIC TO THREAD PD WITHIN .004 FIR.

(a) MULTIPLE MARKING PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PARTS MUST BE MARKED BEFORE THREADING.

(b) TO THEORETICAL SHARP CORNER.

MATERIAL: ALUMINUM AMS 4121.
FINISH: ANODIC TREATMENT, AMS 2470 - DO NOT DYE.
A SURFACE ROUGHNESS: ANSI B46.1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT HEX.
PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED. FILLETS .005-.020 RAD OR CHAM.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

A

AS & AMS ARE SAE PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 9 Mar 62 REVISED A 13 Dec 72

Users activities: Navy - MC, XH
Reviewer activities: USAF - II

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A USAF-82 A Other Cust Navy- AS	TITLE NUT, TUBE COUPLING - ALUMINUM, AMS 4121	MILITARY STANDARD MS9199
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.