INCH-POUND
MS9281B
27 OCTOBER 1995
SUPERSEDING
MS9281A
26 OCTOBER 1972

MILITARY SPECIFICATION SHEET

SCREW, MACHINE-STEEL AMS 6322, BLACK OXIDE, HEXAGON HEAD, .138-40 UNJF-3A

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING DOCUMENT LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION (SEE REQT 13)

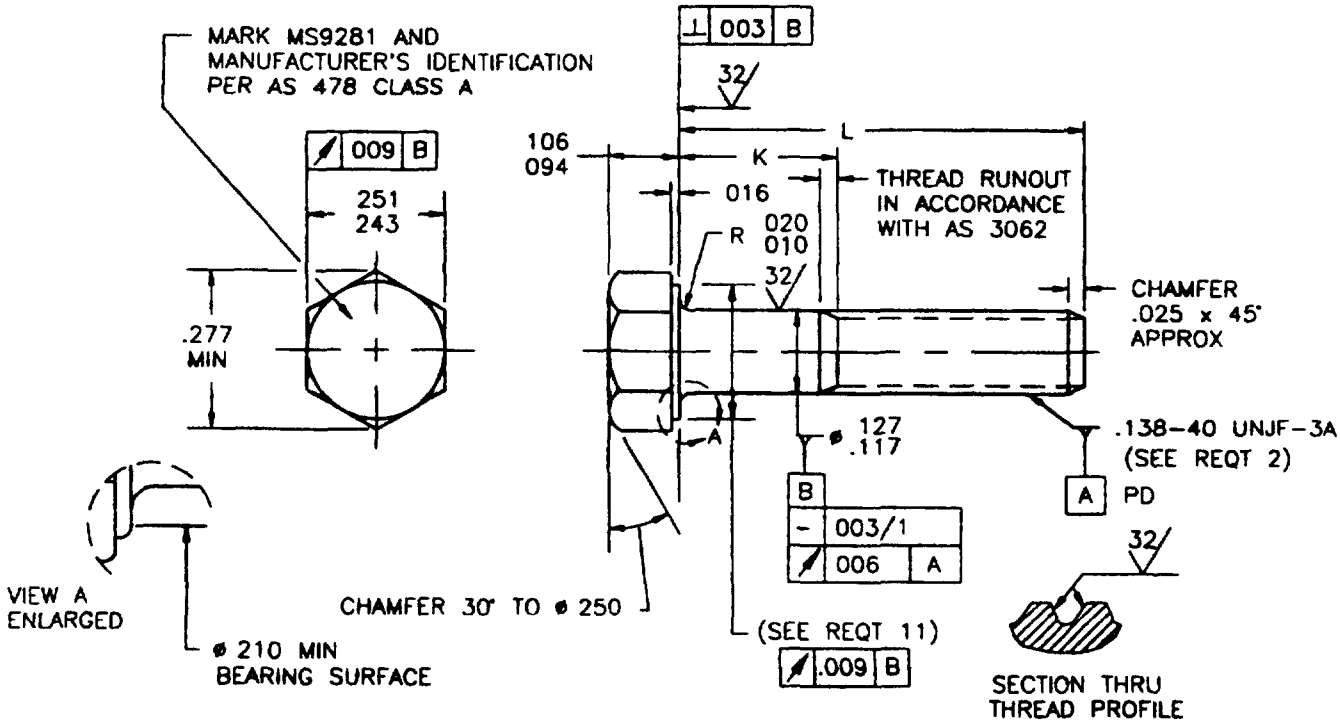


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-02	.250	.058-.078	.25
-03	.312	.058-.078	.27
-04	.375	.058-.078	.30
-05	.438	.058-.078	.32
-06	.500	.058-.078	.34
-07	.562	.058-.078	.37
-08	.625	.058-.099	.39
-09	.688	.102-.162	.42
-10	.750	.164-.224	.44
-11	.812	.226-.286	.46
-12	.875	.289-.349	.49
-13	.938	.352-.412	.51
-14	1.000	.414-.474	.53
-15	1.062	.476-.536	.56
-16	1.125	.539-.599	.58
-17	1.188	.602-.662	.61
-18	1.250	.664-.724	.63
-19	1.312	.726-.786	.65
-20	1.375	.789-.849	.68
-21	1.438	.852-.912	.70
-22	1.500	.914-.974	.72

(B) ENTIRE DOCUMENT REVISED

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 MATERIAL STEEL IN ACCORDANCE WITH AMS 6322

2 THREADS THREADS IN ACCORDANCE WITH MIL-S-8879

3 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ASME Y14 5M

4 HEAD TO SHANK FILLET HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS

5 MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640

6 HARDNESS, ROCKWELL C26-32.

7 FINISH, FINISH SHALL BE BLACK OXIDE TREATMENT IN ACCORDANCE WITH AMS 2485

8. SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI/ASME B46 1


9 TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°

10 EDGES BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED

11 BEARING SURFACE BEARING SURFACE SHALL BE FLAT AND WASHER FACED DIAMETER OF BEARING SURFACE SHALL BE EQUAL TO THE MAXIMUM WIDTH ACROSS FLATS WITHIN A TOLERANCE OF MINUS 10% IN ACCORDANCE WITH ANSI B18.2 1.

12 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9281-02



MS9281-02 INDICATES SCREW, MACHINE-STEEL AMS 6322, BLACK OXIDE, HEXAGON HEAD, .138-40 UNJF-3A, LENGTH .250

13 PROCUREMENT SPECIFICATION, AMS 7452 EXCEPT HEAD MUST BE UPSET

NOTES

1 ALL DIMENSIONS IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE

4 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

7 INACTIVE FOR NEW DEGIGN AFTER 26 OCTOBER 1972 NO SUPERSEDING DOCUMENT

MILITARY INTERESTS

CUSTODIANS
NAVY - AS
AIR FORCE - 11

PREPARING ACTIVITY
DLA-IS

(PROJECT: 5305-2115)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.