MIL-S-82492(OS)
26 July 1967

Superseding
NOTS XS 513 Rev. L
12 May 1967

MILITARY SPECIFICATION

SWITCH, INTEGRATOR

MARK 62 MOD 2

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements of one type Integrator Switch Mark 62 Mod 2. (See 6.1 for intended use and description.)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein, except as noted.

SPECIFICATION

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock Corner

MILITARY

MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case and Sheet, Overwrap, Watervapor-Proof or Waterproof, Flexible.

FSC -1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels

MILITARY

MIL-STD-105D	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definitions of, and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibration of Shipboard Equipment

DRAWINGS

BUREAU OF NAVAL WEAPONS

LD 540557	Tester, Integrator Switch Assembly
LD 540561	Switch, Integrator, Mark 62 Mod 2 (Assembly)and all documents listed thereon

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

OD 13770	Operation and Maintenance of Acceptance Tester for Integrator Switch Mark 62 Mod 1 and Mod 2

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the switch shall be in accordance with the requirements specified herein and with the applicable documents listed in BuWeps LD 540561.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the switch shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

3.3 Performance and product characteristics. The switch shall meet the following performance and product characteristics.

3.3.1 Insulation resistance. After being conditioned at a temperature of 75 plus or minus 5 degrees Fahrenheit (F) and a relative humidity of 75 plus or minus 5 percent for a period of not less than twenty-four hours, the insulation resistance shall not be less than 50 megohms. When the insulation resistance is measured during or subsequent to the environmental tests as specified in 4.5, there shall be no temperature or humidity conditioning other than that required by the individual environmental test and the insulation resistance shall then be 20 megohms minimum. The test potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall be measured between the following mutually insulated points:

a. The case.
b. One lead of the normally open circuit.
c. Other lead of the normally open circuit.
d. Either lead of the normally closed circuit.

3.3.2 Electrical continuity and circuit resistance. The following circuits shall be continuous and shall have a circuit resistance as follows:

3.3.2.1 Circuit resistance, normally closed circuit. The normally closed circuit shall have a resistance of not greater than 0.10 ohm.

3.3.2.2 Circuit resistance, normally open circuit. The normally open circuit shall have a resistance of not greater than 0.10 ohm, when closed.

3.3.3 Function. The switch shall function while stabilized at a temperature ranging from 35 to 120 degrees F.

3.3.3.1 Minimum acceleration. The normally closed circuit shall remain closed until the switch has sensed an acceleration of not less than 2.5g (g = unit of gravational acceleration), but not greater than 11g.

3.3.3.2 Functional acceleration. The normally open circuit shall close when the switch has sensed an acceleration and time interval equivalent to 17 plus or minus 1.5g-seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

3.3.3.3 Switch sequence. The normally closed circuit shall open before the normally open circuit closes when the switch, initially at rest, is subjected to an increasing acceleration.

3.3.4 Enclosure. The switch shall be hermetically sealed as defined in MIL-STD-108.

3.4 Environmental requirements. *Unless otherwise specified, the switch* shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.4.1 Temperature.

3.4.1.1 Storage condition. The switch shall withstand temperatures from minus 65 to plus 160 degrees F.

3.4.1.2 Operating condition. The switch shall meet the performance and product characteristics while at temperatures from 35 to 120 degrees F.

3.4.2 Acceleration. The switch shall withstand an acceleration of 25g for 4 seconds applied in the direction shown in Figure 1.

3.4.3 Vibration.

3.4.3.1 Standby condition. The switch shall withstand vibration as specified for Type I equipment in MIL-STD-167 up to 25 cycles per second (cps).

3.4.3.2 Operating condition. The switch shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less.

3.4.4 Shock.

3.4.4.1 Standby condition. The switch shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

3.4.4.2 Operating condition.

3.4.4.2.1 Major. The switch shall withstand a shock of 2400g peak magnitude in the direction shown in Figure 1. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. The normally open circuit shall not short to the case during or after shock.

3.4.4.2.2 Minor. The switch shall withstand two shocks of 1200g peak magnitude, 90 degrees apart and perpendicular to the major shock axis. The

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

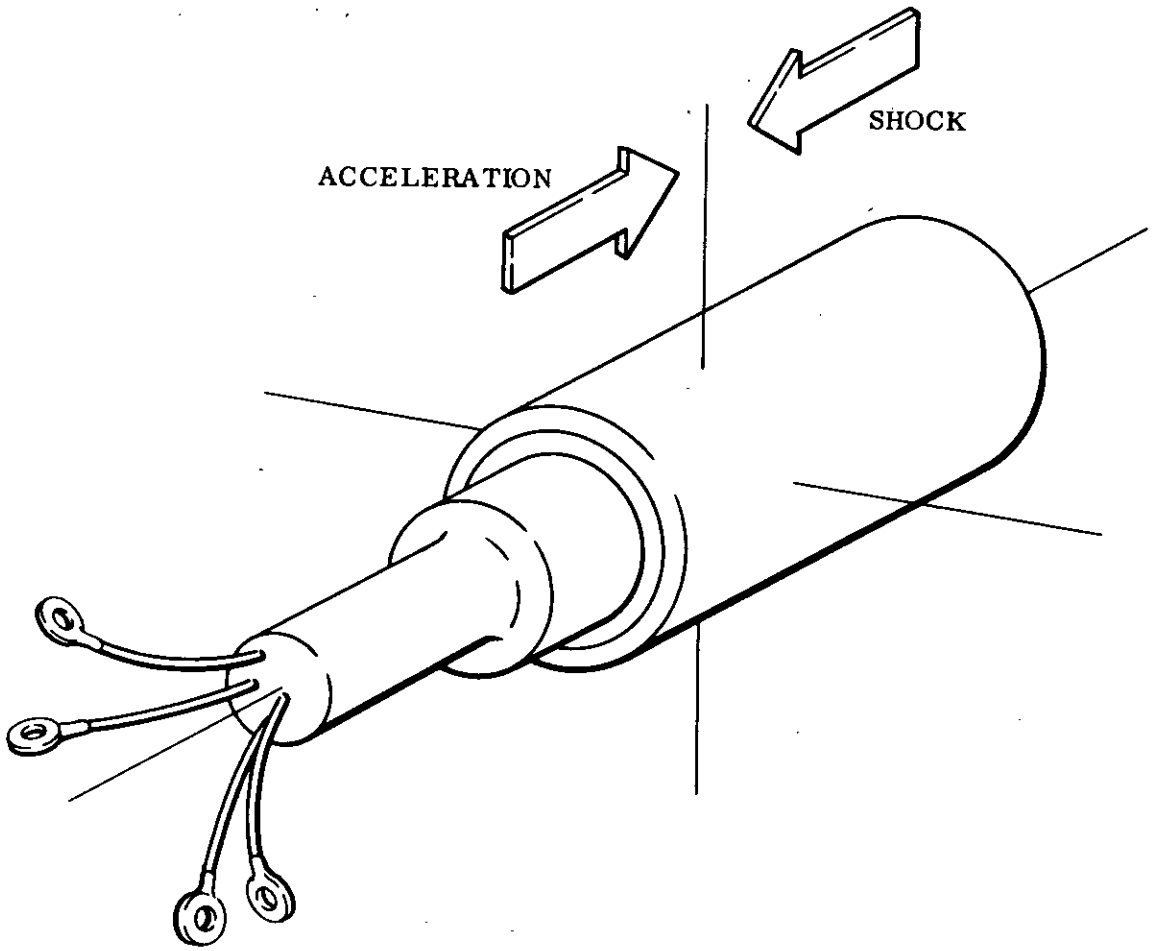


Figure 1. Environmental Testing Axes

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. The normally open circuit shall not short to the case during or after shock.

3.4.5 Current capacity. The switch circuits shall be capable of carrying a continuous current of 1 ampere.

3.5 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. *Unless otherwise specified in the contract or purchase order,* the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the switch shall be classified as follows:

a. Preproduction and periodic production inspection (See 4.5).
b. Quality conformance inspection (See 4.6).

4.3 Sampling. (See 6.2.1)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is, a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order, the number of product in each lot shall be three hundred (300).

4.3.2 Preproduction sample. A preproduction sample of twenty (20) switches, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the switch by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.3 Periodic production sample. From each succeeding lot of three hundred (300) or less, a random sample of fifteen (15) switches shall be selected. These sample units shall be subjected to the tests of 4.5. The switches shall be

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

considered satisfactory if they meet all specifications and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table I.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.
b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.
c. Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

Table I. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Quality Conformance Inspection	4.6	20	15
Temperature, Storage Condition	4.5.1.1	20	15
Quality Conformance Inspection	4.6	20	15
Vibration, Standby Condition	4.5.1.3	20	15
Shock, Standby Condition	4.5.1.5	20	15
Quality Conformance Inspection	4.6	20	15
Vibration, Operating Condition	4.5.1.4	20	15
Quality Conformance Inspection	4.6	20	15
Current Capacity	4.5.1.7	20	15
Acceleration	4.5.1.2	20	15
Quality Conformance Inspection	4.6	20	15
Temperature, Operating Condition	4.5.1.8	20	15
Low Extreme	4.5.1.8.1	10	7
Quality Conformance Inspection	4.6*	10	7
High Extreme	4.5.1.8.2	10	8
Quality Conformance Inspection	4.6**	10	8
Shock Operating Condition	4.5.1.6	20	15

*Perform functional tests 4.6.1.4, only at 35 plus 5 minus 0 degrees F.
**Perform functional tests 4.6.1.4, only at 120 plus 0 minus 5 degrees F.

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the switch inspected as specified in 4.6.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests:

	Equipment	Capability
a.	Low resistance measuring device	0.00 to 0.30 ohm: accuracy plus or minus 5 percent.
b.	Centrifuge	0 to 25g; accuracy of plus or minus 0.05g from 0 to 15g; monitor a minimum of 12 circuits during rotation.
c.	Megohmmeter	0 to 50 megohms; accuracy plus or minus 10 percent at 50 and 20 megohms; 500 volts DC potential.
d.	Tester, Integrator Switch Assembly	BuWeps LD 540557. Operate in accordance with OD 13770.
e.	Pressure vessel	Subject switch to a dry air or nitrogen pressure of 95 plus or minus 5 psig.
f.	Conditioning chamber	Maintain temperature at 75 plus or minus 5 degrees F and a relative humidity of 75 plus or minus 5 percent.
g.	Temperature chamber	Maintain temperature at: Plus 35 plus 5 minus 0 degrees F. Plus 80 plus 0 minus 5 degrees F. Plus 120 plus 0 minus 5 degrees F.
h.	Ohmmeter	0 to 5 ohms; accuracy plus or minus 10 percent.

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and pieces of equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests.

	Equipment	Capability
a.	Vibration testing machine	Control frequency from 20 to 2000 cps while subjecting a test item to 0.10-inch double amplitude or 10g acceleration,

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the currentversion before use.

Equipment	Capability
	whichever is less; maintain direction of vibration along specified axes.
b. Shock equipment, standby	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape of 5 plus 3 minus 0 milliseconds time duration; maintain direction along specified axes.
c. Shock equipment, operating	Apply shocks of up to 2400g plus or minus 10 percent; a one-half sine wave pulse shape of 1.00 plus or minus 0.25 millisecond time duration; maintain direction along specified axes.
d. DC power supply	Regulate direct current at 1 plus 0.0 minus 0.1 ampere through test item load (0.1 ohm maximum).
e. Voltmeter	0.00 to 0.50 volts DC; accuracy plus or minus 3 percent.
f. Temperature chamber	Maintain temperature at: Minus 65 plus 5 minus 0 degrees F. Plus 160 plus 0 minus 5 degrees F.

4.4.3 Test conditions. Unless otherwise specified, the switch shall be subjected to the preproduction and periodic production tests and quality conformance inspection tests under the following conditions:

a. Temperature	-Room ambient (65 to 95 degrees F).
b. Altitude	-Normal ground atmospheric pressure
c. Humidity (Relative)	-Room ambient up to 95 percent.

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples, after satisfactorily passing the quality conformance inspection detailed in 4.6, shall be subjected to the tests specified in 4.5.1.

4.5.1 Test procedure. Subject the switch to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection, as specified in Table I shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the switch to pass any one of these tests shall constitute a defective unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.5.1.1 Storage condition. The switch shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The switch shall then be subjected to room temperature for not less than 4 hours, prior to performing subsequent tests.

4.5.1.2 Acceleration. The switch, mounted as shown in Figure 2, shall be subjected to an acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 1 for not less than 4 seconds.

4.5.1.3 Vibration, standby condition. The switch, rigidly mounted as shown in Figure 2, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 1.

4.5.1.4 Vibration, operating condition. The switch, rigidly mounted as shown in Figure 2, shall be subjected to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minutes, once in each axis.

NOTE: Instrumentation used for the shock test shall not employ a filter with a cut-off frequency below 10 kc.

4.5.1.5 Shock, standby condition. Subject the switch to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, having a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 1. Mount the switch in a manner similar to that shown in Figure 2.

4.5.1.6 Shock, operating condition. The switch shall be mounted as shown in Figure 2, and subjected to the following tests:

4.5.1.6.1 Major. Subject the switch to a shock of 2400 plus or minus 240g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shock in the direction shown in Figure 1. The normally open circuit shall not short to the case during or after shock.

4.5.1.6.2 Minor. Subject the switch to a shock of 1200 plus or minus 120g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shock in two directions 90 degrees apart and perpendicular to the major shock axis. The normally open circuit shall not short to the case during or after shock.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

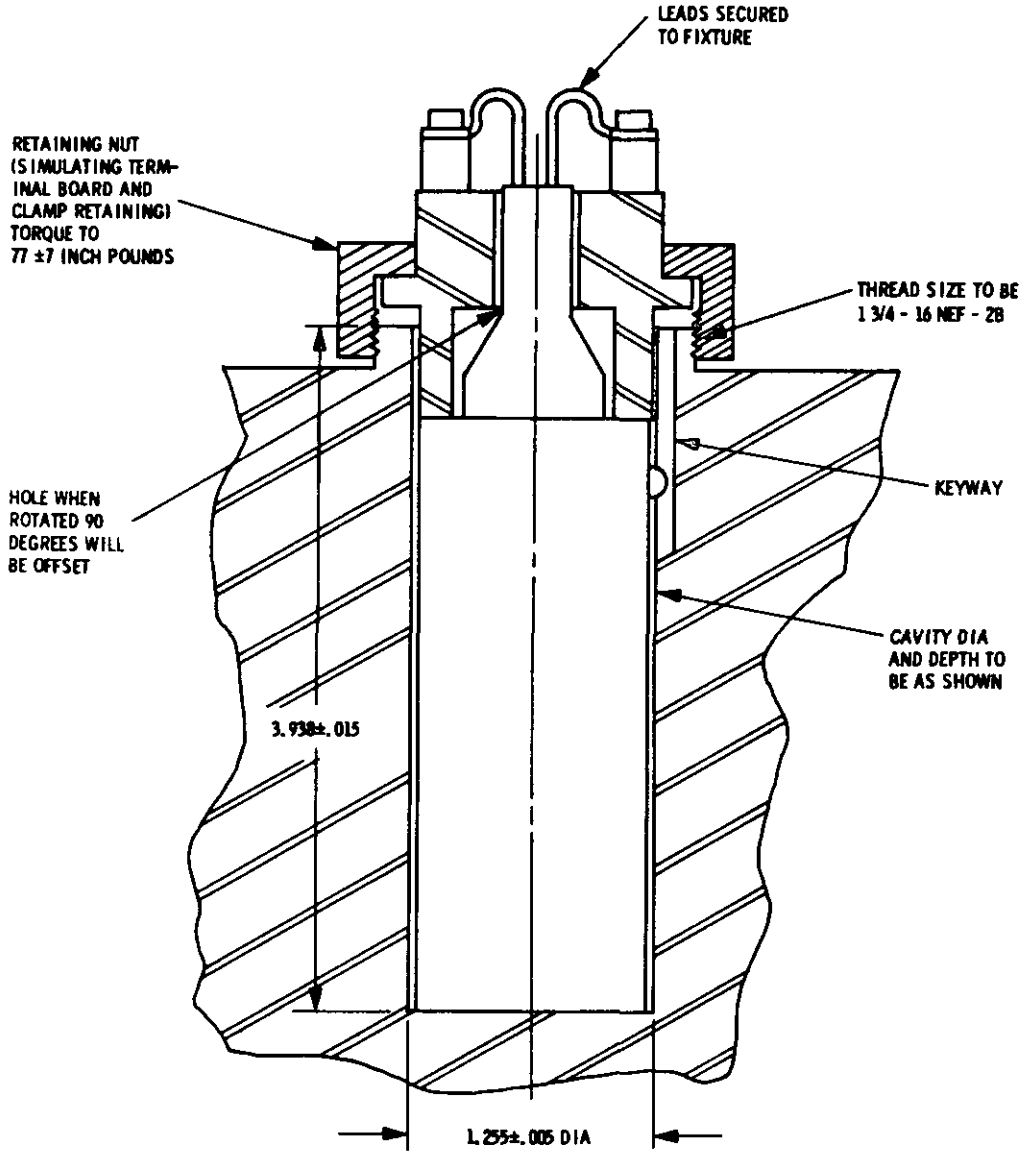


Figure 2. Vibration and Shock Test Fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.5.1.7 Current capacity. Apply a direct current of 1 plus 0.0 minus 0.1 ampere between the terminals of the normally closed circuit for not less than 30 seconds. Measure the voltage across the leads during the application of the current. The voltage shall not be greater than 0.1 volt. Repeat the test, measuring the current capacity of the circuit between the terminals of the normally open circuit when subjecting the switch to an acceleration of 12g minimum. The voltage shall not be greater than 0.1 volt.

4.5.1.8 Temperature, operating condition. Divide the sample into two groups as indicated in Table I. One of the groups of switches shall be subjected to the low temperature test as specified in 4.5.1.8.1 and the other group of switches shall be subjected to the high temperature test as specified in 4.5.1.8.2.

4.5.1.8.1 Low extreme. The switch shall be subjected to a temperature of 35 plus 5 minus 0 degrees F for not less than 2 hours. The switch shall pass the quality conformance inspection test of this specification while at this temperature.

4.5.1.8.2 High extreme. The switch shall be subjected to a temperature of 120 plus 0 minus 5 degrees F for not less than 2 hours. The switch shall pass the quality conformance inspection test of this specification while at this temperature.

4.6 Quality conformance inspection. Samples, selected using the plans and procedures set forth in Table II of this specification, shall be subjected to the tests and examinations as described in 4.6.1.

4.6.1 Test procedure. The switch shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the switch to pass the tests and examinations shall constitute a failure.

4.6.1.1 Insulation resistance. Place the switch in a conditioning chamber and maintain the temperature at 75 plus or minus 5 degrees F and the humidity at 75 plus or minus 5 percent for a period of twenty-four hours. Remove the switch from the chamber and within 10 minutes measure the insulation resistance between the mutually insulated points listed below. The applied potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall be not less than 50 megohms. When this test is performed during or subsequent to the environmental tests specified in 4.5.1, there shall be no temperature or humidity conditioning other than that required by the individual environmental test; the insulation resistance shall then be 20 megohms minimum. The mutually insulated points are:

a. Case.
b. One lead of the normally open circuit.
c. Other lead of the normally open circuit.
d. Either lead of the normally closed circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

Table II. Quality Conformance Tests and Examinations and AQL

Test or Examination	Sampling Plan	AQL	Test Paragraph
Insulation resistance	*	1.0	4.6.1.1
Resistance, normally closed circuit	*	2.5	4.6.1.2
Resistance, normally open circuit	*	1.0	4.6.1.3
Minimum acceleration	**	**	4.6.1.4.1
Functional acceleration	**	**	4.6.1.4.2
Switch sequence	*	1.0	4.6.1.4.3
Enclosure test	*	1.0	4.6.1.5
Visual examination	**	**	4.6.1.6
Preservation, packaging, packing and marking	**	**	4.7

*MIL-STD-105D Inspection Level II
**One-hundred percent inspection; defect is cause for rejection of individual unit.

4.6.1.2 Resistance, normally closed circuit. Measure the resistance between the leads of the normally closed circuit, using the low resistance measuring device specified in 4.4.1a. The resistance shall be not greater than 0.10 ohm.

4.6.1.3 Resistance, normally open circuit. Mount the switch as specified in 4.6.1.4.2 and subject it to an acceleration of 12 plus or minus 1g for greater than 5 seconds. Using the low resistance measuring device specified in 4.4.1a, measure the resistance of the normally open circuit. The resistance shall be not greater than 0.10 ohm.

4.6.1.4 Functional tests. Subject the switch to the following tests while stabilized at 35 plus 5 minus 0 degrees F; 80 plus or minus 15 degrees F, and 120 plus 0 minus 5 degrees F.

4.6.1.4.1 Minimum acceleration. Mount the switch as specified in 4.6.1.4.2 and connect the low resistance measuring device, specified in 4.4.1a, between the leads of the normally closed circuit. Subject the switch to an

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:12Z
Check the source to verify that this is the current version before use.

acceleration of 2 plus or minus 0.5g, using the centrifuge specified in 4.4.1b. The resistance of the circuit shall be not greater than 0.10 ohm.

4.6.1.4.2 Functional acceleration. Mount the switch in the fixture of the integrator switch tester, specified in 4.4.1d; subject the switch to the acceleration listed in Table III in the direction shown in Figure 3, using the centrifuge specified in 4.4.1b. The switch closure g-second product shall be computed as follows:

> Switch closure g-second product equals the difference of total switch closure time minus 37 percent of fixture swing time, times the acceleration in g' s for that run.

The switch closure g-second product shall be as listed in Table III. If the switch circuits do not return to the normal positions during testing, the timing weight gear rack and pinion may not have reengaged. Recycle test fixture as required to obtain normal conditions of circuits. If the switch does not reset, stop centrifuge and remove switch. Hold switch in hand with leads up; shake vigorously to reorient pinion gear. The sound of reengagement will be noted when the normally closed circuit closes. Replace switch in fixture and continue testing.

Table III. Switch Closure

Acceleration in g' s	Switch Closure g-second product
11 ±0.05	17 ±1.5
13 ±0.05	17 ±1.5
15 ±0.05	17 ±1.5

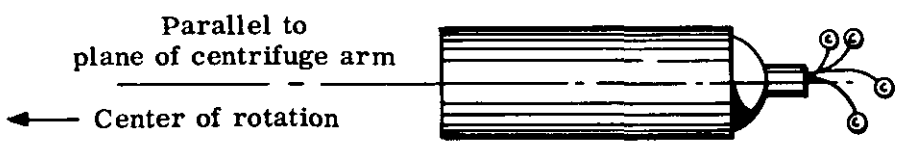


Figure 3. Testing Position

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

4.6.1.4.3 Switch sequence. Mount the switch as specified in 4.6.1.4.2 and connect the low resistance measuring device, specified in 4.4.1a, between the leads of the normally open circuit and the ohmmeter, specified in 4.4.1h, between the leads of the normally closed circuit. Subject the switch to an increasing acceleration. The normally closed circuit shall open before the normally open circuit closes.

4.6.1.5 Enclosure test. Place the switch in the pressure vessel, specified in 4.4.1e. The pressure vessel shall then be pressurized with 95 plus or minus 5 psig of dry air or nitrogen for not less than one hour. The pressure shall then be released and the switch removed from the pressure vessel and immediately submerged in water to which a wetting agent has been added (3 cc of "TRITON X 100" 3 percent solution mixed in 5 gallons of distilled water). Submerge the switch in the position shown in Figure 3. Any indication of the formation of bubbles around any of the sealing edges of the switch shall be cause for rejection. The switch shall be acceptable if there is no leakage or formation of bubbles after a five minute minimum immersion period.

4.6.1.6 Visual examination. Visual examination shall be made on each switch submitted for delivery to the procuring agency. The switch shall be examined for conformance to the requirements of good workmanship in 3.5. Nonconformance shall be cause for rejection of individual unit.

4.7 Preservation, packaging, packing, and marking. The switch shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (See 6.2b and 6.4).

5.1.1 Level A.

5.1.1.1 Cleaning. The switch shall be cleaned in accordance with Method C-1, MIL-P-116.

5.1.1.2 Drying. The switch shall be dried in accordance with Method D-2, MIL-P-116.

5.1.1.3 Unit packaging. The switch shall be individually packaged in accordance with Method 1A-8, MIL-P-116.

5.1.2 Level C. Cleaning, drying, preservation and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:12Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be Level A or C as specified (See 6.2c and 6.4).

5.2.1 Level A. Unless otherwise specified in the contract, order or requisition, the switch shall be packed in exterior type shipping containers, PPP-B-621, of uniform size and shape, with the minimum cube and tare consistent with the protection required. The gross weight of each pack shall be limited to approximately 100 lbs. Containers shall be provided with a case liner, MIL-L-10547, and shall be closed and strapped in accordance with PPP-B-621.

5.2.2 Level C. The switch packaged as specified in 5.1.2, shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. The switch is intended to be used in the fuzing system of a depth charge to sense velocity.

6.1.2 Description. The switch is a device designed to close the normally open circuit when an acceleration time product of 17g-seconds is sensed.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Required level of preservation and packaging.

c. Required level of packing.

d. Any exceptions to this specification.

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

6.3 Definitions. For the purpose of this specification the following definitions have been established.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

6.3.1 Unit condition.

6.3.1.1 Operating. The condition of the switch during missile operation.

6.3.1.2 Standby. The condition of the switch when aboard ship and is assembled with the end item.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in FED-STD-102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-S-82492(OS) SWITCH, INTEGRATOR MARK 62 MOD 2

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

C-8870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:12Z
Check the source to verify that this is the current version before use.