INCH-POUND

MIL-PRF-55182/5L
AMENDMENT 1
30 August 1999

PERFORMANCE SPECIFICATION

RESISTORS, FIXED, FILM, NONESTABLISHED RELIABILITY,
ESTABLISHED RELIABILITY, AND SPACE LEVEL, STYLE RNR65

This amendment forms a part of MIL-PRF-55182/5L, dated 9 June 97, and is approved for use by all Departments and Agencies of the Department of Defense.

FIGURE 1, delete and substitute.

"

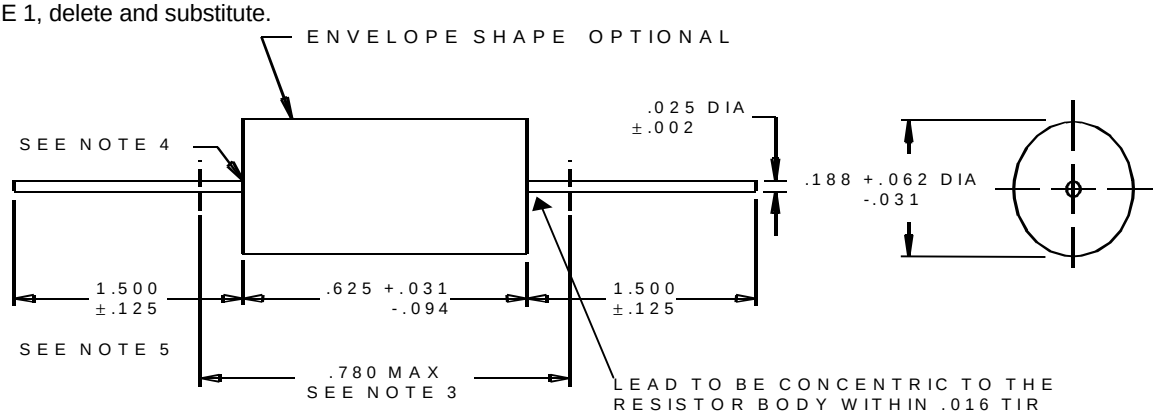

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.062	1.57	.625	15.88
.016	0.41	.094	2.39	.780	19.81
.025	0.64	.125	3.18	1.500	38.10
.031	0.79	.188	4.78		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The maximum length is "clean lead" to "clean lead".
4. The end of the body shall be that point at which the body diameter equals the nearest drill size larger than 250 percent of the nominal lead diameter.
5. Lead length for new design and tape and reel packaging shall be 1.00 inch +.625 inch, -.00 inch (25.4 mm +15.80 mm, -0.00 mm).
6. Lead concentric tolerance is to be measured at the point of lead egress from the resistor body.

FIGURE 1. Style RNR65 resistors. 2/"

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

Review activities:
Army - AR
Navy - AS, CG, MC, OS
Air Force - 19, 99

(Project 5905-1573)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.