

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS26

This specification sheet is approved for use by the Department of the Air Force, Space Division and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-123(NA).

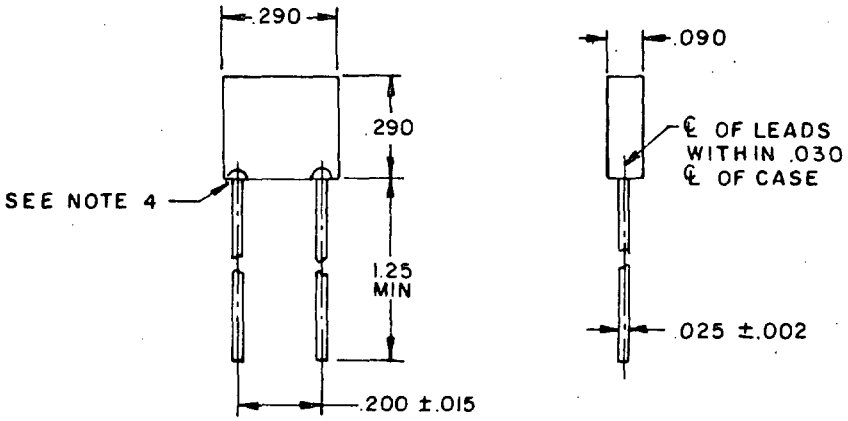



CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.002	.05	.100	2.54
.015	.38	.200	5.08
.025	.64	.290	7.37
.090	2.29	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).
4. At point of lead egress uninsulated metal may be present. External conductors should not be within .0625 (1.588 mm) of this area without supplemental insulation. Insulating coating shall not extend more than .010 (.25 mm) along lead wires.

URE 1. Style CKS26 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.

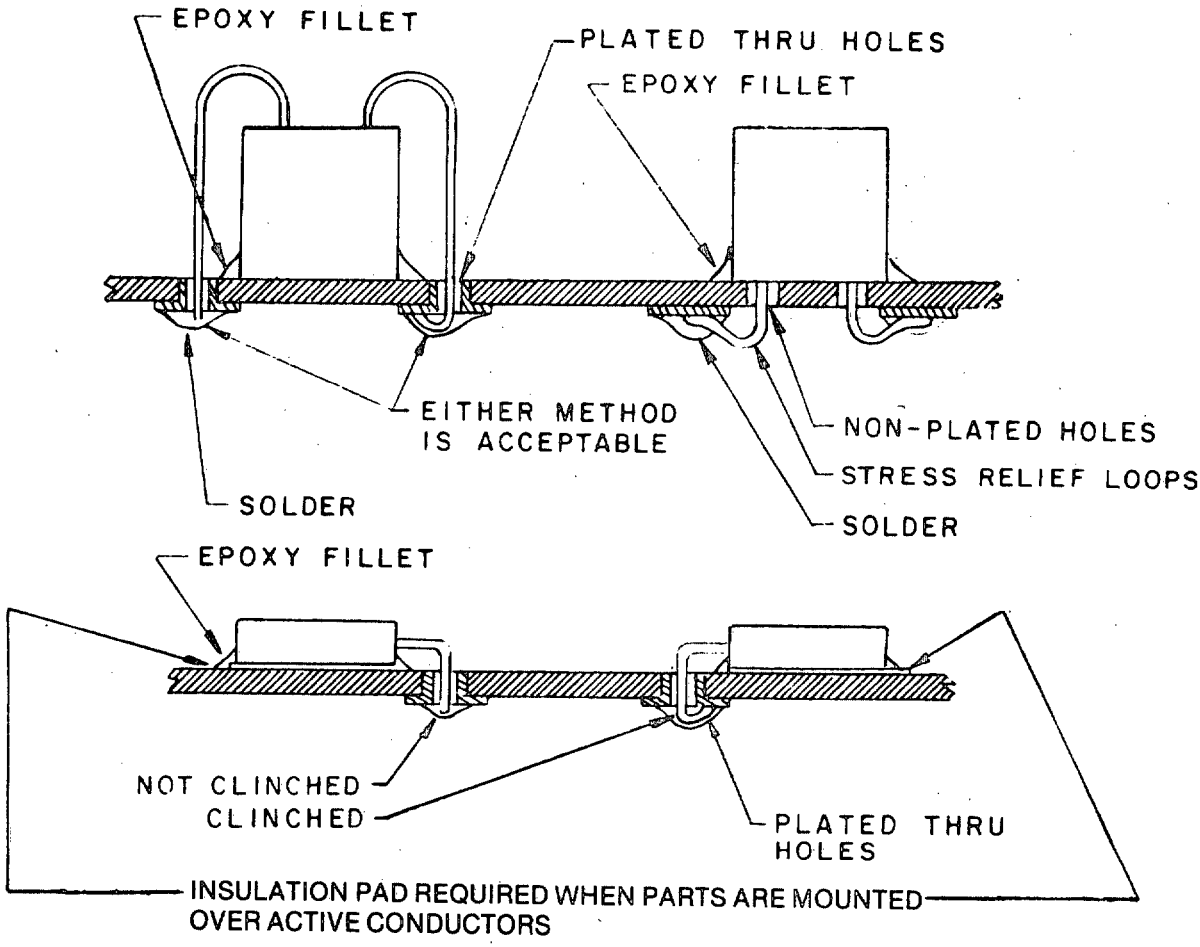


FIGURE 2. Mounting Methods for Stress Relief

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS26 characteristics.

Part number	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A09BXB124KC	120000	K	BX	50
M123A09BXB154KC	150000			
M123A09BXB184KC	180000			
M123A09BXB224KC	220000			
M123A09BXB274KC	270000			
M123A09BXB334KC	330000			
M123A09BXB394KC	390000			
M123A09BXB474KC	470000			
M123A09BXB564KC	560000			
M123A09BXB684KC	680000			
M123A09BXB824KC	820000			
M123A09BXB105KC	1000000			

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: The case of this style shall be formed by an extension of the dielectric material with a thin insulating coat.

Lead wire: Type C4 or C5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Radiographic inspection: Not applicable.

Marking: In accordance with MIL-C-123(NA), example 2.

Application notes: The leads of this style capacitor are soldered into metallized slots in the ceramic body. The following cautions must be observed:

a. Do not allow conductors to contact the base of the capacitor.
b. When forming the leads, care shall be exercised to avoid stressing the lead to body joint connection.
c. Stress relief for the lead must be provided when mounting (see figure 2).

Custodian:
Air Force - 19

Review activities:
DLA - ES

Preparing activity:
Air Force - 19

Agent:
DLA - ES

(Project 5910-F372)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.