INCH-POUND


MIL-C-123/9A(USAF)
15 Mar 90
SUPERSEDING
MIL-C-123/9(USAF)
30 June 1981

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS26

This specification sheet is approved for use by the Space Division (SD/ALM), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

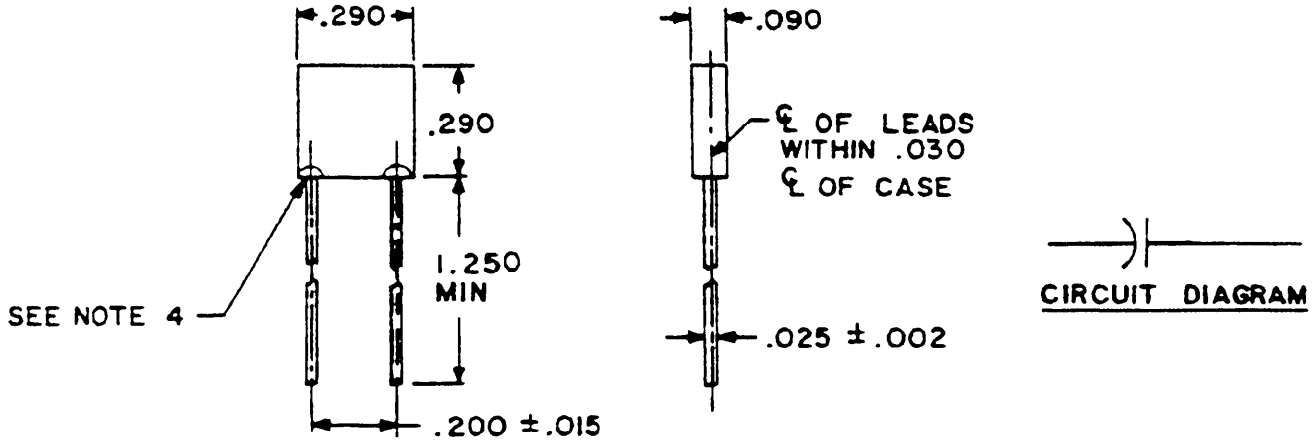

Inches	mm	Inches	mm
.002	0.05	.090	2.29
.015	0.38	.200	5.08
.025	0.64	.290	7.37
.030	0.76	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. At point of lead egress uninsulated metal may be present. External conductors should not be within .0625 (1.588 mm) of this area without supplemental insulation. Insulating coating shall not extend more than .010 (0.25 mm) along lead wires.
(A) 5. Lead length may be a minimum of .625 (15.88 mm) for use in tape and reel automatic insertion equipment, when specified.

FIGURE 1. Style CKS26 capacitors.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(A) Case type: The case of this style shall be formed by an extension of the dielectric material.

(A) Lead wire: Type W-22 or W-51 of MIL-STD-1276.

Capacitance value: See table I.

(A) TABLE I. Style CKS26 characteristics.

Part number	Capacitance	Rated voltage	Part number	Capacitance	Rated voltage
	µF	volts		µF	volts
M123A09BXC473KC	.047	100	M123A09BXB274KC	.27	50
M123A09BXC563KC	.056	100	M123A09BXB334KC	.33	50
M123A09BXC683KC	.068	100	M123A09BXB394KC	.39	50
M123A09BXC823KC	.082	100	M123A09BXB474KC	.47	50
M123A09BXC104KC	.10	100	M123A09BXB564KC	.56	50
M123A09BXC124KC	.12	100	M123A09BXB684KC	.68	50
M123A09BXC154KC	.15	100	M123A09BXB824KC	.82	50
M123A09BXB184KC	.18	50	M123A09BXB105KC	1.00	50
M123A09BXB224KC	.22	50			

(A) Capacitance tolerance: ±10 percent

Operating temperature: -55°C to +125°C.

(A) Voltage-temperature limits: BX characteristic.

Voltage rating: See table I.

Radiographic inspection: Not applicable.

Marking: In accordance with MIL-C-123, example 2.

(A) Application notes: The leads of this style capacitor are soldered into metallized holes in the ceramic body. The following cautions must be observed:

a. Do not allow conductors to contact the base of the capacitor.
b. When forming the leads, care shall be exercised to avoid stressing the lead to body joint connection.
c. Stress relief for the lead must be provided when mounting (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

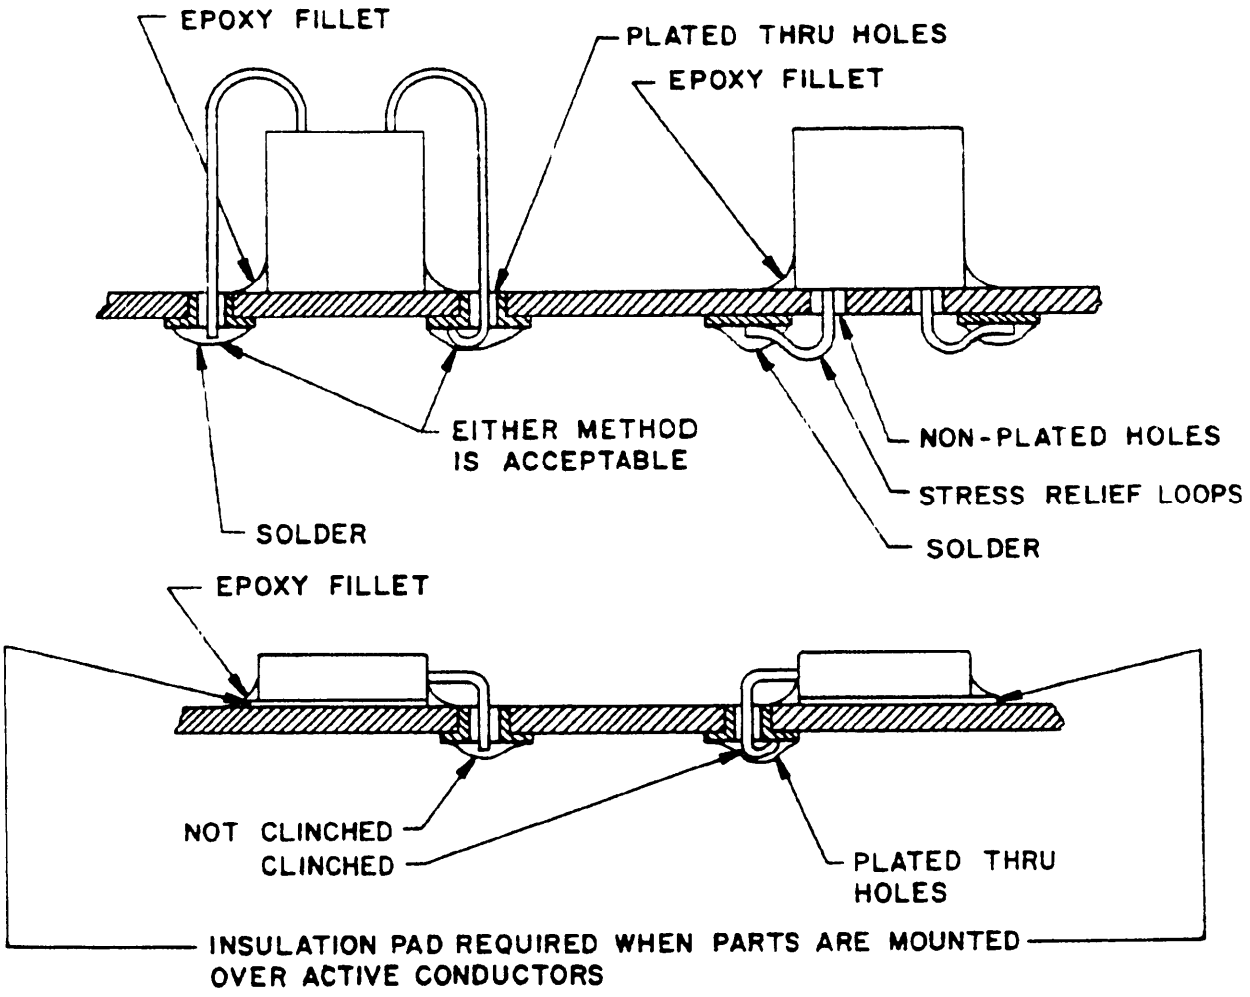


FIGURE 2. Mounting methods for stress relief.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Air Force - 19

Review activity:
DLA - ES

Preparing activity:
Air Force - 19

Agent:
DLA - ES

(Project 5910-F438)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.