NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/10A(NA)
27 August 1990
SUPERSEDING
MIL-C-123/10(NA)
13 March 1981

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, NONLEADED, STYLE CKS51

This specification sheet is approved for use by the Goddard Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

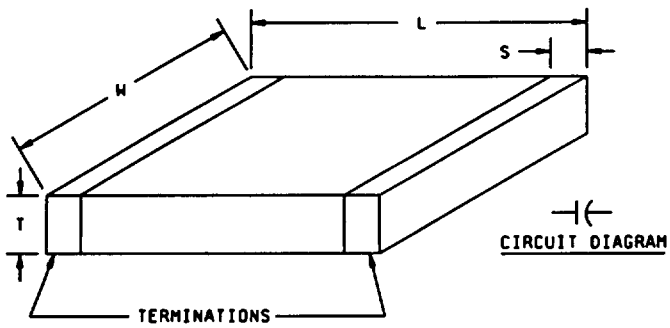

Dimensions				
L ±.015	W ±.015	T		S ±.010
		Min	Max	
.080	.050	.020	.055	.020

Inches	mm
.010	.25
.015	.38
.020	.51
.050	1.27
.055	1.40
.080	2.03

(A) NOTES:
1. Dimensions are in inches.
2. Dimensions and tolerances are for bare chips. For solder coated terminations, add .020 inch to the positive length tolerance and .015 inch to the positive width and thickness tolerances.

FIGURE 1. Style CKS51 capacitors.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Multi-layer, unencapsulated, monolithic ceramic.

Ⓐ Termination: M, R, or S.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Rated voltage: 50 volts, dc.

Marking: In accordance with MIL-C-123.

Ⓐ TABLE I. Style CKS51 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits
	pF		
M123A10BPB1R0--	1.0	CD	BP
M123A10BPB1R1--	1.1	"	"
M123A10BPB1R2--	1.2	"	"
M123A10BPB1R3--	1.3	"	"
M123A10BPB1R5--	1.5	"	"
M123A10BPB1R6--	1.6	"	"
M123A10BPB1R8--	1.8	"	"
M123A10BPB2R0--	2.0	"	"
M123A10BPB2R2--	2.2	"	"
M123A10BPB2R4--	2.4	"	"
M123A10BPB2R7--	2.7	"	"
M123A10BPB3R0--	3.0	"	"
M123A10BPB3R3--	3.3	"	"
M123A10BPB3R6--	3.6	"	"
M123A10BPB3R9--	3.9	"	"
M123A10BPB4R3--	4.3	"	"
M123A10BPB4R7--	4.7	"	"
M123A10BPB5R1--	5.1	"	"
M123A10BPB5R6--	5.6	"	"
M123A10BPB6R2--	6.2	"	"
M123A10BPB6R8--	6.8	"	"
M123A10BPB7R5--	7.5	"	"
M123A10BPB8R2--	8.2	"	"
M123A10BPB9R1--	9.1	"	"
M123A10BPB100--	10.0	CJK	"
M123A10BPB110--	11	"	"
M123A10BPB120--	12	"	"
M123A10BPB130--	13	"	"
M123A10BPB150--	15	"	"
M123A10BPB160--	16	"	"
M123A10BPB180--	18	"	"
M123A10BPB200--	20	"	"
M123A10BPB220--	22	"	"
M123A10BPB240--	24	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Style CKS51 characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits
	pF		
M123A10BPB270--	27	FJK	BP
M123A10BPB300--	30	"	"
M123A10BPB330--	33	"	"
M123A10BPB360--	36	"	"
M123A10BPB390--	39	"	"
M123A10BPB430--	43	"	"
M123A10BPB470--	47	"	"
M123A10BPB510--	51	"	"
M123A10BPB560--	56	"	"
M123A10BPB620--	62	"	"
M123A10BPB680--	68	"	"
M123A10BPB750--	75	"	"
M123A10BPB820--	82	"	"
M123A10BPB910--	91	"	"
M123A10BPB101--	100	"	"
M123A10BPB111--	110	"	"
M123A10BPB121--	120	"	"
M123A10BPB131--	130	"	"
M123A10BPB151--	150	"	"
M123A10BPB161--	160	"	"
M123A10BPB181--	180	"	"
M123A10BPB201--	200	"	"
M123A10BPB221--	220	"	"
M123A10BPB241--	240	"	"
M123A10BPB271--	270	"	"
M123A10BXB331K-	330	K	BX
M123A10BXB391K-	390	"	"
M123A10BXB471K-	470	"	"
M123A10BXB561K-	560	"	"
M123A10BXB681K-	680	"	"
M123A10BXB821K-	820	"	"
M123A10BXB102K-	1000	"	"
M123A10BXB122K-	1200	"	"
M123A10BXB152K-	1500	"	"
M123A10BXB182K-	1800	"	"
M123A10BXB222K-	2200	"	"
M123A10BXB272K-	2700	"	"
M123A10BXB332K-	3300	"	"
M123A10BXB392K-	3900	"	"
M123A10BXB472K-	4700	"	"

Ⓐ 1/ The complete Part or Identifying Number (PIN) will include additional symbol(s) to indicate capacitance tolerance and termination, as applicable. The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K444)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:12Z
Check the source to verify that this is the current version before use.