
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS05

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

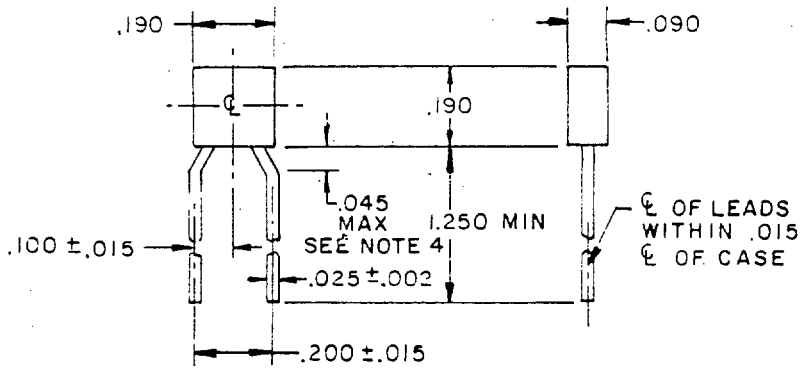

INCHES	MM	INCHES	MM
.002	.05	.100	2.54
.015	.38	.190	4.83
.025	.64	.200	5.08
.045	1.14	1.250	31.75
.090	2.29		



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).
4. For flush mounting .078 (1.98 mm) printed-circuit-hole diameter is required to clear shoulder.

FIGURE 1. Style CKS05 capacitors.

Ⓐ denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A01BPC4R7-C	4.7	CD	BP	100
M123A01BPC5R1-C	5.1			
M123A01BPC5R6-C	5.6			
M123A01BPC6R2-C	6.2			
M123A01BPC6R8-C	6.8			
M123A01BPC7R5-C	7.5			
M123A01BPC8R2-C	8.2			
M123A01BPC9R1-C	9.1			
M123A01BPC100-C	10	CJK		
M123A01BPC110-C	11			
M123A01BPC120-C	12			
M123A01BPC130-C	13			
M123A01BPC150-C	15			
M123A01BPC160-C	16			
M123A01BPC180-C	18			
M123A01BPC200-C	20			
M123A01BPC220-C	22			
M123A01BPC240-C	24			
M123A01BPC270-C	27	FJK		
M123A01BPC300-C	30			
M123A01BPC330-C	33			
M123A01BPC360-C	36			
M123A01BPC390-C	39			
M123A01BPC430-C	43			
M123A01BPC470-C	47			
M123A01BPC510-C	51			
M123A01BPC560-C	56			
M123A01BPC620-C	62			
M123A01BPC680-C	68			
M123A01BPC750-C	75			
M123A01BPC820-C	82			
M123A01BPC910-C	91			
M123A01BPC101-C	100			
M123A01BPC111-C	110			
M123A01BPC121-C	120			
M123A01BPC131-C	130			
M123A01BPC151-C	150			
M123A01BPC161-C	160			
M123A01BPC181-C	180			
M123A01BPC201-C	200			
M123A01BPC221-C	220			
M123A01BPC241-C	240			
M123A01BPB271-C	270			50
M123A01BPB301-C	300			
M123A01BPB331-C	330			
M123A01BPB361-C	360			
M123A01BPB391-C	390			
M123A01BPB431-C	430			
M123A01BPB471-C	470			
(A) M123A01BPB511-C	510			
M123A01BPB561-C	560			
M123A01BPB621-C	620			
M123A01BPB681-C	680			
M123A01BPB751-C	750			
M123A01BPB821-C	820			
M123A01BPB911-C	910			
M123A01BPB102-C	1000			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05 characteristics - Continued.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A01BPB112-C	1100	FJK	BP	50
M123A01BPB122-C	1200			
M123A01BPB132-C	1300			
M123A01BPB152-C	1500			
M123A01BPB162-C	1600			
M123A01BPB182-C	1800			
M123A01BPB202-C	2000			
M123A01BPB222-C	2200			
M123A01BPB242-C	2400			
M123A01BPB272-C	2700			
M123A01BXC271KS	270	K	BX	100
M123A01BXC331KS	330			
M123A01BXC391KS	390			
M123A01BXC471KS	470			
M123A01BXC561KS	560			
M123A01BXC681KS	680			
M123A01BXC821KS	820			
M123A01BXC102KS	1000			
M123A01BXC122KS	1200			
M123A01BXC152KS	1500			
M123A01BXC182KS	1800			
M123A01BXC222KS	2200			
M123A01BXC272KS	2700			
M123A01BXC332KS	3300			
M123A01BXC392KS	3900			
M123A01BXC472KS	4700			
M123A01BXB562KS	5600			50
M123A01BXB682KS	6800			
M123A01BXB822KS	8200			
M123A01BXB103KS	10000			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C4 or C5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5910-1417-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.