INCH-POUND

MIL-PRF-123/1B
28 September 1994
SUPERSEDING
MIL-C-123/1A
10 August 1982


NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS05

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

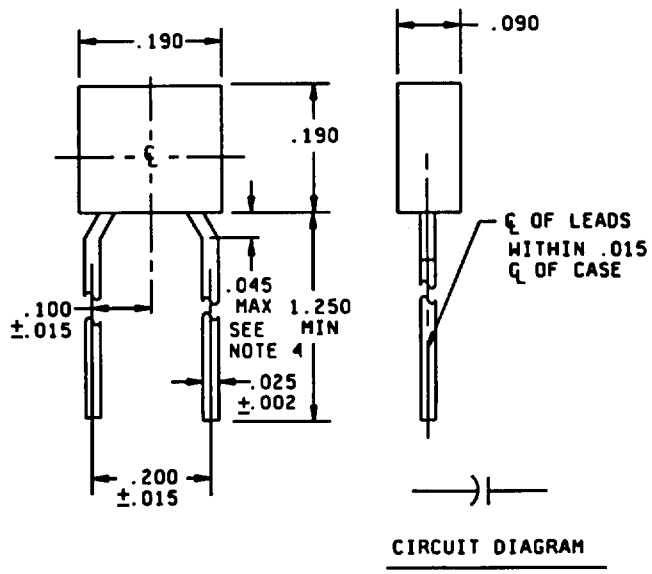

Inches	mm	Inches	mm
.002	0.05	.100	2.54
.015	0.38	.190	4.83
.025	0.64	.200	5.08
.045	1.14	1.250	31.75
.090	2.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).
4. For flush mounting .078 (1.98 mm) printed-circuit-hole diameter is required to clear shoulder.

FIGURE 1. Style CKS05 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A01BPC4R7-C	4.7	CD	BP	100
M123A01BPC5R1-C	5.1	"	"	"
M123A01BPC5R6-C	5.6	"	"	"
M123A01BPC6R2-C	6.2	"	"	"
M123A01BPC6R8-C	6.8	"	"	"
M123A01BPC7R5-C	7.5	"	"	"
M123A01BPC8R2-C	8.2	"	"	"
M123A01BPC9R1-C	9.1	"	"	"
M123A01BPC100-C	10	CJK	"	"
M123A01BPC110-C	11	"	"	"
M123A01BPC120-C	12	"	"	"
M123A01BPC130-C	13	"	"	"
M123A01BPC150-C	15	"	"	"
M123A01BPC160-C	16	"	"	"
M123A01BPC180-C	18	"	"	"
M123A01BPC200-C	20	"	"	"
M123A01BPC220-C	22	"	"	"
M123A01BPC240-C	24	"	"	"
M123A01BPC270-C	27	FJK	"	"
M123A01BPC300-C	30	"	"	"
M123A01BPC330-C	33	"	"	"
M123A01BPC360-C	36	"	"	"
M123A01BPC390-C	39	"	"	"
M123A01BPC430-C	43	"	"	"
M123A01BPC470-C	47	"	"	"
M123A01BPC510-C	51	"	"	"
M123A01BPC560-C	56	"	"	"
M123A01BPC620-C	62	"	"	"
M123A01BPC680-C	68	"	"	"
M123A01BPC750-C	75	"	"	"
M123A01BPC820-C	82	"	"	"
M123A01RPC910-C	91	"	"	"
M123A01BPC101-C	100	"	"	"
M123A01BPC111-C	110	"	"	"
M123A01BPC121-C	120	"	"	"
M123A01BPC131-C	130	"	"	"
M123A01BPC151-C	150	"	"	"
M123A01BPC161-C	160	"	"	"
M123A01BPC181-C	180	"	"	"
M123A01BPC201-C	200	"	"	"
M123A01BPC221-C	220	"	"	"
M123A01BPC241-C	240	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS05 characteristics - Continued.

PIN 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
M123A01BPB271-C	270	FJK	BP	50
M123A01BPB301-C	300	"	"	"
M123A01BPB331-C	330	"	"	"
M123A01BPB361-C	360	"	"	"
M123A01BPB391-C	390	"	"	"
M123A01BPB431-C	430	"	"	"
M123A01BPB471-C	470	"	"	"
M123A01BPB511-C	510	"	"	"
M123A01BPB561-C	560	"	"	"
M123A01BPB621-C	620	"	"	"
M123A01BPB681-C	680	"	"	"
M123A01BPB751-C	750	"	"	"
M123A01BPB821-C	820	"	"	"
M123A01BPB911-C	910	"	"	"
M123A01BPB102-C	1000	"	"	"
M123A01BPB112-C	1100	"	"	"
M123A01BPB122-C	1200	"	"	"
M123A01BPB132-C	1300	"	"	"
M123A01BPB152-C	1500	"	"	"
M123A01BPB162-C	1600	"	"	"
M123A01BPB182-C	1800	"	"	"
M123A01BPB202-C	2000	"	"	"
M123A01BPB222-C	2200	"	"	"
M123A01BPB242-C	2400	"	"	"
M123A01BPB272-C	2700	"	"	"
M123A01BXC271KC	270	K	BX	100
M123A01BXC331KC	330	"	"	"
M123A01BXC391KC	390	"	"	"
M123A01BXC471KC	470	"	"	"
M123A01BXC561KC	560	"	"	"
M123A01BXC681KC	680	"	"	"
M123A01BXC821KC	820	"	"	"
M123A01BXC102KC	1000	"	"	"
M123A01BXC122KC	1200	"	"	"
M123A01BXC152KC	1500	"	"	"
M123A01BXC182KC	1800	"	"	"
M123A01BXC222KC	2200	"	"	"
M123A01BXC272KC	2700	"	"	"
M123A01BXC332KC	3300	"	"	"
M123A01BXC392KC	3900	"	"	"
M123A01BXC472KC	4700	"	"	"
M123A01BXB562KC	5600	K	BX	50
M123A01BXB682KC	6800	"	"	"
M123A01BXB822KC	8200	"	"	"
M123A01BXB103KC	10000	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

(B) Lead wire: Termination C in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 1.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1891-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.