
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS06

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

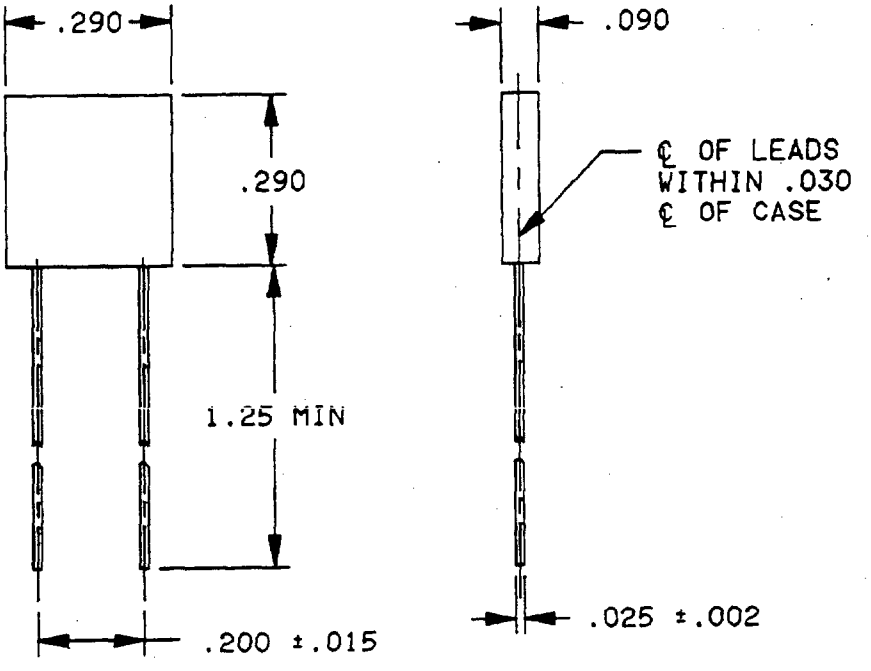

CIRCUIT DIAGRAM

Inches	mm
.002	0.05
.015	0.38
.025	0.64
.030	0.76
.090	2.29
.200	5.08
.290	7.37
1.25	31.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).

FIGURE 1. Style CKS06 capacitors.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS06 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A02BPC271-C	270	FJK	BP	100
M123A02BPC301-C	300	"	"	"
M123A02BPC331-C	330	"	"	"
M123A02BPC361-C	360	"	"	"
M123A02BPC391-C	390	"	"	"
M123A02BPC431-C	430	"	"	"
M123A02BPC471-C	470	"	"	"
M123A02BPC511-C	510	"	"	"
M123A02BPC561-C	560	"	"	"
M123A02BPC621-C	620	"	"	"
M123A02BPC681-C	680	"	"	"
M123A02BPC751-C	750	"	"	"
M123A02BPC821-C	820	"	"	"
M123A02BPC911-C	910	"	"	"
M123A02BPC102-C	1000	"	"	"
M123A02BPC112-C	1100	"	"	"
M123A02BPC122-C	1200	"	"	"
M123A02BPC132-C	1300	"	"	"
M123A02BPC152-C	1500	"	"	"
M123A02BPC162-C	1600	"	"	"
M123A02BPC182-C	1800	"	"	"
M123A02BPC202-C	2000	"	"	"
M123A02BPC222-C	2200	"	"	"
M123A02BPC242-C	2400	"	"	"
M123A02BPB272-C	2700	"	"	50
M123A02BPB302-C	3000	"	"	"
M123A02BPB332-C	3300	"	"	"
M123A02BPB362-C	3600	"	"	"
M123A02BPB392-C	3900	"	"	"
M123A02BPB432-C	4300	"	"	"
M123A02BPB472-C	4700	"	"	"
M123A02BXC562KC	5600	K	BX	100
M123A02BXC682KC	6800	"	"	"
M123A02BXC822KC	8200	"	"	"
M123A02BXC103KC	10000	"	"	"
M123A02BXC123KC	12000	"	"	"
M123A02BXC153KC	15000	"	"	"
M123A02BXC183KC	18000	"	"	"
M123A02BXC223KC	22000	"	"	"
M123A02BXC273KC	27000	"	"	"
M123A02BXC333KC	33000	"	"	"
M123A02BXC393KC	39000	"	"	"
M123A02BXC473KC	47000	"	"	"
M123A02BXC563KC	56000	"	"	"
M123A02BXC683KC	68000	"	"	"
M123A02BXC823KC	82000	"	"	"
(B) M123A02BXC104KC	100000	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS06 characteristics - Continued

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A02BXB563KC	56000	K	BX	50
M123A02BXB683KC	68000	"	"	"
M123A02BXB823KC	82000	"	"	"
M123A02BXB104KC	100000	"	"	"
M123A02BXB124KC	120000	"	"	"
M123A02BXB154KC	150000	"	"	"
M123A02BXB184KC	180000	"	"	"
M123A02BXB224KC	220000	"	"	"
M123A02BXB274KC	270000	"	"	"
M123A02BXB334KC	330000	"	"	"
M123A02BXB394KC	390000	"	"	"
(B) M123A02BXB474KC	470000	"	"	"

1/ The complete part number will include a symbol to indicate capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C4 or C5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 2.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1583)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.