

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS07

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

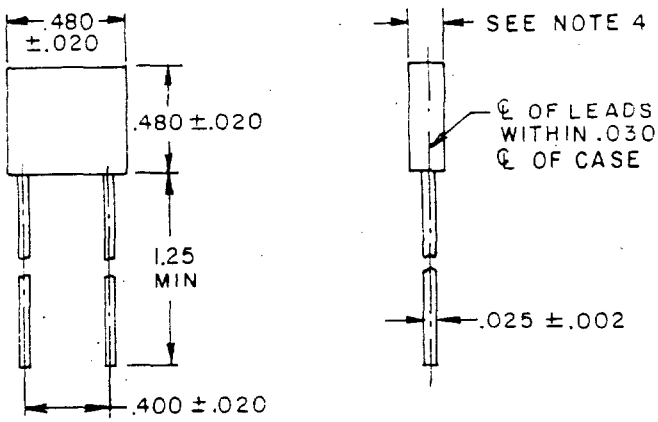



CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.002	.05	.140	3.56
.010	.25	.200	5.08
.020	.51	.400	10.16
.025	.64	.480	12.19
.030	.76	1.25	31.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).
4. Thickness shall be .200 maximum for 100,000 pF capacitors and .140 for all others.

FIGURE 1. Style CKS07 capacitors.

Ⓐ denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS07 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A03BPC272-C	2700	FJK	BP	100
M123A03BPC302-C	3000			
M123A03BPC332-C	3300			
M123A03BPC362-C	3600			
M123A03BPC392-C	3900			
M123A03BPC432-C	4300			
M123A03BPC472-C	4700			
M123A03BPC512-C	5100			
M123A03BPC562-C	5600			
M123A03BPC622-C	6200			
M123A03BPC682-C	6800			
M123A03BPC752-C	7500			
M123A03BPC822-C	8200			
M123A03BPC912-C	9100			
M123A03BPC103-C	10000			
M123A03BPB113-C	11000			50
M123A03BPB123-C	12000			
M123A03BPB133-C	13000			
M123A03BPB153-C	15000			
M123A03BPB163-C	16000			
M123A03BPB183-C	18000			
M123A03BPB203-C	20000			
M123A03BPB223-C	22000			
(A) M123A03BPB243-C	24000			
M123A03BPB273-C	27000			
M123A03BPB303-C	30000			
M123A03BPB333-C	33000			
M123A03BPB363-C	36000			
M123A03BPB393-C	39000			
M123A03BPB433-C	43000			
M123A03BPB473-C	47000			
M123A03BPB513-C	51000			
M123A03BPB563-C	56000			
M123A03BPB623-C	62000			
M123A03BPB683-C	68000			
M123A03BPB753-C	75000			
M123A03BPB823-C	82000			
M123A03BPB913-C	91000			
M123A03BPB104-C	100000			
M123A03BXC563KC	56000	K	BX	100
M123A03BXC683KC	68000			
M123A03BXC823KC	82000			
M123A03BXC104KC	100000			
M123A03BXC124KC	120000			
M123A03BXC154KC	150000			
M123A03BXC184KC	180000			
M123A03BXC224KC	220000			
M123A03BXC274KC	270000			
M123A03BXC334KC	330000			
M123A03BXC394KC	390000			
M123A03BXC474KC	470000			
M123A03BXB564KC	560000			50
M123A03BXB684KC	680000			
M123A03BXB824KC	820000			
M123A03BXB105KC	1000000			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C4 or C5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 2.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5910-1417-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.