NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-123/3C
20 July 1988
SUPERSEDING
MIL-C-123/3B
17 March 1988

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

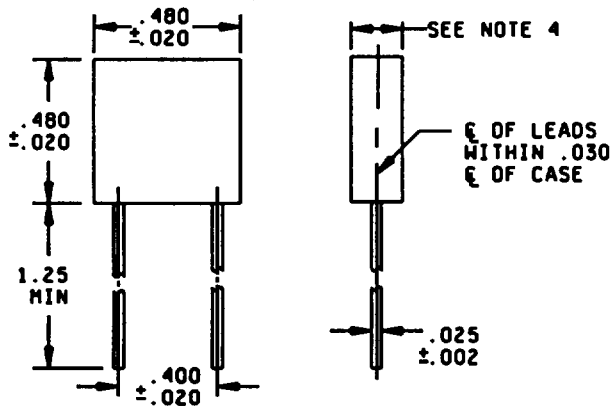

CIRCUIT DIAGRAM

Inches	mm	Inches	mm
.002	0.05	.400	10.16
.020	0.51	.480	12.19
.025	0.64	1.250	31.8
.030	0.76		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).
4. Thickness shall be .200 (5.08 mm) maximum for capacitance values of 82,000, 91,000, and 100,000 pF in BP dielectric, and .140 (3.56 mm) ±.010 (0.25 mm) for all others.

FIGURE 1. Style CKS07 capacitors.

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS07 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A03BPC272-C	2700	FJK	BP	100
M123A03BPC302-C	3000	"	"	"
M123A03BPC332-C	3300	"	"	"
M123A03BPC362-C	3600	"	"	"
M123A03BPC392-C	3900	"	"	"
M123A03BPC432-C	4300	"	"	"
M123A03BPC472-C	4700	"	"	"
M123A03BPC512-C	5100	"	"	"
M123A03BPC562-C	5600	"	"	"
M123A03BPC622-C	6200	"	"	"
M123A03BPC682-C	6800	"	"	"
M123A03BPC752-C	7500	"	"	"
M123A03BPC822-C	8200	"	"	"
M123A03BPC912-C	9100	"	"	"
M123A03BPC103-C	10000	"	"	"
M123A03BPB113-C	11000	"	"	50
M123A03BPB123-C	12000	"	"	"
M123A03BPB133-C	13000	"	"	"
M123A03BPB153-C	15000	"	"	"
M123A03BPB163-C	16000	"	"	"
M123A03BPB183-C	18000	"	"	"
M123A03BPB203-C	20000	"	"	"
M123A03BPB223-C	22000	"	"	"
M123A03BPB243-C	24000	"	"	"
M123A03BPB273-C	27000	"	"	"
M123A03BPB303-C	30000	"	"	"
M123A03BPB333-C	33000	"	"	"
M123A03BPB363-C	36000	"	"	"
M123A03BPB393-C	39000	"	"	"
M123A03BPB433-C	43000	"	"	"
M123A03BPB473-C	47000	"	"	"
M123A03BPB513-C	51000	"	"	"
M123A03BPB563-C	56000	"	"	"
M123A03BPB623-C	62000	"	"	"
M123A03BPB683-C	68000	"	"	"
M123A03BPB753-C	75000	"	"	"
M123A03BPB823-C	82000	"	"	"
M123A03BPB913-C	91000	"	"	"
M123A03BPB104-C	100000	"	"	"
M123A03BXC563KC	56000	K	BX	100
M123A03BXC683KC	68000	"	"	"
M123A03BXC823KC	82000	"	"	"
M123A03BXC104KC	100000	"	"	"
M123A03BXC124KC	120000	"	"	"
M123A03BXC154KC	150000	"	"	"
M123A03BXC184KC	180000	"	"	"
M123A03BXC224KC	220000	"	"	"
M123A03BXC274KC	270000	"	"	"
M123A03BXC334KC	330000	"	"	"
M123A03BXC394KC	390000	"	"	"
M123A03BXC474KC	470000	"	"	"
M123A03BXB564KC	560000	"	"	50
M123A03BXB684KC	680000	"	"	"
M123A03BXB824KC	820000	"	"	"
M123A03BXB105KC	1000000	"	"	"

1/ The complete part number will include a symbol to indicate capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preform.

Lead wire: Type C32 or C51 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 2.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1633)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.