INCH-POUND

MIL-PRF-123/3D
18 June 2001
SUPERSEDING
MIL-PRF-123/3C
20 July 1988

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-123.

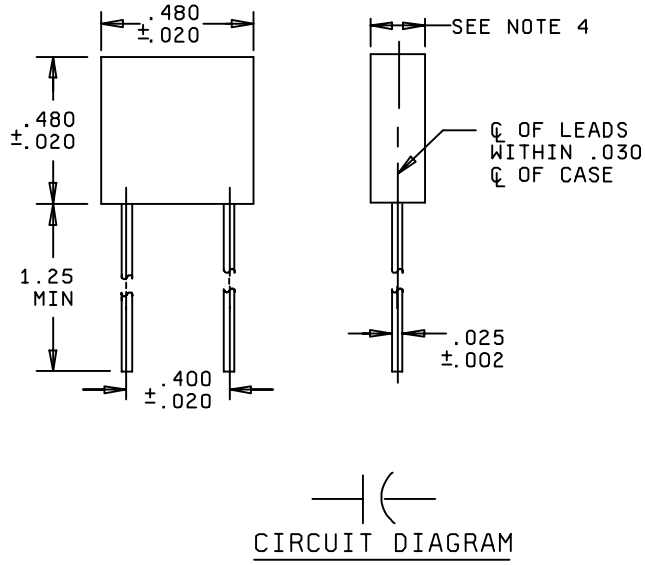

Inches	mm
.002	0.05
.020	0.51
.025	0.64
.030	0.76
.400	10.16
.480	12.19
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).
4. Thickness shall be .200 (5.08 mm) maximum for capacitance values of 82,000, 91,000, and 100,000 pF in BP dielectric; and .140 (3.56 mm) ± .010 (0.25 mm) for all others.

FIGURE 1. Style CKS07 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: See figure 1.

Case type: Molded or preformed.

Lead wire: Type C32 or C51 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-PRF-123, example 2.

TABLE I. Style CKS07 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts)
M123A03BPC272-C	2,700	F, J, K	BP	100
M123A03BPC302-C	3,000	F, J, K	BP	100
M123A03BPC332-C	3,300	F, J, K	BP	100
M123A03BPC362-C	3,600	F, J, K	BP	100
M123A03BPC392-C	3,900	F, J, K	BP	100
M123A03BPC432-C	4,300	F, J, K	BP	100
M123A03BPC472-C	4,700	F, J, K	BP	100
M123A03BPC512-C	5,100	F, J, K	BP	100
M123A03BPC562-C	5,600	F, J, K	BP	100
M123A03BPC622-C	6,200	F, J, K	BP	100
M123A03BPC682-C	6,800	F, J, K	BP	100
M123A03BPC752-C	7,500	F, J, K	BP	100
M123A03BPC822-C	8,200	F, J, K	BP	100
M123A03BPC912-C	9,100	F, J, K	BP	100
M123A03BPC103-C	10,000	F, J, K	BP	100
M123A03BPB113-C	11,000	F, J, K	BP	50
M123A03BPB123-C	12,000	F, J, K	BP	50
M123A03BPB133-C	13,000	F, J, K	BP	50
M123A03BPB153-C	15,000	F, J, K	BP	50
M123A03BPB163-C	16,000	F, J, K	BP	50
M123A03BPB183-C	18,000	F, J, K	BP	50
M123A03BPB203-C	20,000	F, J, K	BP	50
M123A03BPB223-C	22,000	F, J, K	BP	50
M123A03BPB243-C	24,000	F, J, K	BP	50
M123A03BPB273-C	27,000	F, J, K	BP	50
M123A03BPB303-C	30,000	F, J, K	BP	50
M123A03BPB333-C	33,000	F, J, K	BP	50
M123A03BPB363-C	36,000	F, J, K	BP	50
M123A03BPB393-C	39,000	F, J, K	BP	50
M123A03BPB433-C	43,000	F, J, K	BP	50
M123A03BPB473-C	47,000	F, J, K	BP	50
M123A03BPB513-C	51,000	F, J, K	BP	50
M123A03BPB563-C	56,000	F, J, K	BP	50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS07 characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts)
M123A03BPB623-C	62,000	F, J, K	BP	50
M123A03BPB683-C	68,000	F, J, K	BP	50
M123A03BPB753-C	75,000	F, J, K	BP	50
M123A03BPB823-C	82,000	F, J, K	BP	50
M123A03BPB913-C	91,000	F, J, K	BP	50
M123A03BPB104-C	100,000	F, J, K	BP	50
M123A03BXC563KC	56,000	K	BX	100
M123A03BXC683KC	68,000	K	BX	100
M123A03BXC823KC	82,000	K	BX	100
M123A03BXC104KC	100,000	K	BX	100
M123A03BXC124KC	120,000	K	BX	100
M123A03BXC154KC	150,000	K	BX	100
M123A03BXC184KC	180,000	K	BX	100
M123A03BXC224KC	220,000	K	BX	100
M123A03BXC274KC	270,000	K	BX	100
M123A03BXC334KC	330,000	K	BX	100
M123A03BXC394KC	390,000	K	BX	100
M123A03BXC474KC	470,000	K	BX	100
M123A03BXB564KC	560,000	K	BX	50
M123A03BXB684KC	680,000	K	BX	50
M123A03BXB824KC	820,000	K	BX	50
M123A03BXB105KC	1,000,000	K	BX	50

1/ Complete PIN shall include an additional letter to indicate capacitance tolerance, if applicable.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Review activities:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-2127-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.