
INCH-POUND
MIL-PRF-123/3H
16 August 2024
SUPERSEDING
MIL-PRF-123/3G
30 June 2019

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS07

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-123.

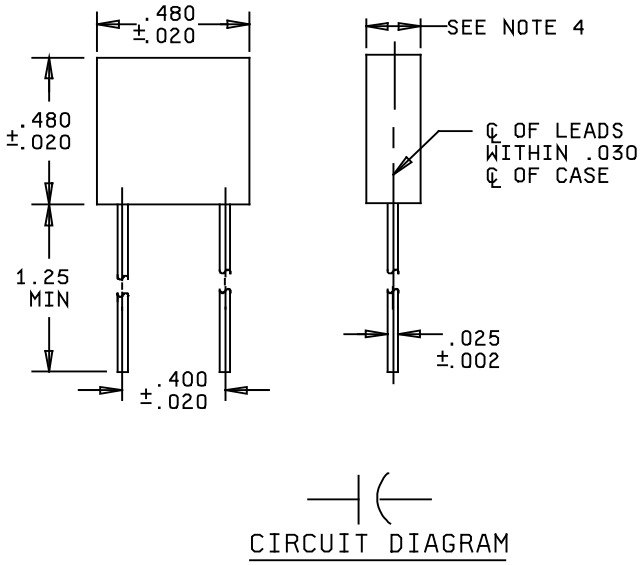

Inches	mm
.002	0.05
.020	0.51
.025	0.64
.030	0.76
.400	10.16
.480	12.19
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information.
3. Unless otherwise specified, tolerance is ± .010 (0.25 mm).
4. Thickness shall be .240 inch (6.10 mm) ± .010 inch (0.25 mm) for 100 Vdc capacitance values of 15,000 and 18,000 pF in BP dielectric; .200 inch (5.08 mm) maximum for capacitance values of 82,000, 91,000, and 100,000 pF in BP dielectric; and .140 inch (3.56 mm) ± .010 (0.25 mm) for all others.

FIGURE 1. Style CKS07 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preformed.

Lead wire: Termination C in accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I (F = ± 1 percent; J = ± 5 percent; K = ± 10 percent).

Voltage-temperature limit: BP and BX in accordance with MIL-PRF-123.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I (B = 50 Vdc; C = 100 Vdc; D = 200 Vdc).

Marking: In accordance with MIL-PRF-123, example 2.

TABLE I. Style CKS07 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A03BPD222-C	2,200	F, J, K	BP	200
M123A03BP-272-C	2,700	F, J, K	BP	100, 200
M123A03BP-302-C	3,000	F, J, K	BP	100, 200
M123A03BP-332-C	3,300	F, J, K	BP	100, 200
M123A03BP-362-C	3,600	F, J, K	BP	100, 200
M123A03BP-392-C	3,900	F, J, K	BP	100, 200
M123A03BP-432-C	4,300	F, J, K	BP	100, 200
M123A03BP-472-C	4,700	F, J, K	BP	100, 200
M123A03BPC512-C	5,100	F, J, K	BP	100
M123A03BPC562-C	5,600	F, J, K	BP	100
M123A03BPC622-C	6,200	F, J, K	BP	100
M123A03BPC682-C	6,800	F, J, K	BP	100
M123A03BPC752-C	7,500	F, J, K	BP	100
M123A03BPC822-C	8,200	F, J, K	BP	100
M123A03BPC912-C	9,100	F, J, K	BP	100
M123A03BPC103-C	10,000	F, J, K	BP	100
M123A03BP-113-C	11,000	F, J, K	BP	50, 100
M123A03BP-123-C	12,000	F, J, K	BP	50, 100
M123A03BPB133-C	13,000	F, J, K	BP	50
M123A03BP-153-C	15,000	F, J, K	BP	50, 100
M123A03BPB163-C	16,000	F, J, K	BP	50
M123A03BP-183-C	18,000	F, J, K	BP	50, 100
M123A03BPB203-C	20,000	F, J, K	BP	50
M123A03BPB223-C	22,000	F, J, K	BP	50
M123A03BPB243-C	24,000	F, J, K	BP	50
M123A03BPB273-C	27,000	F, J, K	BP	50
M123A03BPB303-C	30,000	F, J, K	BP	50
M123A03BPB333-C	33,000	F, J, K	BP	50
M123A03BPB363-C	36,000	F, J, K	BP	50
M123A03BPB393-C	39,000	F, J, K	BP	50
M123A03BPB433-C	43,000	F, J, K	BP	50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS07 characteristics - Continued.

PIN 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A03BPB473-C	47,000	F, J, K	BP	50
M123A03BPB513-C	51,000	F, J, K	BP	50
M123A03BPB563-C	56,000	F, J, K	BP	50
M123A03BPB623-C	62,000	F, J, K	BP	50
M123A03BPB683-C	68,000	F, J, K	BP	50
M123A03BPB753-C	75,000	F, J, K	BP	50
M123A03BPB823-C	82,000	F, J, K	BP	50
M123A03BPB913-C	91,000	F, J, K	BP	50
M123A03BPB104-C	100,000	F, J, K	BP	50
M123A03BXC563KC	56,000	K	BX	100
M123A03BXC683KC	68,000	K	BX	100
M123A03BXC823KC	82,000	K	BX	100
M123A03BXC104KC	100,000	K	BX	100
M123A03BXC124KC	120,000	K	BX	100
M123A03BXC154KC	150,000	K	BX	100
M123A03BXC184KC	180,000	K	BX	100
M123A03BXC224KC	220,000	K	BX	100
M123A03BXC274KC	270,000	K	BX	100
M123A03BXC334KC	330,000	K	BX	100
M123A03BXC394KC	390,000	K	BX	100
M123A03BXC474KC	470,000	K	BX	100
M123A03BXB564KC	560,000	K	BX	50
M123A03BXB684KC	680,000	K	BX	50
M123A03BXB824KC	820,000	K	BX	50
M123A03BXB105KC	1,000,000	K	BX	50

1/ Complete PIN shall include an additional letter to indicate voltage and capacitance tolerance, if applicable.

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
Other - NA

Preparing activity:
DLA - CC

(Project 5910-2024-034)

Review activities:
Air Force – 85

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:09Z
Check the source to verify that this is the current version before use.