

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS11

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

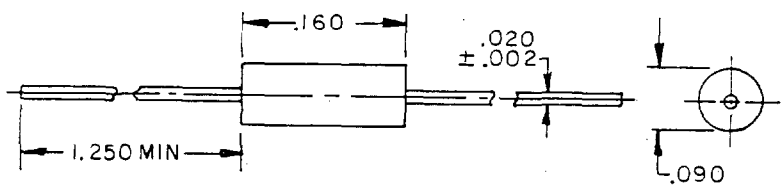



CIRCUIT DIAGRAM

INCHES	MM
.002	.05
.020	.51
.090	2.29
.160	4.06
1.25	31.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).

FIGURE 1. Style CKS11 capacitors.

Ⓐ denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A04BPC4R7-W	4.7	CD	BP	100
M123A04BPC5R1-W	5.1			
M123A04BPC6R2-W	6.2			
M123A04BPC6R8-W	6.8			
M123A04BPC7R5-W	7.5			
M123A04BPC8R2-W	8.2			
M123A04BPC9R1-W	9.1			
M123A04BPC100-W	10	CJK		
M123A04BPC110-W	11			
M123A04BPC120-W	12			
M123A04BPC130-W	13			
M123A04BPC150-W	15			
M123A04BPC160-W	16			
M123A04BPC180-W	18			
M123A04BPC200-W	20			
M123A04BPC220-W	22			
M123A04BPC240-W	24			
M123A04BPC270-W	27			
M123A04BPC300-W	30			
M123A04BPC330-W	33			
M123A04BPC360-W	36			
M123A04BPC390-W	39			
M123A04BPC430-W	43			
M123A04BPC470-W	47			
M123A04BPC510-W	51			
M123A04BPC560-W	56			
M123A04BPC620-W	62			
M123A04BPC680-W	68			
M123A04BPC750-W	75			
M123A04BPC820-W	82			
M123A04BPC910-W	91			
M123A04BPC101-W	100			
M123A04BPB111-W	110	FJK		50
M123A04BPB121-W	120			
M123A04BPB131-W	130			
M123A04BPB151-W	150			
M123A04BPB161-W	160			
M123A04BPB181-W	180			
M123A04BPB201-W	200			
M123A04BPB221-W	220			
(A) M123A04BPB241-W	240			
M123A04BPB271-W	270			
M123A04BPB301-W	300			
M123A04BPB331-W	330			
M123A04BPB361-W	360			
M123A04BPB391-W	390			
M123A04BPB431-W	430			
M123A04BPB471-W	470			
M123A04BPB511-W	510			
M123A04BPB561-W	560			

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics - Continued.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A04BXC101KW	100	K	BX	100
M123A04BXC121KW	120			
M123A04BXC151KW	150			
M123A04BXC181KW	180			
M123A04BXC221KW	220			
M123A04BXC271KW	270			
M123A04BXC331KW	330			
M123A04BXC391KW	390			
M123A04BXC471KW	470			
M123A04BXC561KW	560			
M123A04BXC681KW	680			
M123A04BXC821KW	820			
M123A04BXC102KW	1000			
M123A04BXB122KW	1200			50
M123A04BXB152KW	1500			
M123A04BXB182KW	1800			
M123A04BXB222KW	2200			
M123A04BXB272KW	2700			
M123A04BXB332KW	3300			
M123A04BXB329KW	3900			
M123A04BXB472KW	4700			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

Lead wire: Type W4 or W5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 3.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5910-1417-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.