NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/4B
28 September 1994
SUPERSEDING
MIL-C-123/4A
10 August 1982

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS11

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

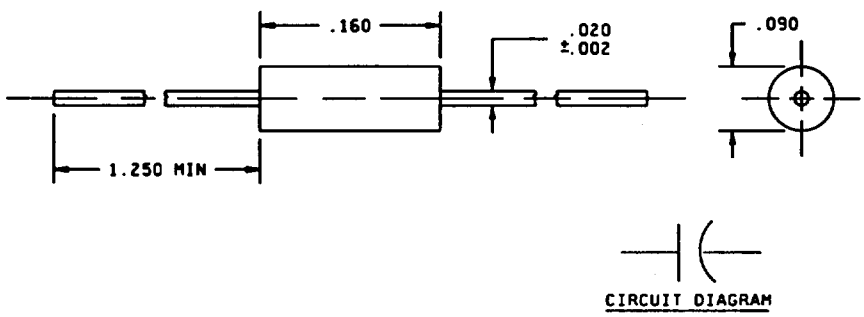

Inches	mm
.002	0.05
.020	0.51
.090	2.29
.160	4.06
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).

FIGURE 1. Style CKS11 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pf			volts
M123A04BPC4R7-W	4.7	CD	BP	100
M123A04BPC5R1-W	5.1	"	"	"
M123A04BPC6R2-W	6.2	"	"	"
M123A04BPC6R8-W	6.8	"	"	"
M123A04BPC7R5-W	7.5	"	"	"
M123A04BPC8R2-W	8.2	"	"	"
M123A04BPC9R1-W	9.1	"	"	"
M123A04BPC100-W	10	CJK	"	"
M123A04BPC110-W	11	"	"	"
M123A04BPC120-W	12	"	"	"
M123A04BPC130-W	13	"	"	"
M123A04BPC150-W	15	"	"	"
M123A04BPC160-W	16	"	"	"
M123A04BPC180-W	18	"	"	"
M123A04BPC200-W	20	"	"	"
M123A04BPC220-W	22	"	"	"
M123A04BPC240-W	24	"	"	"
M123A04BPC270-W	27	FJK	"	"
M123A04BPC300-W	30	"	"	"
M123A04BPC330-W	33	"	"	"
M123A04BPC360-W	36	"	"	"
M123A04BPC390-W	39	"	"	"
M123A04BPC430-W	43	"	"	"
M123A04BPC470-W	47	"	"	"
M123A04BPC510-W	51	"	"	"
M123A04BPC560-W	56	"	"	"
M123A04BPC620-W	62	"	"	"
M123A04BPC680-W	68	"	"	"
M123A04BPC750-W	75	"	"	"
M123A04BPC820-W	82	"	"	"
M123A04BPC910-W	91	"	"	"
M123A04BPC101-W	100	"	"	"
M123A04BPB111-W	110	"	"	50
M123A04BPB121-W	120	"	"	"
M123A04BPB131-W	130	"	"	"
M123A04BPB151-W	150	"	"	"
M123A04BPB161-W	160	"	"	"
M123A04BPB181-W	180	"	"	"
M123A04BPB201-W	200	"	"	"
M123A04BPB221-W	220	"	"	"
M123A04BPB241-W	240	"	"	"
M123A04BPB271-W	270	"	"	"
M123A04BPB301-W	300	"	"	"
M123A04BPB331-W	330	"	"	"
M123A04BPB361-W	360	"	"	"
M123A04BPB391-W	390	"	"	"
M123A04BPB431-W	430	"	"	"
M123A04BPB471-W	470	"	"	"
M123A04BPB511-W	510	"	"	"
M123A04BPB561-W	560	"	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics - Continued.

PIN 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A04BXC101KW	100	K	BX	100
M123A04BXC121KW	120	"	"	"
M123A04BXC151KW	150	"	"	"
M123A04BXC181KW	180	"	"	"
M123A04BXC221KW	220	"	"	"
M123A04BXC271KW	270	"	"	"
M123A04BXC331KW	330	"	"	"
M123A04BXC391KW	390	"	"	"
M123A04BXC471KW	470	"	"	"
M123A04BXC561KW	560	"	"	"
M123A04BXC681KW	680	"	"	"
M123A04BXC821KW	820	"	"	"
M123A04BXC102KW	1000	"	"	"
M123A04BXB122KW	1200	"	"	50
M123A04BXB152KW	1500	"	"	"
M123A04BXB182KW	1800	"	"	"
M123A04BXB222KW	2200	"	"	"
M123A04BXB272KW	2700	"	"	"
M123A04BXB332KW	3300	"	"	"
M123A04BXB392KW	3900	"	"	"
M123A04BXB472KW	4700	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

(B) Lead wire: Termination W in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 3.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1891-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.