
INCH-POUND
MIL-PRF-123/4E
21 April 2014
SUPERSEDING
MIL-PRF-123/4D
28 September 2007

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS11

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-123.

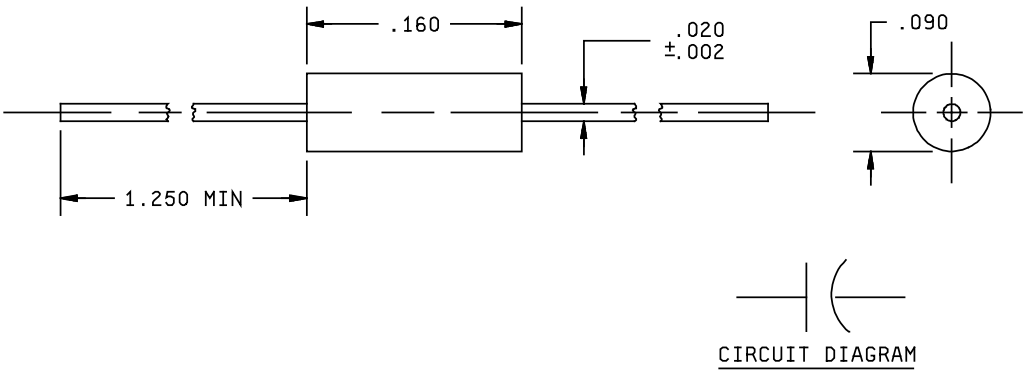


| Inches | mm |
|---|---|
| .002 | 0.05 |
| .020 | 0.51 |
| .090 | 2.29 |
| .160 | 4.06 |
| 1.250 | 31.75 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).

FIGURE 1. Style CKS11 capacitors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded, or preformed plastic encapsulated.

Lead wire: Termination W in accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I (B = ±0.1 pF; C = ±0.25 pF; D = ±0.5 pF; F = ±1 percent; J = ±5 percent; K = ±10 percent).

Operating temperature: -55°C to +125°C.

Voltage rating: See table I (B = 50 Vdc; C = 100 Vdc; D = 200 Vdc).

Marking: In accordance with MIL-PRF-123, example 3.

TABLE I. Style CKS11 characteristics.

| Part or Identifying Number (PIN) 1/ | Capacitance (pF) | Capacitance tolerance | Voltage-temperature limits | Rated voltage (volts, dc) |
|---|---|---|---|---|
| M123A04BPDR10BW | 0.10 | B | BP | 200 |
| M123A04BPDR11BW | 0.11 | B | BP | 200 |
| M123A04BPDR12BW | 0.12 | B | BP | 200 |
| M123A04BPDR13BW | 0.13 | B | BP | 200 |
| M123A04BPDR15BW | 0.15 | B | BP | 200 |
| M123A04BPDR16BW | 0.16 | B | BP | 200 |
| M123A04BPDR18BW | 0.18 | B | BP | 200 |
| M123A04BPDR20BW | 0.20 | B | BP | 200 |
| M123A04BPDR22BW | 0.22 | B | BP | 200 |
| M123A04BPDR24BW | 0.24 | B | BP | 200 |
| M123A04BPDR27BW | 0.27 | B | BP | 200 |
| M123A04BPDR30BW | 0.30 | B | BP | 200 |
| M123A04BPDR33BW | 0.33 | B | BP | 200 |
| M123A04BPDR36BW | 0.36 | B | BP | 200 |
| M123A04BPDR39BW | 0.39 | B | BP | 200 |
| M123A04BPDR43BW | 0.43 | B | BP | 200 |
| M123A04BPDR47BW | 0.47 | B | BP | 200 |
| M123A04BPDR51BW | 0.51 | B | BP | 200 |
| M123A04BPDR56BW | 0.56 | B | BP | 200 |
| M123A04BPDR62BW | 0.62 | B | BP | 200 |
| M123A04BPDR68BW | 0.68 | B | BP | 200 |
| M123A04BPDR75BW | 0.75 | B | BP | 200 |
| M123A04BPDR82BW | 0.82 | B | BP | 200 |
| M123A04BPDR91BW | 0.91 | B | BP | 200 |
| M123A04BPD1R0-W | 1.0 | B, C | BP | 200 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance (pF) | Capacitance tolerance | Voltage-temperature limits | Rated voltage (volts, dc) |
|---|---|---|---|---|
| M123A04BPD1R1-W | 1.1 | B, C | BP | 200 |
| M123A04BPD1R2-W | 1.2 | B, C | BP | 200 |
| M123A04BPD1R3-W | 1.3 | B, C | BP | 200 |
| M123A04BPD1R5-W | 1.5 | B, C | BP | 200 |
| M123A04BPD1R6-W | 1.6 | B, C | BP | 200 |
| M123A04BPD1R8-W | 1.8 | B, C | BP | 200 |
| M123A04BPD2R0-W | 2.0 | B, C | BP | 200 |
| M123A04BPD2R2-W | 2.2 | B, C | BP | 200 |
| M123A04BPD2R4-W | 2.4 | B, C | BP | 200 |
| M123A04BPD2R7-W | 2.7 | B, C, D | BP | 200 |
| M123A04BPD3R0-W | 3.0 | B, C, D | BP | 200 |
| M123A04BPD3R3-W | 3.3 | B, C, D | BP | 200 |
| M123A04BPD3R6-W | 3.6 | B, C, D | BP | 200 |
| M123A04BPD3R9-W | 3.9 | B, C, D | BP | 200 |
| M123A04BPD4R3-W | 4.3 | B, C, D | BP | 200 |
| M123A04BP-4R7-W | 4.7 | B, C, D | BP | 100, 200 |
| M123A04BP-5R1-W | 5.1 | B, C, D | BP | 100, 200 |
| M123A04BP-6R2-W | 6.2 | B, C, D | BP | 100, 200 |
| M123A04BP-6R8-W | 6.8 | B, C, D | BP | 100, 200 |
| M123A04BP-7R5-W | 7.5 | B, C, D | BP | 100, 200 |
| M123A04BP-8R2-W | 8.2 | B, C, D | BP | 100, 200 |
| M123A04BP-9R1-W | 9.1 | B, C, D | BP | 100, 200 |
| M123A04BP-100-W | 10 | C, F, J, K | BP | 100, 200 |
| M123A04BP-110-W | 11 | C, F, J, K | BP | 100, 200 |
| M123A04BP-120-W | 12 | C, F, J, K | BP | 100, 200 |
| M123A04BP-130-W | 13 | C, F, J, K | BP | 100, 200 |
| M123A04BP-150-W | 15 | C, F, J, K | BP | 100, 200 |
| M123A04BP-160-W | 16 | C, F, J, K | BP | 100, 200 |
| M123A04BP-180-W | 18 | C, F, J, K | BP | 100, 200 |
| M123A04BP-200-W | 20 | C, F, J, K | BP | 100, 200 |
| M123A04BP-220-W | 22 | C, F, J, K | BP | 100, 200 |
| M123A04BP-240-W | 24 | C, F, J, K | BP | 100, 200 |
| M123A04BP-270-W | 27 | F, J, K | BP | 100, 200 |
| M123A04BP-300-W | 30 | F, J, K | BP | 100, 200 |
| M123A04BP-330-W | 33 | F, J, K | BP | 100, 200 |
| M123A04BP-360-W | 36 | F, J, K | BP | 100, 200 |
| M123A04BP-390-W | 39 | F, J, K | BP | 100, 200 |
| M123A04BP-430-W | 43 | F, J, K | BP | 100, 200 |
| M123A04BP-470-W | 47 | F, J, K | BP | 100, 200 |
| M123A04BP-510-W | 51 | F, J, K | BP | 100, 200 |
| M123A04BP-560-W | 56 | F, J, K | BP | 100, 200 |
| M123A04BP-620-W | 62 | F, J, K | BP | 100, 200 |
| M123A04BP-680-W | 68 | F, J, K | BP | 100, 200 |
| M123A04BP-750-W | 75 | F, J, K | BP | 100, 200 |
| M123A04BPC820-W | 82 | F, J, K | BP | 100 |
| M123A04BPC910-W | 91 | F, J, K | BP | 100 |
| M123A04BPC101-W | 100 | F, J, K | BP | 100 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS11 characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance (pF) | Capacitance tolerance | Voltage-temperature limits | Rated voltage (volts, dc) |
|---|---|---|---|---|
| M123A04BP-111-W | 110 | F, J, K | BP | 50, 100 |
| M123A04BP-121-W | 120 | F, J, K | BP | 50, 100 |
| M123A04BP-131-W | 130 | F, J, K | BP | 50, 100 |
| M123A04BP-151-W | 150 | F, J, K | BP | 50, 100 |
| M123A04BP-161-W | 160 | F, J, K | BP | 50, 100 |
| M123A04BP-181-W | 180 | F, J, K | BP | 50, 100 |
| M123A04BP-201-W | 200 | F, J, K | BP | 50, 100 |
| M123A04BP-221-W | 220 | F, J, K | BP | 50, 100 |
| M123A04BP-241-W | 240 | F, J, K | BP | 50, 100 |
| M123A04BPB271-W | 270 | F, J, K | BP | 50 |
| M123A04BPB301-W | 300 | F, J, K | BP | 50 |
| M123A04BPB331-W | 330 | F, J, K | BP | 50 |
| M123A04BPB361-W | 360 | F, J, K | BP | 50 |
| M123A04BPB391-W | 390 | F, J, K | BP | 50 |
| M123A04BPB431-W | 430 | F, J, K | BP | 50 |
| M123A04BPB471-W | 470 | F, J, K | BP | 50 |
| M123A04BPB511-W | 510 | F, J, K | BP | 50 |
| M123A04BPB561-W | 560 | F, J, K | BP | 50 |
| M123A04BPB621-W | 620 | F, J, K | BP | 50 |
| M123A04BPB681-W | 680 | F, J, K | BP | 50 |
| M123A04BXC101KW | 100 | K | BX | 100 |
| M123A04BXC121KW | 120 | K | BX | 100 |
| M123A04BXC151KW | 150 | K | BX | 100 |
| M123A04BXC181KW | 180 | K | BX | 100 |
| M123A04BXC221KW | 220 | K | BX | 100 |
| M123A04BXC271KW | 270 | K | BX | 100 |
| M123A04BXC331KW | 330 | K | BX | 100 |
| M123A04BXC391KW | 390 | K | BX | 100 |
| M123A04BXC471KW | 470 | K | BX | 100 |
| M123A04BXC561KW | 560 | K | BX | 100 |
| M123A04BXC681KW | 680 | K | BX | 100 |
| M123A04BXC821KW | 820 | K | BX | 100 |
| M123A04BXC102KW | 1,000 | K | BX | 100 |
| M123A04BXB122KW | 1,200 | K | BX | 50 |
| M123A04BXB152KW | 1,500 | K | BX | 50 |
| M123A04BXB182KW | 1,800 | K | BX | 50 |
| M123A04BXB222KW | 2,200 | K | BX | 50 |
| M123A04BXB272KW | 2,700 | K | BX | 50 |
| M123A04BXB332KW | 3,300 | K | BX | 50 |
| M123A04BXB392KW | 3,900 | K | BX | 50 |
| M123A04BXB472KW | 4,700 | K | BX | 50 |

1/ Complete PIN shall include an additional letter to indicate voltage and capacitance tolerance, if applicable.

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Review activities:
Air Force – 85, 99

Preparing activity:
DLA - CC

(Project 5910-2014-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.