

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS12

This specification sheet is approved for use by the George C. Marshall Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-123(NA).

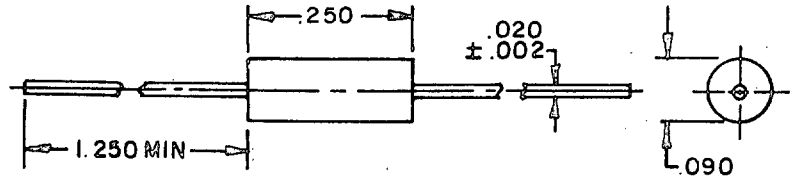



CIRCUIT DIAGRAM

INCHES	MM
.002	.05
.020	.51
.090	2.29
.250	6.35
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).

FIGURE 1. Style CKS12 capacitors.

FSC 5910

Source: https://assist.dla.mil - Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS12 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A05BPC111-W	110	FJK	BP	100
M123A05BPC121-W	120			
M123A05BPC131-W	130			
M123A05BPC151-W	150			
M123A05BPC161-W	160			
M123A05BPC181-W	180			
M123A05BPC201-W	200			
M123A05BPC221-W	220			
M123A05BPB241-W	240			50
M123A05BPB271-W	270			
M123A05BPB301-W	300			
M123A05BPB331-W	330			
M123A05BPB361-W	360			
M123A05BPB391-W	390			
M123A05BPB431-W	430			
M123A05BPB471-W	470			
M123A05BXC122KW	1200	K	BX	100
M123A05BXC152KW	1500			
M123A05BXC182KW	1800			
M123A05BXC222KW	2200			
M123A05BXC272KW	2700			
M123A05BXC332KW	3300			
M123A05BXC392KW	3900			
M123A05BXC472KW	4700			
M123A05BXB562KW	5600			50
M123A05BXB682KW	6800			
M123A05BXB822KW	8200			
M123A05BXB103KW	10000			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

Lead wire: Type W4 or W5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123(NA), example 4.

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11, 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K353-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.