NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/5A(NA)
28 September 1994
SUPERSEDING
MIL-C-123/5(NA)
13 March 1981

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS12

This specification sheet is approved by the Goddard Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

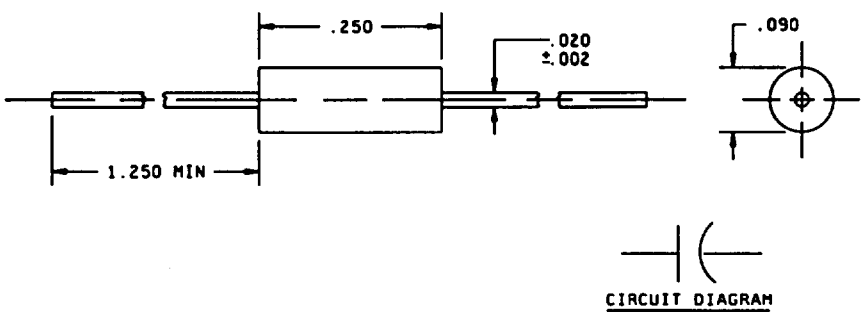

Inches	mm
.002	0.05
.020	0.51
.090	2.29
.250	6.35
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).

FIGURE 1. Style CKS12 capacitors.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS12 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A05BPC111-W	110	FJK	BP	100
M123A05BPC121-W	120	"	"	"
M123A05BPC131-W	130	"	"	"
M123A05BPC151-W	150	"	"	"
M123A05BPC161-W	160	"	"	"
M123A05BPC181-W	180	"	"	"
M123A05BPC201-W	200	"	"	"
M123A05BPC221-W	220	"	"	"
M123A05BPB241-W	240	"	"	50
M123A05BPB271-W	270	"	"	"
M123A05BPB301-W	300	"	"	"
M123A05BPB331-W	330	"	"	"
M123A05BPB361-W	360	"	"	"
M123A05BPB391-W	390	"	"	"
M123A05BPB431-W	430	"	"	"
M123A05BPB471-W	470	"	"	"
M123A05BXC122KW	1200	K	BX	100
M123A05BXC152KW	1500	"	"	"
M123A05BXC182KW	1800	"	"	"
M123A05BXC222KW	2200	"	"	"
M123A05BXC272KW	2700	"	"	"
M123A05BXC332KW	3300	"	"	"
M123A05BXC392KW	3900	"	"	"
M123A05BXC472KW	4700	"	"	"
M123A05BXB562KW	5600	"	"	50
M123A05BXB682KW	6800	"	"	"
M123A05BXB822KW	8200	"	"	"
M123A05BXB103KW	10,000	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

(A) Lead wire: Termination W in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 19, 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K478)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.