

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS14

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

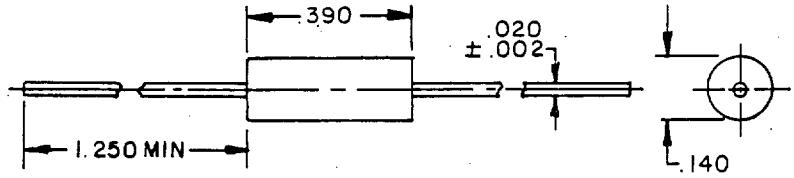



CIRCUIT DIAGRAM

INCHES	MM
.002	.05
.025	.64
.140	3.56
.390	9.91
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.010 (.25 mm).

FIGURE 1. Style CKS14 capacitors.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS14 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A06BPC241-W	240	FJK	BP	100
M123A06BPC271-W	270			
M123A06BPC301-W	300			
M123A06BPC331-W	330			
M123A06BPC361-W	360			
M123A06BPC391-W	390			
M123A06BPC431-W	430			
M123A06BPC471-W	470			
M123A06BPC511-W	510			
M123A06BPC561-W	560			
M123A06BPC621-W	620			
M123A06BPC681-W	680			
M123A06BPC751-W	750			
M123A06BPC821-W	820			
M123A06BPC911-W	910			
M123A06BPC102-W	1000			
M123A06BPB112-W	1100			50
M123A06BPB122-W	1200			
M123A06BPB132-W	1300			
M123A06BPB152-W	1500			
M123A06BPB162-W	1600			
M123A06BPB182-W	1800			
M123A06BPB202-W	2000			
M123A06BPB222-W	2200			
(A) M123A06BPB242-W	2400			
M123A06BPB272-W	2700			
M123A06BPB302-W	3000			
M123A06BPB332-W	3300			
M123A06BPB362-W	3600			
M123A06BPB392-W	3900			
M123A06BPB432-W	4300			
M123A06BPB472-W	4700			
M123A06BPB512-W	5100			
M123A06BPB562-W	5600			
M123A06BPB622-W	6200			
M123A06BPB682-W	6800			
M123A06BXC562KW	5600	K	BX	100
M123A06BXC682KW	6800			
M123A06BXC822KW	8200			
M123A06BXC103KW	10000			
M123A06BXB123KW	12000			50
M123A06BXB153KW	15000			
M123A06BXB183KW	18000			
M123A06BXB223KW	22000			
M123A06BXB273KW	27000			
M123A06BXB333KW	33000			
M123A06BXB393KW	39000			
M123A06BXB473KW	47000			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

Lead wire: Type W4 or W5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 5.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5910-1417-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.