NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/6B
28 September 1994
SUPERSEDING
MIL-C-123/6A
10 August 1982

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS14

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

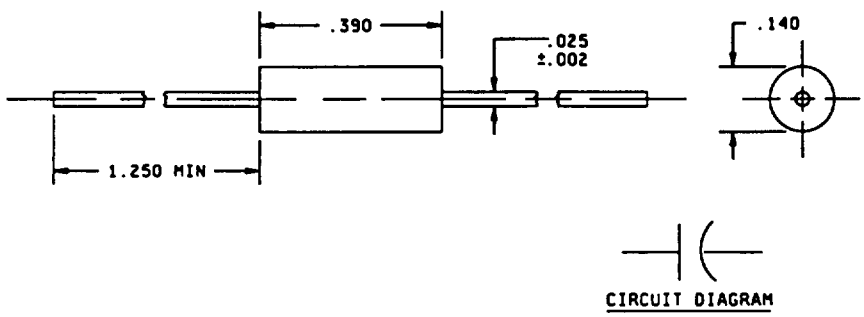

Inches	mm
.002	0.05
.025	0.64
.140	3.56
.390	9.91
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.010 (0.25 mm).

FIGURE 1. Style CKS14 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS14 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A06BPC241-W	240	FJK	BP	100
M123A06BPC271-W	270	"	"	"
M123A06BPC301-W	300	"	"	"
M123A06BPC331-W	330	"	"	"
M123A06BPC361-W	360	"	"	"
M123A06BPC391-W	390	"	"	"
M123A06BPC431-W	430	"	"	"
M123A06BPC471-W	470	"	"	"
M123A06BPC511-W	510	"	"	"
M123A06BPC561-W	560	"	"	"
M123A06BPC621-W	620	"	"	"
M123A06BPC681-W	680	"	"	"
M123A06BPC751-W	750	"	"	"
M123A06BPC821-W	820	"	"	"
M123A06BPC911-W	910	"	"	"
M123A06BPC102-W	1000	"	"	"
M123A06BPB112-W	1100	"	"	50
M123A06BPB122-W	1200	"	"	"
M123A06BPB132-W	1300	"	"	"
M123A06BPB152-W	1500	"	"	"
M123A06BPB162-W	1600	"	"	"
M123A06BPB182-W	1800	"	"	"
M123A06BPB202-W	2000	"	"	"
M123A06BPB222-W	2200	"	"	"
M123A06BPB242-W	2400	"	"	"
M123A06BPB272-W	2700	"	"	"
M123A06BPB302-W	3000	"	"	"
M123A06BPB332-W	3300	"	"	"
M123A06BPB362-W	3600	"	"	"
M123A06BPB392-W	3900	"	"	"
M123A06BPB432-W	4300	"	"	"
M123A06BPB472-W	4700	"	"	"
M123A06BPB512-W	5100	"	"	"
M123A06BPB562-W	5600	"	"	"
M123A06BPB622-W	6200	"	"	"
M123A06BPB682-W	6800	"	"	"
M123A06BXC562KW	5600	K	BX	100
M123A06BXC682KW	6800	"	"	"
M123A06BXC822KW	8200	"	"	"
M123A06BXC103KW	10,000	"	"	"
M123A06BXB123KW	12,000	"	"	50
M123A06BXB153KW	15,000	"	"	"
M123A06BXB183KW	18,000	"	"	"
M123A06BXB223KW	22,000	"	"	"
M123A06BXB273KW	27,000	"	"	"
M123A06BXB333KW	33,000	"	"	"
M123A06BXB393KW	39,000	"	"	"
M123A06BXB473KW	47,000	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

(B) Lead wire: Termination W in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 5.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1891-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.