
INCH-POUND
MIL-PRF-123/6G
16 August 2024
SUPERSEDING
MIL-PRF-123/6F
30 June 2019

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS14

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-123.

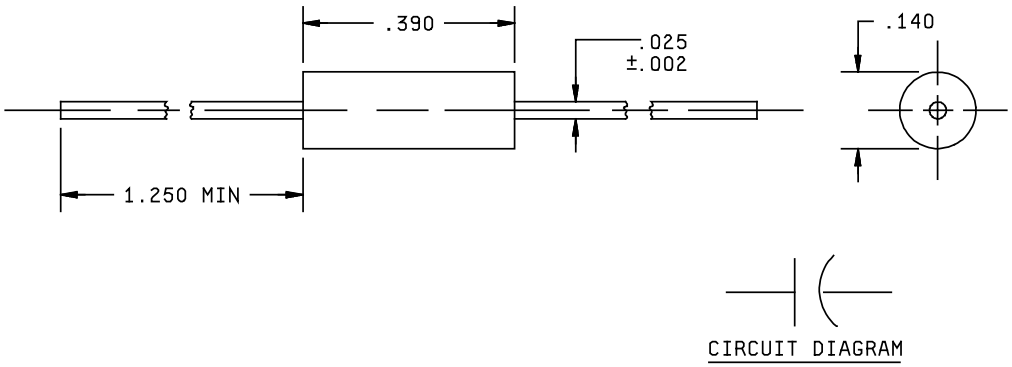

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information.
3. Unless otherwise specified, tolerance is ± .010 inch (0.25 mm).

Inches	mm
.002	0.05
.025	0.64
.140	3.56
.390	9.91
1.250	31.75

FIGURE 1. Style CKS14 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded, or preformed plastic encapsulated.

Lead wire: Termination W in accordance with MIL-PRF-123.

Capacitance value: See table I.

Voltage-temperature limit: BP and BX in accordance with MIL-PRF-123.

Capacitance tolerance: See table I (F = ± 1 percent; J = ± 5 percent; K = ± 10 percent).

Operating temperature: -55°C to +125°C.

Voltage rating: See table I (B = 50 Vdc; C = 100 Vdc; D = 200 Vdc).

Marking: In accordance with MIL-PRF-123, example 5.

TABLE I. Style CKS14 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A06BPD151-W	150	F, J, K	BP	200
M123A06BPD161-W	160	F, J, K	BP	200
M123A06BPD181-W	180	F, J, K	BP	200
M123A06BPD201-W	200	F, J, K	BP	200
M123A06BPD221-W	220	F, J, K	BP	200
M123A06BP-241-W	240	F, J, K	BP	100, 200
M123A06BP-271-W	270	F, J, K	BP	100, 200
M123A06BP-301-W	300	F, J, K	BP	100, 200
M123A06BP-331-W	330	F, J, K	BP	100, 200
M123A06BP-361-W	360	F, J, K	BP	100, 200
M123A06BP-391-W	390	F, J, K	BP	100, 200
M123A06BP-431-W	430	F, J, K	BP	100, 200
M123A06BP-471-W	470	F, J, K	BP	100, 200
M123A06BP-511-W	510	F, J, K	BP	100, 200
M123A06BP-561-W	560	F, J, K	BP	100, 200
M123A06BP-621-W	620	F, J, K	BP	100, 200
M123A06BP-681-W	680	F, J, K	BP	100, 200
M123A06BPC751-W	750	F, J, K	BP	100
M123A06BPC821-W	820	F, J, K	BP	100
M123A06BPC911-W	910	F, J, K	BP	100
M123A06BPC102-W	1,000	F, J, K	BP	100
M123A06BP-112-W	1,100	F, J, K	BP	50, 100
M123A06BP-122-W	1,200	F, J, K	BP	50, 100
M123A06BP-132-W	1,300	F, J, K	BP	50, 100
M123A06BP-152-W	1,500	F, J, K	BP	50, 100
M123A06BP-162-W	1,600	F, J, K	BP	50, 100
M123A06BP-182-W	1,800	F, J, K	BP	50, 100
M123A06BP-202-W	2,000	F, J, K	BP	50, 100
M123A06BP-222-W	2,200	F, J, K	BP	50, 100

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS14 characteristics - Continued.

PIN 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A06BPB242-W	2,400	F, J, K	BP	50
M123A06BPB272-W	2,700	F, J, K	BP	50
M123A06BPB302-W	3,000	F, J, K	BP	50
M123A06BPB332-W	3,300	F, J, K	BP	50
M123A06BPB362-W	3,600	F, J, K	BP	50
M123A06BPB392-W	3,900	F, J, K	BP	50
M123A06BPB432-W	4,300	F, J, K	BP	50
M123A06BPB472-W	4,700	F, J, K	BP	50
M123A06BPB512-W	5,100	F, J, K	BP	50
M123A06BPB562-W	5,600	F, J, K	BP	50
M123A06BPB622-W	6,200	F, J, K	BP	50
M123A06BPB682-W	6,800	F, J, K	BP	50
M123A06BXC562KW	5,600	K	BX	100
M123A06BXC682KW	6,800	K	BX	100
M123A06BXC822KW	8,200	K	BX	100
M123A06BXC103KW	10,000	K	BX	100
M123A06BXB123KW	12,000	K	BX	50
M123A06BXB153KW	15,000	K	BX	50
M123A06BXB183KW	18,000	K	BX	50
M123A06BXB223KW	22,000	K	BX	50
M123A06BXB273KW	27,000	K	BX	50
M123A06BXB333KW	33,000	K	BX	50
M123A06BXB393KW	39,000	K	BX	50
M123A06BXB473KW	47,000	K	BX	50

1/ Complete PIN shall include an additional letter to indicate voltage and capacitance tolerance, if applicable.

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
Other - NA

Review activities:
Air Force – 85

Preparing activity:
DLA - CC

(Project 5910-2024-037)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:10Z
Check the source to verify that this is the current version before use.