

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS15

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-123.

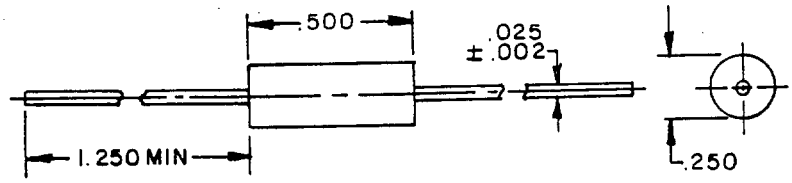



CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.002	.05	.250	6.35
.020	.51	.500	12.70
.025	.64	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.020.

FIGURE 1. Style CKS15 capacitors.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

FSC 5910

TABLE I. Style CKS15 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A07BPC112-W	1100	FJK	BP	100
M123A07BPC122-W	1200			
M123A07BPC132-W	1300			
M123A07BPC152-W	1500			
M123A07BPC162-W	1600			
M123A07BPC182-W	1800			
M123A07BPC202-W	2000			
M123A07BPC222-W	2200			
M123A07BPB242-W	2400			50
M123A07BPB272-W	2700			
M123A07BPB302-W	3000			
M123A07BPB332-W	3300			
(A) M123A07BPB362-W	3600			
M123A07BPB392-W	3900			
M123A07BPB432-W	4300			
M123A07BPB472-W	4700			
M123A07BPB512-W	5100			
M123A07BPB562-W	5600			
M123A07BPB622-W	6200			
M123A07BPB682-W	6800			
M123A07BPB752-W	7500			
M123A07BPB822-W	8200			
M123A07BPB912-W	9100			
M123A07BPB103-W	10000			
M123A07BPB113-W	11000			
M123A07BPB123-W	12000			
M123A07BPB133-W	13000			
M123A07BPB153-W	15000			
M123A07BPB163-W	16000			
M123A07BPB183-W	18000			
M123A07BPB203-W	20000			
M123A07BPB223-W	22000			
M123A07BXC123KW	12000	K	BX	100
M123A07BXC153KW	15000			
M123A07BXC183KW	18000			
M123A07BXC223KW	22000			
M123A07BXC273KW	27000			
M123A07BXC333KW	33000			
M123A07BXC393KW	39000			
M123A07BXC473KW	47000			
M123A07BXC563KW	56000			
M123A07BXC683KW	68000			
M123A07BXC823KW	82000			
M123A07BXC104KW	100000			
M123A07BXB124KW	120000			50
M123A07BXB154KW	150000			50
M123A07BXB184KW	180000			50

1/ The complete part number will include a symbol to indicate capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

Lead wire: Type W4 or W5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 5.

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5910-1417-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.