NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/7B
28 September 1994
SUPERSEDING
MIL-C-123/7A
10 August 1982

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC,
(TEMPERATURE STABLE AND GENERAL PURPOSE),
HIGH RELIABILITY, LEADED,
STYLE CKS15

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

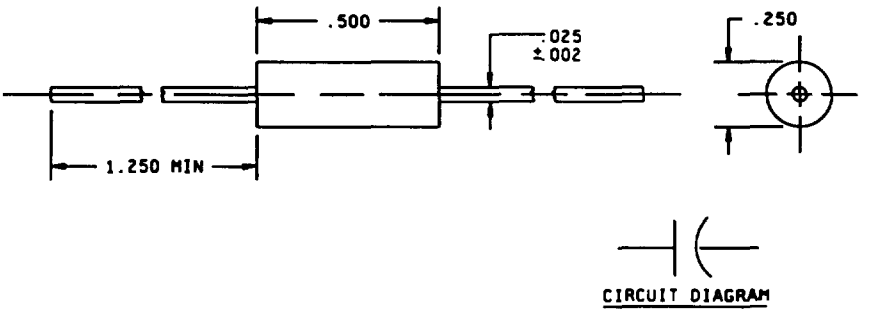

Inches	mm
.002	0.05
.020	0.51
.025	0.64
.250	6.35
.500	12.70
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.020.

FIGURE 1. Style CKS15 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS15 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pf			volts
M123A07BPC112-W	1100	FJK	BP	100
M123A07BPC122-W	1200	"	"	"
M123A07BPC132-W	1300	"	"	"
M123A07BPC152-W	1500	"	"	"
M123A07BPC162-W	1600	"	"	"
M123A07BPC182-W	1800	"	"	"
M123A07BPC202-W	2000	"	"	"
M123A07BPC222-W	2200	"	"	"
M123A07BPB242-W	2400	"	"	50
M123A07BPB272-W	2700	"	"	"
M123A07BPB302-W	3000	"	"	"
M123A07BPB332-W	3300	"	"	"
M123A07BPB362-W	3600	"	"	"
M123A07BPB392-W	3900	"	"	"
M123A07BPB432-W	4300	"	"	"
M123A07BPB472-W	4700	"	"	"
M123A07BPB512-W	5100	"	"	"
M123A07BPB562-W	5600	"	"	"
M123A07BPB622-W	6200	"	"	"
M123A07BPB682-W	6800	"	"	"
M123A07BPB752-W	7500	"	"	"
M123A07BPB822-W	8200	"	"	"
M123A07BPB912-W	9100	"	"	"
M123A07BPB103-W	10,000	"	"	"
M123A07BPB113-W	11,000	"	"	"
M123A07BPB123-W	12,000	"	"	"
M123A07BPB133-W	13,000	"	"	"
M123A07BPB153-W	15,000	"	"	"
M123A07BPB163-W	16,000	"	"	"
M123A07BPB183-W	18,000	"	"	"
M123A07BPB203-W	20,000	"	"	"
M123A07BPB223-W	22,000	"	"	"
M123A07BXC123KW	12,000	K	BX	100
M123A07BXC153KW	15,000	"	"	"
M123A07BXC183KW	18,000	"	"	"
M123A07BXC223KW	22,000	"	"	"
M123A07BXC273KW	27,000	"	"	"
M123A07BXC333KW	33,000	"	"	"
M123A07BXC393KW	39,000	"	"	"
M123A07BXC473KW	47,000	"	"	"
M123A07BXC563KW	56,000	"	"	"
M123A07BXC683KW	68,000	"	"	"
M123A07BXC823KW	82,000	"	"	"
M123A07BXC104KW	100,000	"	"	"
M123A07BXB124KW	120,000	"	"	50
M123A07BXB154KW	150,000	"	"	"
M123A07BXB184KW	180,000	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

(B) Lead wire: Termination W in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 5.

CONCLUDING MATERIAL

Custodians:
Air Force - 19
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-1891-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.