

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS16

This specification sheet is approved for use by the George C. Marshall Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-123(NA).

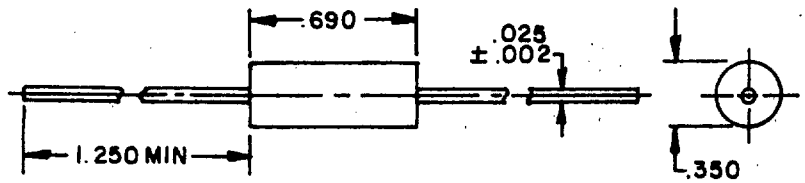



CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.002	.05	.350	8.89
.020	.51	.690	17.53
.025	.64	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.020.

FIGURE 1. Style CKS16 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS16 characteristics.

Part number 1/	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A08BPC242-W	2400	FJK	BP	100
M123A08BPC272-W	2700			
M123A08BPC302-W	3000			
M123A08BPC332-W	3300			
M123A08BPC362-W	3600			
M123A08BPC392-W	3900			
M123A08BPC432-W	4300			
M123A08BPC472-W	4700			
M123A08BPC512-W	5100			
M123A08BPC562-W	5600			
M123A08BPC622-W	6200			
M123A08BPC682-W	6800			
M123A08BPC822-W	8200			
M123A08BPC912-W	9100			
M123A08BPC103-W	10000			
M123A08BPB113-W	11000			50
M123A08BPB123-W	12000			
M123A08BPB133-W	13000			
M123A08BPB153-W	15000			
M123A08BPB163-W	16000			
M123A08BPB183-W	18000			
M123A08BPB203-W	20000			
M123A08BPB223-W	22000			
M123A08BXC124KW	120000	K	BX	100
M123A08BXC154KW	150000			
M123A08BXC184KW	180000			
M123A08BXC224KW	220000			
M123A08BXC274KW	270000			
M123A08BXC334KW	330000			
M123A08BXC394KW	390000			
M123A08BXC474KW	470000			
M123A08BXB564KW	560000			50
M123A08BXB684KW	680000			
M123A08BXB824KW	820000			
M123A08BXB105KW	1000000			

1/ The complete part number will include a symbol to indicate capacitance tolerance.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

Lead wire: Type W4 or W5 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55° to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123(NA), example 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 11, 19
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K353-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.