NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-123/8A(NA)
28 September 1994
SUPERSEDING
MIL-C-123/8(NA)
13 March 1981

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC,
(TEMPERATURE STABLE AND GENERAL PURPOSE),
HIGH RELIABILITY, LEADED,
STYLE CKS16

This specification sheet is approved by the Goddard Space Flight Center, National Aeronautics and Space Administration, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-123.

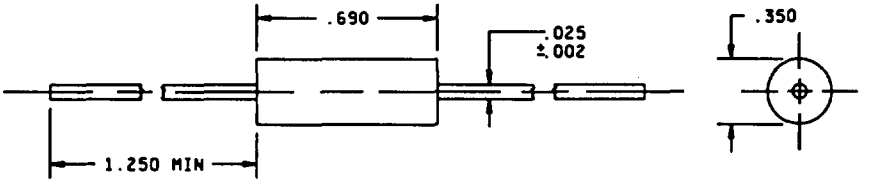

CIRCUIT DIAGRAM

Inches	mm	Inches	mm
.002	0.05	.350	8.89
.020	0.51	.690	17.53
.025	0.64	1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified tolerance is ±.020.

FIGURE 1. Style CKS16 capacitors.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS16 characteristics.

Part or Identifying 1/ Number (PIN)	Capacitance	Capacitance tolerance	Voltage-temperature limits	Rated voltage
	pF			volts
M123A08BPC242-W	2400	FJK	BP	100
M123A08BPC272-W	2700	"	"	"
M123A08BPC302-W	3000	"	"	"
M123A08BPC332-W	3300	"	"	"
M123A08BPC362-W	3600	"	"	"
M123A08BPC392-W	3900	"	"	"
M123A08BPC432-W	4300	"	"	"
M123A08BPC472-W	4700	"	"	"
M123A08BPC512-W	5100	"	"	"
M123A08BPC562-W	5600	"	"	"
M123A08BPC622-W	6200	"	"	"
M123A08BPC682-W	6800	"	"	"
M123A08BPC822-W	8200	"	"	"
M123A08BPC912-W	9100	"	"	"
M123A08BPC103-W	10,000	"	"	"
M123A08BPB113-W	11,000	"	"	50
M123A08BPB123-W	12,000	"	"	"
M123A08BPB133-W	13,000	"	"	"
M123A08BPB153-W	15,000	"	"	"
M123A08BPB163-W	16,000	"	"	"
M123A08BPB183-W	18,000	"	"	"
M123A08BPB203-W	20,000	"	"	"
M123A08BPB223-W	22,000	"	"	"
M123A08BXC124KW	120,000	K	BX	100
M123A08BXC154KW	150,000	"	"	"
M123A08BXC184KW	180,000	"	"	"
M123A08BXC224KW	220,000	"	"	"
M123A08BXC274KW	270,000	"	"	"
M123A08BXC334KW	330,000	"	"	"
M123A08BXC394KW	390,000	"	"	"
M123A08BXC474KW	470,000	"	"	"
M123A08BXB564KW	560,000	"	"	50
M123A08BXB684KW	680,000	"	"	"
M123A08BXB824KW	820,000	"	"	"
M123A08BXB105KW	1,000,000	"	"	"

1/ The complete PIN will include a symbol to indicate capacitance tolerance, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded or preformed plastic encapsulated.

(A) Lead wire: Termination W in accordance with MIL-C-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-C-123, example 5.

CONCLUDING MATERIAL

Custodian:
NASA - NA

Review activities:
Army - ER
Navy - EC
Air Force - 19, 85
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5910-K479)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.