INCH-POUND

MIL-PRF-123/8B
18 June 2001
SUPERSEDING
MIL-PRF-123/8A(NA)
28 September 1994

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS16

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-123.

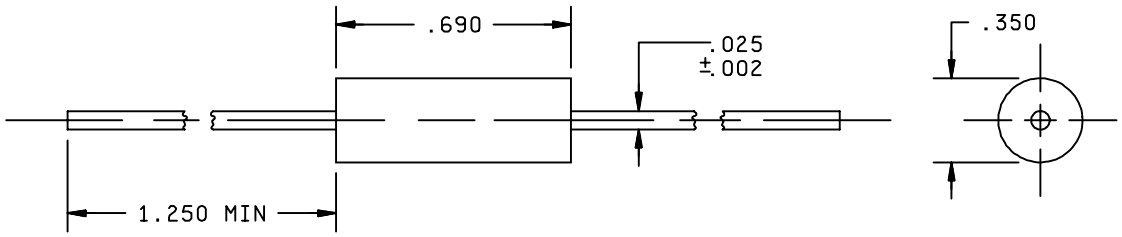


CIRCUIT DIAGRAM

| Inches | mm |
|---|---|
| .002 | 0.05 |
| .020 | 0.51 |
| .025 | 0.64 |
| .350 | 8.89 |
| .690 | 17.53 |
| 1.250 | 31.75 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 inch.

FIGURE 1. Style CKS16 capacitors.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded, or preformed plastic encapsulated.

Lead wire: Termination W in accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I.

Marking: In accordance with MIL-PRF-123, example 5.

TABLE I. Style CKS16 characteristics.

| Part or Identifying Number (PIN) 1/ | Capacitance (pF) | Capacitance tolerance | Voltage-temperature limits | Rated voltage (volts) |
|---|---|---|---|---|
| M123A08BPC242-W | 2,400 | F, J, K | BP | 100 |
| M123A08BPC272-W | 2,700 | F, J, K | BP | 100 |
| M123A08BPC302-W | 3,000 | F, J, K | BP | 100 |
| M123A08BPC332-W | 3,300 | F, J, K | BP | 100 |
| M123A08BPC362-W | 3,600 | F, J, K | BP | 100 |
| M123A08BPC392-W | 3,900 | F, J, K | BP | 100 |
| M123A08BPC432-W | 4,300 | F, J, K | BP | 100 |
| M123A08BPC472-W | 4,700 | F, J, K | BP | 100 |
| M123A08BPC512-W | 5,100 | F, J, K | BP | 100 |
| M123A08BPC562-W | 5,600 | F, J, K | BP | 100 |
| M123A08BPC622-W | 6,200 | F, J, K | BP | 100 |
| M123A08BPC682-W | 6,800 | F, J, K | BP | 100 |
| M123A08BPC822-W | 8,200 | F, J, K | BP | 100 |
| M123A08BPC912-W | 9,100 | F, J, K | BP | 100 |
| M123A08BPC103-W | 10,000 | F, J, K | BP | 100 |
| M123A08BPB113-W | 11,000 | F, J, K | BP | 50 |
| M123A08BPB123-W | 12,000 | F, J, K | BP | 50 |
| M123A08BPB133-W | 13,000 | F, J, K | BP | 50 |
| M123A08BPB153-W | 15,000 | F, J, K | BP | 50 |
| M123A08BPB163-W | 16,000 | F, J, K | BP | 50 |
| M123A08BPB183-W | 18,000 | F, J, K | BP | 50 |
| M123A08BPB203-W | 20,000 | F, J, K | BP | 50 |
| M123A08BPB223-W | 22,000 | F, J, K | BP | 50 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS16 characteristics - Continued.

| Part or Identifying Number (PIN) 1/ | Capacitance (pF) | Capacitance tolerance | Voltage-temperature limits | Rated voltage (volts) |
|---|---|---|---|---|
| M123A08BXC124KW | 120,000 | K | BX | 100 |
| M123A08BXC154KW | 150,000 | K | BX | 100 |
| M123A08BXC184KW | 180,000 | K | BX | 100 |
| M123A08BXC224KW | 220,000 | K | BX | 100 |
| M123A08BXC274KW | 270,000 | K | BX | 100 |
| M123A08BXC334KW | 330,000 | K | BX | 100 |
| M123A08BXC394KW | 390,000 | K | BX | 100 |
| M123A08BXC474KW | 470,000 | K | BX | 100 |
| M123A08BXB564KW | 560,000 | K | BX | 50 |
| M123A08BXB684KW | 680,000 | K | BX | 50 |
| M123A08BXB824KW | 820,000 | K | BX | 50 |
| M123A08BXB105KW | 1,000,000 | K | BX | 50 |

1/ Complete PIN shall include an additional letter to indicate capacitance tolerance, if applicable.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
NASA - NA

Review activities:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-2130-02)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.