
INCH-POUND
MIL-PRF-123/8F
16 August 2024
SUPERSEDING
MIL-PRF-123/8E
30 June 2019

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC (TEMPERATURE STABLE AND GENERAL PURPOSE), HIGH RELIABILITY, LEADED, STYLE CKS16

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-123.

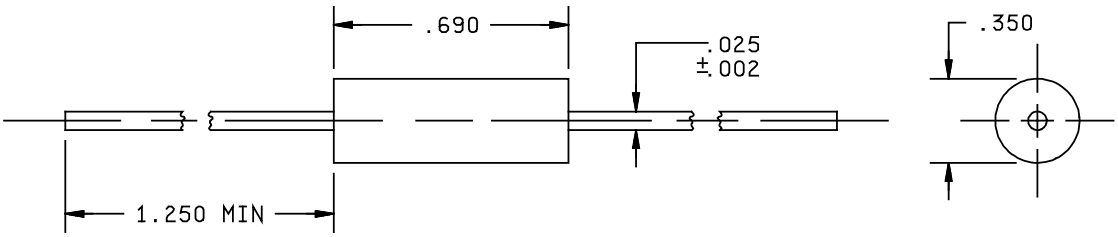

CIRCUIT DIAGRAM

Inches	mm
.002	0.05
.020	0.51
.025	0.64
.350	8.89
.690	17.53
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Unless otherwise specified, tolerance is ± .020 inch.

FIGURE 1. Style CKS16 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Tubular, molded, or preformed plastic encapsulated.

Lead wire: Termination W in accordance with MIL-PRF-123.

Capacitance value: See table I.

Capacitance tolerance: See table I (F = ± 1 percent; J = ± 5 percent; K = ± 10 percent).

Voltage-temperature limit: BP and BX in accordance with MIL-PRF-123.

Operating temperature: -55°C to +125°C.

Voltage rating: See table I (B = 50 Vdc; C = 100 Vdc; D = 200 Vdc).

Marking: In accordance with MIL-PRF-123, example 5.

TABLE I. Style CKS16 characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A08BPC242-W	2,400	F, J, K	BP	100
M123A08BPC272-W	2,700	F, J, K	BP	100
M123A08BPC302-W	3,000	F, J, K	BP	100
M123A08BPC332-W	3,300	F, J, K	BP	100
M123A08BPC362-W	3,600	F, J, K	BP	100
M123A08BP-392-W	3,900	F, J, K	BP	100, 200
M123A08BP-432-W	4,300	F, J, K	BP	100, 200
M123A08BP-472-W	4,700	F, J, K	BP	100, 200
M123A08BP-512-W	5,100	F, J, K	BP	100, 200
M123A08BP-562-W	5,600	F, J, K	BP	100, 200
M123A08BP-622-W	6,200	F, J, K	BP	100, 200
M123A08BP-682-W	6,800	F, J, K	BP	100, 200
M123A08BP-822-W	8,200	F, J, K	BP	100, 200
M123A08BP-912-W	9,100	F, J, K	BP	100, 200
M123A08BP-103-W	10,000	F, J, K	BP	100, 200
M123A08BPB113-W	11,000	F, J, K	BP	50
M123A08BPB123-W	12,000	F, J, K	BP	50
M123A08BPB133-W	13,000	F, J, K	BP	50
M123A08BP-153-W	15,000	F, J, K	BP	50, 100
M123A08BP-163-W	16,000	F, J, K	BP	50, 100
M123A08BP-183-W	18,000	F, J, K	BP	50, 100
M123A08BP-203-W	20,000	F, J, K	BP	50, 100
M123A08BP-223-W	22,000	F, J, K	BP	50, 100
M123A08BPC273-W	27,000	F, J, K	BP	100
M123A08BPC333-W	33,000	F, J, K	BP	100
M123A08BPC393-W	39,000	F, J, K	BP	100
M123A08BPB473-W	47,000	F, J, K	BP	50
M123A08BPB563-W	56,000	F, J, K	BP	50
M123A08BPB683-W	68,000	F, J, K	BP	50
M123A08BPB823-W	82,000	F, J, K	BP	50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.

TABLE I. Style CKS16 characteristics - Continued.

PIN 1/	Capacitance (pF)	Capacitance tolerance	Voltage-temperature limits	Rated voltage (volts, dc)
M123A08BXC124KW	120,000	K	BX	100
M123A08BXC154KW	150,000	K	BX	100
M123A08BXC184KW	180,000	K	BX	100
M123A08BXC224KW	220,000	K	BX	100
M123A08BXC274KW	270,000	K	BX	100
M123A08BXC334KW	330,000	K	BX	100
M123A08BXC394KW	390,000	K	BX	100
M123A08BXC474KW	470,000	K	BX	100
M123A08BXB564KW	560,000	K	BX	50
M123A08BXB684KW	680,000	K	BX	50
M123A08BXB824KW	820,000	K	BX	50
M123A08BXB105KW	1,000,000	K	BX	50

1/ Complete PIN shall include an additional letter to indicate voltage and capacitance tolerance, if applicable.

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
Air Force - 19
DLA - CC
Other - NA

Review activities:
Air Force – 85

Preparing activity:
DLA - CC

(Project 5910-2024-039)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:11Z
Check the source to verify that this is the current version before use.