INCH-POUND
MIL-PRF-6855/5A
15 June 2009
SUPERSEDING
MIL-R-6855/5
16 February 1987

PERFORMANCE SPECIFICATION SHEET

RUBBER, SYNTHETIC, CHANNEL, EXTRUDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-6855.

REQUIREMENTS:

Part numbers:

Part numbers for channel described herein shall consist of the prefix M, specification number, specification sheet number, and a six-digit dash number assigned using tables IA, IB, IC, ID, II, and III herein, as show in the following example:

| **M** | **6855** | **/** | **5** | **-** | **XXX** | **XX** | **X** |
|---|---|---|---|---|---|---|---|
| Prefix for Military Specification | Specification Number | | Specification Sheet Number | | Three-Digit Configuration Number (table IA, IB, IC, or ID, as applicable). | Two-Digit Classification Number (table II). | One-Digit Length Letter (table III). |

Example: M6855/5-XXXXXX

Dimensional tolerances:

Tolerances for channel dimensions shall in accordance with table IV herein. All corner and fillet radii shall be 0.015 inch except as otherwise specified. Tolerance for channel length shall be -0 percent, and +3 percent of the specified length.

Surface finish:

All synthetic rubber channel surfaces shall be smooth and free from pin holes, flash, or any other imperfections which may impair serviceability.

VERIFICATION:

Inspection and test of synthetic rubber channel shall be in accordance with MIL-PRF-6855, Section 4, VERIFICATION.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

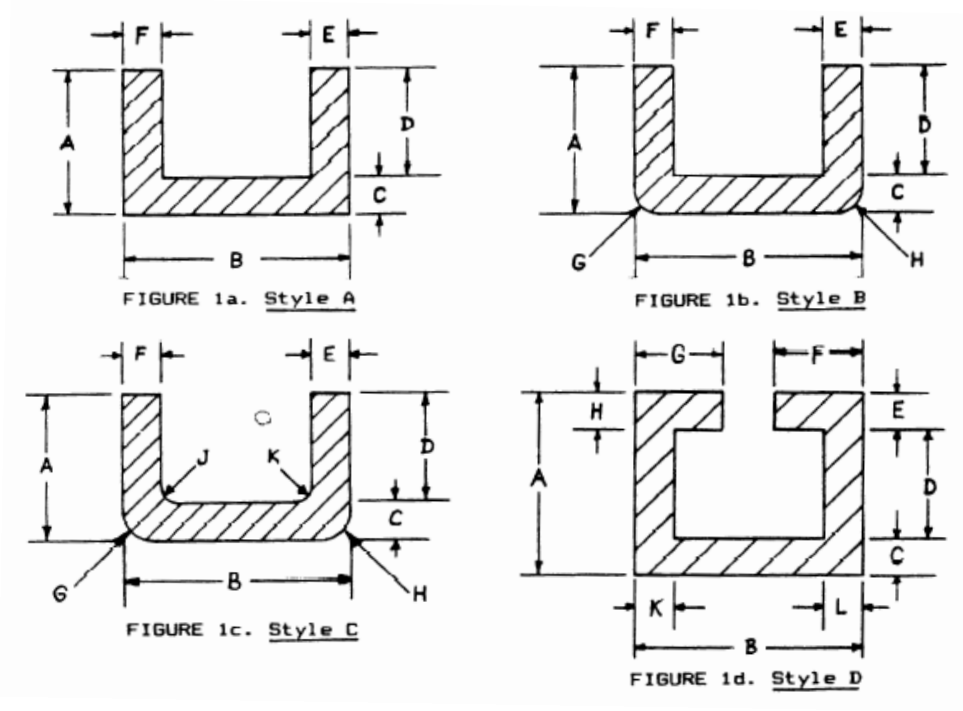



FIGURE 1. Channel Styles A, B, C & D.

TABLE IA. Channel dimensions – Style A.

| Config. Number | A (Inches) | B (Inches) | C (Inches) | D (Inches) | E (Inches) | F (Inches) | Notes |
|---|---|---|---|---|---|---|---|
| A02 | 0.250 | 0.188 | 0.125 | 0.125 | 0.062 | 0.062 | See Note 4 |
| A04 | 0.250 | 0.250 | 0.125 | 0.125 | 0.062 | 0.062 | See Note 4 |
| A06 | 0.250 | 0.500 | 0.125 | 0.125 | 0.125 | 0.125 | |
| A08 | 0.250 | 0.875 | 0.125 | 0.125 | 0.125 | 0.125 | |
| A10 | 0.312 | 0.156 | 0.062 | 0.250 | 0.062 | 0.062 | See Note 4 |
| A12 | 0.312 | 0.240 | 0.062 | 0.250 | 0.062 | 0.062 | See Note 4 |
| A14 | 0.312 | 0.300 | 0.062 | 0.250 | 0.062 | 0.062 | See Note 4 |
| A16 | 0.312 | 0.500 | 0.187 | 0.125 | 0.125 | 0.125 | |
| A18 | 0.312 | 0.875 | 0.125 | 0.187 | 0.125 | 0.125 | |
| A20 | 0.312 | 1.000 | 0.125 | 0.187 | 0.125 | 0.125 | |
| A22 | 0.375 | 0.875 | 0.125 | 0.250 | 0.125 | 0.125 | |
| A24 | 0.375 | 1.000 | 0.125 | 0.250 | 0.125 | 0.125 | |
| A26 | 0.438 | 0.375 | 0.063 | 0.375 | 0.063 | 0.063 | See Note 4 |
| A28 | 0.438 | 0.500 | 0.125 | 0.313 | 0.125 | 0.125 | |
| A32 | 0.500 | 0.156 | 0.063 | 0.437 | 0.063 | 0.063 | See Note 4 |
| A34 | 0.500 | 0.500 | 0.125 | 0.375 | 0.125 | 0.125 | |
| A36 | 0.500 | 1.000 | 0.125 | 0.375 | 0.125 | 0.125 | |
| A38 | 0.500 | 1.000 | 0.250 | 0.250 | 0.250 | 0.250 | |
| A40 | 0.875 | 0.875 | 0.125 | 0.750 | 0.125 | 0.125 | |
| A42 | 1.000 | 1.000 | 0.250 | 0.750 | 0.250 | 0.250 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

TABLE IB. Channel dimensions – Style B.

| Config. Number | A (Inches) | B (Inches) | C (Inches) | D (Inches) | E (Inches) | F (Inches) | G (Inches) | H (Inches) | Notes |
|---|---|---|---|---|---|---|---|---|---|
| B02 | 0.188 | 0.188 | 0.063 | 0.125 | 0.063 | 0.063 | 0.031 | 0.031 | See Note 4 |
| B04 | 0.250 | 0.250 | 0.125 | 0.125 | 0.062 | 0.062 | 0.060 | 0.060 | See Note 4 |
| B08 | 0.312 | 0.500 | 0.187 | 0.125 | 0.125 | 0.125 | 0.120 | 0.120 | |
| B10 | 0.400 | 0.160 | 0.125 | 0.275 | 0.060 | 0.060 | 0.080 | 0.080 | See Note 4 |
| B12 | 0.500 | 0.500 | 0.125 | 0.375 | 0.125 | 0.125 | 0.188 | 0.188 | |
| B14 | 1.000 | 1.000 | 0.250 | 0.750 | 0.250 | 0.250 | 0.188 | 0.188 | |

TABLE IC. Channel dimensions – Style C.

| Config. Number | A (Inches) | B (Inches) | C (Inches) | D (Inches) | E (Inches) | F (Inches) | G (Inches) | H (Inches) | J (Inches) | K (Inches) | Notes |
|---|---|---|---|---|---|---|---|---|---|---|---|
| C02 | 0.188 | 0.188 | 0.063 | 0.125 | 0.063 | 0.063 | 0.031 | 0.031 | 0.016 | 0.016 | See Note 4 |
| C04 | 0.250 | 0.250 | 0.064 | 0.186 | 0.102 | 0.102 | 0.064 | 0.064 | 0.023 | 0.023 | See Note 4 |
| C06 | 0.250 | 0.250 | 0.125 | 0.125 | 0.062 | 0.062 | 0.060 | 0.060 | 0.031 | 0.031 | See Note 4 |
| C10 | 0.312 | 0.500 | 0.187 | 0.125 | 0.125 | 0.125 | 0.120 | 0.120 | 0.060 | 0.060 | |
| C12 | 0.500 | 0.187 | 0.125 | 0.375 | 0.047 | 0.047 | 0.094 | 0.094 | 0.047 | 0.047 | See Note 4 |
| C14 | 0.500 | 0.500 | 0.125 | 0.375 | 0.125 | 0.125 | 0.188 | 0.188 | 0.080 | 0.080 | |
| C16 | 0.563 | 0.156 | 0.125 | 0.438 | 0.063 | 0.063 | 0.031 | 0.031 | 0.031 | 0.031 | See Note 4 |
| C18 | 0.938 | 0.250 | 0.063 | 0.875 | 0.063 | 0.063 | 0.125 | 0.125 | 0.063 | 0.063 | See Note 4 |
| C20 | 1.000 | 1.000 | 0.250 | 0.750 | 0.250 | 0.250 | 0.188 | 0.188 | 0.120 | 0.120 | |
| C22 | 1.250 | 0.875 | 0.250 | 1.000 | 0.250 | 0.250 | 0.188 | 0.188 | 0.062 | 0.062 | |

TABLE ID. Channel dimensions – Style D.

| Config. Number | A (Inches) | B (Inches) | C (Inches) | D (Inches) | E (Inches) | F (Inches) | G (Inches) | H (Inches) | K (Inches) | L (Inches) | Notes |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D02 | 0.165 | 0.600 | 0.062 | 0.041 | 0.062 | 0.188 | 0.188 | 0.062 | 0.050 | 0.050 | See Note 4 |
| D04 | 0.249 | 0.624 | 0.125 | 0.062 | 0.062 | 0.219 | 0.219 | 0.062 | 0.062 | 0.062 | See Note 4 |
| D06 | 0.281 | 1.000 | 0.125 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D08 | 0.281 | 1.250 | 0.125 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D10 | 0.437 | 1.375 | 0.250 | 0.062 | 0.125 | 0.312 | 0.312 | 0.125 | 0.125 | 0.125 | |
| D12 | 0.344 | 1.500 | 0.188 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D14 | 0.344 | 1.750 | 0.188 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D16 | 0.281 | 2.000 | 0.125 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D18 | 0.344 | 2.000 | 0.188 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D20 | 0.406 | 2.125 | 0.250 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D22 | 0.344 | 2.250 | 0.188 | 0.062 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D24 | 0.438 | 2.625 | 0.250 | 0.094 | 0.094 | 0.312 | 0.312 | 0.094 | 0.125 | 0.125 | |
| D26 | 0.469 | 3.062 | 0.250 | 0.094 | 0.125 | 0.375 | 0.375 | 0.125 | 0.156 | 0.156 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

TABLE II. Channel type, class, and grade.

| Classification Number | Classification of Requirements | | |
|---|---|---|---|
| 01 | | Class 1 | Grade 30 |
| 02 | | Class 1 | Grade 40 |
| 03 | | Class 1 | Grade 50 |
| 04 | | Class 1 | Grade 60 |
| 05 | | Class 1 | Grade 70 |
| 06 | | Class 1 | Grade 80 |
| 07 | Type A | Class 2 | Grade 30 |
| 08 | Type A | Class 2 | Grade 40 |
| 09 | Type A | Class 2 | Grade 50 |
| 10 | Type A | Class 2 | Grade 60 |
| 11 | Type A | Class 2 | Grade 70 |
| 12 | Type A | Class 2 | Grade 80 |
| 13 | Type B | Class 2 | Grade 30 |
| 14 | Type B | Class 2 | Grade 40 |
| 15 | Type B | Class 2 | Grade 50 |
| 16 | Type B | Class 2 | Grade 60 |
| 17 | Type B | Class 2 | Grade 70 |
| 18 | Type B | Class 2 | Grade 80 |
| 19 | | Class 3 | Grade 30 |
| 20 | | Class 3 | Grade 40 |
| 21 | | Class 3 | Grade 50 |
| 22 | | Class 3 | Grade 60 |
| 23 | | Class 3 | Grade 70 |
| 24 | | Class 3 | Grade 80 |
| 25 | Type A | Class 4 | Grade 30 |
| 26 | Type A | Class 4 | Grade 40 |
| 27 | Type A | Class 4 | Grade 50 |
| 28 | Type A | Class 4 | Grade 60 |
| 29 | Type A | Class 4 | Grade 70 |
| 30 | Type A | Class 4 | Grade 80 |
| 31 | Type B | Class 4 | Grade 30 |
| 32 | Type B | Class 4 | Grade 40 |
| 33 | Type B | Class 4 | Grade 50 |
| 34 | Type B | Class 4 | Grade 60 |
| 35 | Type B | Class 4 | Grade 70 |
| 36 | Type B | Class 4 | Grade 80 |
| 37 | | Class 5 | Grade 30 |
| 38 | | Class 5 | Grade 40 |
| 39 | | Class 5 | Grade 50 |
| 40 | | Class 5 | Grade 60 |
| 41 | | Class 5 | Grade 70 |
| 42 | | Class 5 | Grade 80 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

TABLE III. Channel length – L.

| Length Letter | L (Inches) |
|---|---|
| D | 48.000 |
| H | 168.000 |

TABLE IV. Dimensional tolerances for channel.

| Dimensional Range (Inches) | Tolerance |
|---|---|
| 0.015 to 0.040 inclusive | ±0.005 inches |
| Over 0.041 to 0.062 inclusive | ±0.012 inches |
| Over 0.062 to 0.125 inclusive | ±0.016 inches |
| Over 0.125 to 0.187 inclusive | ±0.020 inches |
| Over 0.187 to 0.375 inclusive | ±0.031 inches |
| Over 0.375 to 0.562 inclusive | ±0.047 inches |
| Over 0.562 to 0.750 inclusive | ±0.063 inches |
| Over 0.750 to 1.000 | ±0.093 inches |
| 1.000 and over | ±10% dim. |

**Metric Conversion Chart**[1/]

| Inch | mm | Inch | mm | Inch | mm | Inch | mm |
|---|---|---|---|---|---|---|---|
| 0.015 | 0.380 | 0.120 | 3.05 | 0.300 | 7.62 | 0.750 | 19.05 |
| 0.016 | 0.41 | 0.125 | 3.18 | 0.312 | 7.92 | 0.875 | 22.23 |
| 0.023 | 0.58 | 0.140 | 3.56 | 0.313 | 7.95 | 0.938 | 23.83 |
| 0.031 | 0.79 | 0.156 | 3.96 | 0.343 | 8.71 | 1.000 | 25.40 |
| 0.041 | 1.04 | 0.160 | 4.06 | 0.344 | 8.74 | 1.250 | 31.75 |
| 0.047 | 1.19 | 0.165 | 4.19 | 0.375 | 9.53 | 1.375 | 34.93 |
| 0.050 | 1.27 | 0.186 | 4.72 | 0.400 | 10.16 | 1.500 | 38.10 |
| 0.060 | 1.52 | 0.187 | 4.75 | 0.406 | 10.31 | 1.750 | 44.45 |
| 0.062 | 1.57 | 0.188 | 4.78 | 0.437 | 11.10 | 2.000 | 50.80 |
| 0.063 | 1.60 | 0.219 | 5.56 | 0.438 | 11.13 | 2.125 | 53.98 |
| 0.064 | 1.63 | 0.234 | 5.94 | 0.469 | 11.91 | 2.250 | 57.15 |
| 0.078 | 1.98 | 0.240 | 6.10 | 0.500 | 12.70 | 2.625 | 66.68 |
| 0.080 | 2.03 | 0.249 | 6.32 | 0.531 | 13.49 | 3.062 | 77.77 |
| 0.094 | 2.39 | 0.250 | 6.35 | 0.563 | 14.30 | 48.000 | 1219.20 |
| 0.102 | 2.59 | 0.275 | 6.99 | 0.600 | 15.24 | 168.000 | 4267.20 |
| 0.109 | 2.77 | 0.281 | 7.14 | 0.624 | 15.85 | | |

NOTE:

1/ See general note 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

GENERAL NOTES TO TABLES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Use of this specification sheet for US Army Communications-Electronics Command is restricted to Class 4 and Class 5 synthetic rubber.
4. These channel configurations shall apply only for synthetic rubber grades 50, 60, 70, and 80 of MIL-PRF-6855.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – MR
Navy – SH
Air Force – 11
DLA – CC

Preparing Activity:
Navy – SH
(Project 4720-2008-021)

Review Activities:
Army – AR, AT, AV, CE, CR, MI
Navy – AS, OS, YD
Air Force – 71, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.