MILITARY SPECIFICATION SHEET

RUBBER, SYNTHETIC, RODS (OR ROUNDS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirement for acquiring the rods described herein shall consist of this document and the latest issue of MIL-R-6855.

REQUIREMENTS:

Part Numbers:

Part numbers shall consist of the prefix M, specification number, specification sheet number, and a six-digit dash number assigned using Tables I, II, and III herein, as shown in the following example:

EXAMPLE:

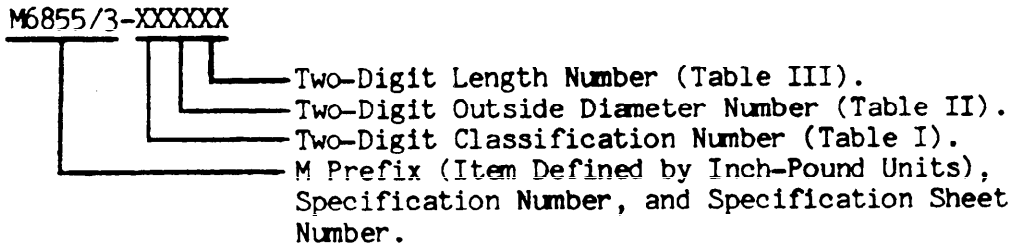

Dimensional Tolerances:

Tolerances of MIL-R-6855, Table III, shall apply to rod outside diameters. Tolerance for rod lengths shall be -0%,+3%.

Surface finish:

All synthetic rubber rod surfaces shall be smooth and free from cloth imprint.

Physical properties:

Physical properties of Classes 1, 2, and 3 synthetic rubber rods shall conform to MIL-R-6855, Table IV. Classes 4 and 5, synthetic rubber rods shall conform to MIL-R-6855, Table V.

Quality Assurance:

Inspection and test of synthetic rubber rods shall be in accordance with MIL-R-6855, Section 4, QUALITY ASSURANCE PROVISIONS.

FSC 4720, 5330, 9320

AMSC: N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T07:34Z
Check the source to verify that this is the current version before use.

TABLE I

TYPE, CLASS, GRADE

Classification Number	Classification of Requirements
01	CLASS 1 GRADE 30
02	CLASS 1 GRADE 40
03	CLASS 1 GRADE 50
04	CLASS 1 GRADE 60
05	CLASS 1 GRADE 70
06	CLASS 1 GRADE 80
07	TYPE A CLASS 2 GRADE 30
08	TYPE A CLASS 2 GRADE 40
09	TYPE A CLASS 2 GRADE 50
10	TYPE A CLASS 2 GRADE 60
11	TYPE A CLASS 2 GRADE 70
12	TYPE A CLASS 2 GRADE 80
13	TYPE B CLASS 2 GRADE 30
14	TYPE B CLASS 2 GRADE 40
15	TYPE B CLASS 2 GRADE 50
16	TYPE B CLASS 2 GRADE 60
17	TYPE B CLASS 2 GRADE 70
18	TYPE B CLASS 2 GRADE 80
19	CLASS 3 GRADE 30
20	CLASS 3 GRADE 40
21	CLASS 3 GRADE 50
22	CLASS 3 GRADE 60
23	CLASS 3 GRADE 70
24	CLASS 3 GRADE 80
25	TYPE A CLASS 4 GRADE 30
26	TYPE A CLASS 4 GRADE 40
27	TYPE A CLASS 4 GRADE 50
28	TYPE A CLASS 4 GRADE 60
29	TYPE A CLASS 4 GRADE 70
30	TYPE A CLASS 4 GRADE 80
31	TYPE B CLASS 4 GRADE 30
32	TYPE B CLASS 4 GRADE 40
33	TYPE B CLASS 4 GRADE 50
34	TYPE B CLASS 4 GRADE 60
35	TYPE B CLASS 4 GRADE 70
36	TYPE B CLASS 4 GRADE 80
37	CLASS 5 GRADE 30
38	CLASS 5 GRADE 40
39	CLASS 5 GRADE 50
40	CLASS 5 GRADE 60
41	CLASS 5 GRADE 70
42	CLASS 5 GRADE 80

TABLE II

OUTSIDE DIAMETER - OD

Outside Diameter Number	OD (Inches)
04	0.156
08	0.188
12	0.250
16	0.312
20	0.375
24	0.438
28	0.500
32	0.563
36	0.625
40	0.750
44	0.875
48	1.000
52	1.125
56	1.250
60	1.500

TABLE III

ROD LENGTH - L

Rod Length Number	L (Inches)
02	12.000
04	96.000
06	144.000
08	300.000
10	1800.000

INCH	MM
0.156	3.96
0.188	4.78
0.250	6.35
0.312	7.92
0.375	9.53
0.438	11.07
0.500	12.70
0.563	14.30
0.625	15.88
0.750	19.05
0.875	22.23
1.000	25.40
1.125	28.58
1.250	31.75
1.500	38.10
12.000	304.80
96.000	2438.40
144.000	3657.60
300.000	7620.00
1800.000	45720.00

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Use of this specification sheet for US Army Electronics Command is restricted to Class 4 and Class 5 synthetic rubber sheets.

Custodians:
Army - MR
Navy - AS
Air Force - 20

Preparing Activity:
Navy - AS

Agent
DLA-GS
(Project 9320-0473-03)

Review Activities:
Army - AR, AT, AV, CR, ER, MI
Air Force - 82, 99
Navy - OS, SH
DLA - CS, GS, IS

User Activity:
Army - CE
Navy - YD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:34Z
Check the source to verify that this is the current version before use.