MILITARY SPECIFICATION SHEET

RUBBER, SYNTHETIC, SPECIAL SHAPE, EXTRUDED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for acquiring the special shapes described herein shall consist of this specification and the latest issue of MIL-R-6855.

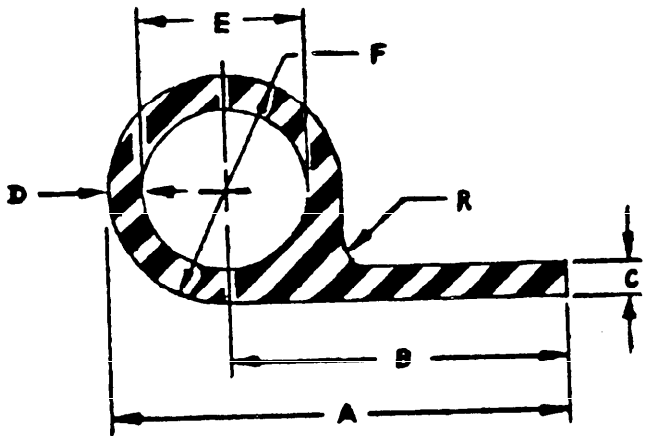


FIGURE 1. Special Shape Configuration.

INCH	MM
.015	.38
.030	.76
.031	.79
.034	.86
.040	1.02
.045	1.14
.047	1.20
.048	1.22
.050	1.27
.055	1.40
.060	1.53
.061	1.55
.062	1.58
.063	1.60
.078	1.98
.080	2.03
.093	2.36
.094	2.39
.106	2.69
.124	3.15
.125	3.18
.126	3.20
.128	3.25
.150	3.81
.170	4.32
.186	4.72

REQUIREMENTS:

Part Numbers:

Part numbers for special shape described herein shall consist of the prefix M, specification number, specification sheet number, and a six-digit dash number assigned using Tables I, II, and III herein, as shown in the following example:

AMSC: N/A

FSC 4720, 5330, 9320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:35Z
Check the source to verify that this is the current version before use.

EXAMPLE:

M6855/6-XXXXXX

- One-Digit Length Letter (Table III).
- Two-Digit Classification Number (Table II).
- Three-Digit Configuration Number (Table I).
- M Prefix (Item Defined by Inch-Pound Units), Specification Number, and Specification Sheet Number.

Dimensional Tolerances:

Tolerances for special shape dimensions shall be in accordance with Table IV herein. Tolerance for special shape length shall be 0%, +3%

Surface Finish:

All synthetic rubber special shape surfaces shall be smooth and free from pin holes, flash, or any other imperfections which may impair serviceability. serviceability.

Physical Properties:

Physical properties of Classes 1, 2, and 3 synthetic rubber special shapes shall conform to MIL-R-6855, Table IV. Classes 4 and 5 synthetic rubber special shapes shall conform to MIL-R-6855, Table V.

Quality Assurance:

Inspection and test of synthetic rubber special shapes shall be in accordance with MIL-R-6855, Section 4, QUALITY ASSURANCE PROVISIONS.

TABLE I

SPECIAL SHAPE DIMENSIONS - (SEE FIG. 1)

Config. Number	A (Inches)	B (Inches)	C (Inches)	D (Inches)	E (Inches)	F (Inches)	R (Inches)	Notes
005	0.625	0.531	0.063	0.032	0.124	0.188	0.015	See Note 4
010	0.625	0.531	0.047	0.047	0.094	0.188	0.015	See Note 4
015	0.640	0.540	0.062	0.061	0.078	0.200	0.015	See Note 4
020	0.687	0.561	0.063	0.063	0.126	0.252	0.015	See Note 4
025	0.695	0.570	0.040	0.040	0.170	0.250	0.015	See Note 4
030	0.750	0.562	0.063	0.031	0.314	0.376	0.125	See Note 4
035	0.750	0.594	0.031	0.031	0.250	0.312	0.015	See Note 4
040	0.781	0.625	0.031	0.031	0.250	0.312	0.031	See Note 4
045	0.750	0.655	0.047	0.031	0.128	0.190	0.015	See Note 4
050	0.750	0.655	0.060	0.048	0.094	0.190	0.090	See Note 4
055	0.750	0.656	0.047	0.031	0.126	0.188	0.015	See Note 4
060	0.875	0.688	0.062	0.062	0.250	0.374	0.015	See Note 4
065	0.875	0.719	0.031	0.031	0.250	0.312	0.015	See Note 4
070	0.900	0.775	0.050	0.050	0.150	0.250	0.125	See Note 4
075	0.906	0.750	0.031	0.031	0.250	0.312	0.015	See Note 4
080	1.000	0.750	0.062	0.055	0.390	0.500	0.031	See Note 4
085	1.000	0.750	0.062	0.062	0.376	0.500	0.015	See Note 4
090	1.000	0.750	0.063	0.062	0.376	0.500	0.063	See Note 4
095	1.000	0.751	0.031	0.031	0.436	0.498	0.031	See Note 4
100	1.000	0.812	0.094	0.094	0.188	0.376	0.015	
105	1.000	0.860	0.060	0.040	0.200	0.280	0.030	See Note 4
110	1.000	0.875	0.062	0.062	0.126	0.250	0.015	See Note 4
115	1.000	0.907	0.040	0.040	0.106	0.186	0.015	See Note 4
120	1.062	0.875	0.125	0.062	0.250	0.374	0.015	See Note 4
125	1.125	0.812	0.063	0.063	0.500	0.626	0.015	See Note 4
130	1.125	0.875	0.062	0.062	0.376	0.500	0.015	See Note 4
135	1.125	0.936	0.047	0.047	0.284	0.378	0.015	See Note 4
140	1.130	0.780	0.080	0.080	0.540	0.700	0.060	
145	1.130	0.940	0.060	0.060	0.250	0.380	0.060	See Note 4
150	1.219	1.000	0.032	0.032	0.374	0.438	0.015	See Note 4
155	1.250	1.000	0.062	0.062	0.376	0.500	0.015	See Note 4
160	1.281	1.125	0.062	0.062	0.186	0.312	0.062	See Note 4
165	1.300	0.970	0.080	0.060	0.540	0.660	0.060	See Note 4
170	1.370	1.200	0.060	0.045	0.250	0.340	0.030	See Note 4
175	1.372	1.057	0.062	0.062	0.506	0.630	0.015	See Note 4
180	1.500	1.219	0.093	0.093	0.376	0.562	0.094	
185	1.500	1.249	0.063	0.063	0.376	0.502	0.015	See Note 4
190	1.656	1.125	0.062	0.062	0.938	1.062	0.015	See Note 4
195	1.687	1.312	0.050	0.050	0.650	0.750	0.015	See Note 4
200	2.000	1.187	0.125	0.125	1.376	1.626	0.015	
205	2.250	2.060	0.060	0.060	0.260	0.380	0.015	See Note 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.

TABLE III

SPECIAL SHAPE LENGTH - L	
Length Letter	L (Inches)
D	96.000
H	168.000

TABLE II

SPECIAL SHAPE TYPE, CLASS, AND GRADE	
Classification Number	Classification of Requirements
01	CLASS 1 GRADE 30
02	CLASS 1 GRADE 40
03	CLASS 1 GRADE 50
04	CLASS 1 GRADE 60
05	CLASS 1 GRADE 70
06	CLASS 1 GRADE 80
07	TYPE A CLASS 2 GRADE 30
08	TYPE A CLASS 2 GRADE 40
09	TYPE A CLASS 2 GRADE 50
10	TYPE A CLASS 2 GRADE 60
11	TYPE A CLASS 2 GRADE 70
12	TYPE A CLASS 2 GRADE 80
13	TYPE B CLASS 2 GRADE 30
14	TYPE B CLASS 2 GRADE 40
15	TYPE B CLASS 2 GRADE 50
16	TYPE B CLASS 2 GRADE 60
17	TYPE B CLASS 2 GRADE 70
18	TYPE B CLASS 2 GRADE 80
19	CLASS 3 GRADE 30
20	CLASS 3 GRADE 40
21	CLASS 3 GRADE 50
22	CLASS 3 GRADE 60
23	CLASS 3 GRADE 70
24	CLASS 3 GRADE 80
25	TYPE A CLASS 4 GRADE 30
26	TYPE A CLASS 4 GRADE 40
27	TYPE A CLASS 4 GRADE 50
28	TYPE A CLASS 4 GRADE 60
29	TYPE A CLASS 4 GRADE 70
30	TYPE A CLASS 4 GRADE 80
31	TYPE B CLASS 4 GRADE 30
32	TYPE B CLASS 4 GRADE 40
33	TYPE B CLASS 4 GRADE 50
34	TYPE B CLASS 4 GRADE 60
35	TYPE B CLASS 4 GRADE 70
36	TYPE B CLASS 4 GRADE 80
37	CLASS 5 GRADE 30
38	CLASS 5 GRADE 40
39	CLASS 5 GRADE 50
40	CLASS 5 GRADE 60
41	CLASS 5 GRADE 70
42	CLASS 5 GRADE 80

TABLE IV

DIMENSIONAL TOLERANCES FOR SPECIAL SHAPE	
Dimensional Range (Inches)	Tolerance (Inches)
.015 to .040 inclusive	+ or - .005
over .040 to .062 inclusive	+ or - .012
over .062 to .125 inclusive	+ or - .016
over .125 to .187 inclusive	+ or - .020
over .187 to .375 inclusive	+ or - .031
over .375 to .562 inclusive	+ or - .047
over .562 to .750 inclusive	+ or - .063
over .750 to 1.000	+ or - .093
1.000 and over	+ or - 10%

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Use of this specification sheet for US Army Communications-Electronics Command is restricted to Class 4 and Class 5 synthetic rubber.
4. These configurations shall apply only for synthetic rubber grades 50, 60, 70, and 80 of MIL-R-6855.

Custodians:

Army - MR
Navy - AS
Air Force - 20

Review Activities:

Army - AR, AT, AV, CR, ER, MI
Air Force - 82, 99
Navy - OS, SH
DLA - CS, GS, IS

User Activities:

Army - CE
Navy - YD

Preparing Activity:

Navy - AS

Agent:

DLA-GS
(Project 9320-0473-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:35Z
Check the source to verify that this is the current version before use.