INCH-POUND

MIL-DTL-6055E
30 June 2026
SUPERSEDING
MIL-D-6055D
29 December 1987

DETAIL SPECIFICATION

DRUM, METAL REUSABLE, SHIPPING AND STORAGE (CAP. FROM 88 TO 510 CUBIC INCHES)

Inactive for new design after 12 April 2001

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for new reusable cylindrical drums consisting of body, cover, gasket, and closing device(s) to be used as interior and exterior shipping containers.

1.2 Classification. Drums, metal, shipping, and storage may be of the following types, classes, and sizes as specified (see MS24347 and 6.2).

Type I - Formed Drum
Type II - Drawn Drum
Class A - Aluminum Alloy Drum
Class S - Steel Drum
Style D - Dome Cover
Style R - Recessed Cover
Size No. 1 - 88 Cubic Inch Capacity
Size No. 2 - 167 Cubic Inch Capacity
Size No. 3 - 149 Cubic Inch Capacity
Size No. 4 - 224 Cubic Inch Capacity
Size No. 5 - 282 Cubic Inch Capacity
Size No. 6 - 340 Cubic Inch Capacity
Size No. 7 - 425 Cubic Inch Capacity
Size No. 8 - 510 Cubic Inch Capacity

2. APPLICABLE PUBLICATIONS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to: DLA Troop Support-Construction and Equipment (C&E) (ATTN: Code FCSB), 700 Robbins Ave, Philadelphia, PA 19111-5096 or email to CE_Standardization@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8110
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL SPECIFICATION

TT-P-1757	Primer Coating, ALKYD Base, One Component
PPP-C-1120	Cushioning Material, Uncompressed Bound Fiber for Packaging

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-6855	Elastomer, Synthetic, Sheets, Strips, Molded or Extruded Shapes, General Specification For

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	Identification Marking of US Military Property
MS24347	Drum, Metal, Reusable Shipping and Storage

(Copies of these documents are available online at https://assist.dla.mil.)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4	Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available from https://www.asq.org/ or the American Society for Quality, 611 East Wisconsin Avenue, Milwaukee, WI 53202.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS STANDARD (ASTM)

ASTM A109/A109M	Standard Specification for Steel, Strip, Carbon (0.25 Maximum Percent), Cold-Rolled
ASTM A1008/A1008M	Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloys, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable
ASTM B117	Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM D610	Standard Test Method for Evaluation Degree of Rusting on Painted Steel Surfaces-SSPC-VIS-2

(Copies of these documents are available from https://www.astm.org/ or the American Society for Testing and Materials, 100 Barr Harbor Drive, W. Conshohocken, PA 19428-2959.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE AMS-STD-595	Colors Used in Government Procurement

(Copies of this document are available from https://www.sae.org or SAE International, 400Commonwealth Drive, Warrendale, PA 15096-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this specification and the references cited herein, the text of this specification takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 MS sheets. The individual item requirements shall be as specified and in accordance with the applicable MS sheet. In the event of any conflict between the requirements of this specification and the MS sheet, the latter shall govern.

3.2 First article. When specified in the contract or purchase order a sample shall be subjected to first article inspection (see 4.4, 6.2 and 6.3).

3.3 Material. The material shall be as specified herein. However, when a specific material is not designated, a material shall be used which will enable the drums to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guarantee of the acceptance of the finished product.

3.3.1 Class A drums. Drums and covers shall be constructed of an aluminum or aluminum alloy to satisfy the test, surface finish, and serviceability of this specification. The closing device shall be fabricated or coated with a metallic material compatible with respect to its position in the galvanic series, as the aluminum used in the drum and cover (see 4.5).

3.3.2 Class S drums. Drums and covers shall be constructed of steel conforming to the requirements of ASTM A1008/A1008M. Strips for lugs and locking rings shall conform to ASTM A109/A109M, and be constructed of cold rolled strip steel, quarter-hard No. 3 temper, edge condition No. 4 round edge rolled and free from burrs and sharp edges. The closing device shall be fabricated from material which will exclude any galvanic corrosion between components of the drum and shall be free from burrs and sharp edges (see 4.5).

3.3.3 Gaskets. Gaskets shall be formed from synthetic rubber conforming to MIL-PRF-6855, Class 2, Grade 60. After forming, the gaskets shall lie naturally with the flat surface parallel to the horizontal plane (see 4.6.3).

3.4 Design and construction. The drum and component shall be constructed in accordance MS24347, except that metal thicknesses shown in the drawing shall be interpreted as specified minimal. The dimensions of each drum design and effective thicknesses of its components shall be such that the drum meets all the requirements of 4.5 and 4.6.2 of this specification.

3.4.1 Cover. The drum cover may be either recessed or dome style. Unless otherwise specified by the procuring activity, the recessed drum cover will be furnished in accordance with MS24347. Evaluate in accordance with 4.6.2 and 4.6.4.

3.4.2 Locking ring seal and closure device. The closure device shall consist of a locking ring, a bolt and nut conforming to MS24347, and a fixture to place a wire and lead tamperproof seal that cannot be removed without destroying the seal (see 4.6.1 and 4.6.4.1). The bolt and lugs shall not be distorted when the closure device is subjected to the required torque (see 4.5.1). Other types of closing devices may be used providing they are specified by the procuring agency and meet the other test requirements in this specification (see 4.6.3).

3.4.3 Relative humidity indicator plug. When specified by the procuring activity, the drum body shall be provided with a humidity plug conforming to SAE-AS26860 Type II (see 6.2). The provision shall allow for a hermetic seal between the drum body and the indicator plug (see 4.6.4.1).

3.5 Performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

3.5.1 Drum leakage. Drums shall show no leaks when tested in accordance with first article and quality conformance testing as defined by paragraphs 4.5.2 and 4.6.

3.5.2 Rough handling. Drums must be able to withstand all tests in 4.5.3.

3.5.3 Cover fit. The drum shall show no sign of leakage after removing and replacing the cover on the loaded drums, which was subjected to the rough handling test (4.5.3) and the cover fit test (4.5.4).

3.6 Finish. See 4.5.6 and 4.6.4.1.

3.6.1 Class A drums. Aluminum alloy components of the class A drums shall be anodized on all surfaces in accordance with MIL-PRF-8625. All exterior aluminum surfaces of the drums shall be coated with not less than one dry film coat of zinc chromate primer conforming to TT-P-1757, Type I, Class C of thickness between 0.0006 and 0.0009 inches, and 0.0005 inches thick of standard corrosion inhibiting enamel, color number 24084, SAE AMS-STD-595. The closure device, if made from steel, shall be finished as specified in 3.6.2 for class S drums.

3.6.2 Class S drums (also steel closure device of class A drums). Unless otherwise specified, (see 6.2) coat all interior and exterior surface finishes of the drum and component parts, except the closing bolt and gasket, with a rust inhibiting coating that withstands salt spray test requirements (see 3.6.4.2 and 4.5.6.2). The color and finish shall be in accordance with color number 24084, SAE AMS-STD-595.

3.6.3 Flexibility. The protective coatings of all class drums shall not crack when tested in accordance with 4.5.5 and 4.6.4.1.

3.6.4 Salt spray. See 4.5.6.

3.6.4.1 Class A drum. All specimens shall be examined after 192 hours of salt spray and shall show no wrinkling or blistering of enamel. The sample exhibiting the greatest degree of softening shall be indistinguishable with regard to hardness and adhesion of enamel, from samples prepared by the same process but not subjected to the salt spray test. For the remaining samples, the primer shall exhibit no blistering or lifting of the coating or substrate corrosion after completion of the 1000 hours of salt spray testing.

3.6.4.2 Class S drum. Results of the salt spray test examination after 192 hours shall show no rust creepage, blistering, undercutting, or loss of adhesion of the paint beyond 0.125 inch of the scribe mark. All other surfaces of the test specimens shall show no more than a trace of film failure, (Rust Grade 9 of ASTM D610), with none larger than 1 mm (0.047 inch) in diameter.

3.7 Marking. The drum bodies shall be marked in accordance with MIL-STD-130 and shall be marked, stamped, stenciled, or painted with waterproof ink or paint in 0.3750 inch letters as follows:

When the drum is assembled, the marking shall appear approximately three quarters of an inch below the lower edge of the locking ring. The color of the ink or paint shall conform to color No. 23538 of SAE AMS-STD-595. The cover and the bottom of the drum shall be embossed in accordance with figure 1 (see 4.6.4.1).

3.8 Workmanship. Workmanship shall be of such quality that the finished drum shall have no sharp burrs or rough surfaces. The metal and forming of metal shall be free of defects which may affect the durability, strength, or serviceability of the drum. The drum, including all components, shall be manufactured in such a manner that when tested in accordance with tests specified herein, there shall be no dents or deformation of the lower portion of the drum exceeding 0.50 inch in depth; no separation of the bottom or side seams of formed drums; dents in the top, bottom, or sides of the drawn or formed drums. Paint shall be applied in a uniform manner and shall be of specified thickness. The locking ring and its required accessories shall also have no denting or deformation that hinders its performance (see 4.6.2 and 4.6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

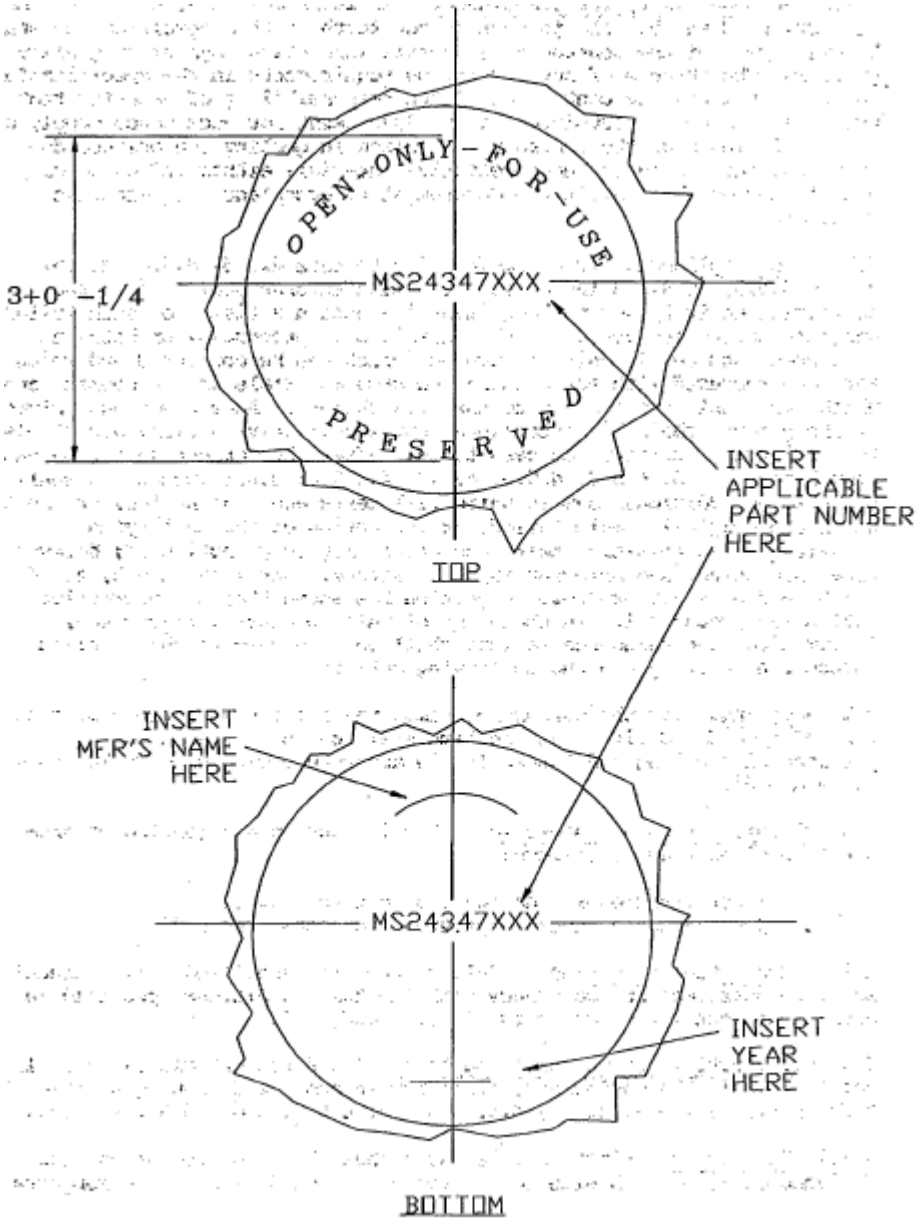


FIGURE 1. DRUM-COVER AND BOTTOM MARKINGS

4. VERIFICATION

4.1 Sampling. For the purpose of sampling, all drums of the same size and type offered for delivery at one time shall be considered a lot for purposes of sampling and inspection in accordance with ASQ Z1.4 (see 3.2 and 4.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Conformance inspection (see 4.6).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in the applicable test method document or the applicable paragraph(s) in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

4.4 First article examination and tests. The first article tests shall consist of all the conformance tests herein and the following additional tests in 4.5.1, 4.5.3, 4.5.4, 4.5.5, 4.5.6, 4.5.7 (see 3.3) and if specified 4.5.2.

4.4.1 Test drums. First article tests shall be conducted using five finished drums of each size to be produced. One drum shall be subjected to the hydrostatic pressure test described in 4.5.1. Each of the four remaining drums shall be subjected to the air leak test in the rough handling test in 4.5.3, and the cover fit test in 4.5.4 (see 3.3).

4.4.2 Test specimens. Two specimen test panels shall be prepared and tested for flexibility as specified in 4.5.5.

4.5 Test methods. See 3.5 for requirements.

4.5.1 Hydrostatic pressure test. A suitable water connection shall be installed in the drum or cover selected for test, and the drum filled with water temperature equal to or greater than surrounding temperature. The cover of ring closure drums shall then be sealed on the drum by applying a torque of 4 ± 0.50 ft-lbs. to the closure bolt, tapping the locking ring repeatedly during application of the above torque. Where use is made of a device which encircles the locking ring and applies pressure uniformly about the circumference of the ring, the closure shall be effected by tightening of the bolt and nut after uniform pressure is applied at all points about the ring. After the exterior of the drum is thoroughly dry, apply a water pressure of 4 psi to the inside of each drum through the water connection for a period of not less than 5 minutes. Evidence of water on the exterior of the drum shall be cause for rejection.

4.5.2 Air leak test. Each of the four drums to be tested shall have an air connection installed, and for the testing described in paragraph 4.5.3, shall be loaded with a dummy load, braced and cushioned in such a manner as to prevent damage to the drum by shifting of the dummy load. The net weight of the load, including bracing and cushioning material, shall be as listed in Table I. The dummy test load shall be constructed in accordance with 4.5.6. After loading, the drum shall be closed as specified in 4.5.1. Air shall then be forced into the drum until the gage pressure is 4 psi. Without reducing the pressure, the drum shall be tested in water in such a manner that the area being tested is covered by one inch or more of water. The drum shall then be observed for leaks as evidenced by the presence of air bubbles. Evidence of air bubbles caused by leaking air will be cause for rejection (see 3.5.1).

TABLE I. Load.

Size No.	Net load-bracing and cushioning included (lbs.)
1	5
2	8
3	8
4	8
5	8
6	8
7	8
8	8

4.5.3 Rough handling test. The drums which were subjected to the loaded drum air leak test shall be vertically quartered by marking with a chalk or crayon. Each drum shall then be dropped 8 times in a free fall manner from 30 inches so that it strikes a concrete or steel floor where the quartering lines coincide with the circumference of the top and bottom so that, upon impact, the center of gravity of the container is directly above the point of impact. After each of the 8 drops, the drum shall be allowed to come to rest of its own volition. After the final drop, the drum shall be checked for leaks in accordance with 4.5.2 (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

4.5.3.1 Test load. The test load shall consist of wooden disks; metal disks, or a combination of each, having the net weight as specified in Table I including bracing and cushioning material. The load shall be rigidly assembled and evenly positioned in the test container using cushioning material conforming to PPP-C-1120, type IV. The dimensions of the test load for the load weight specified shall be such that the cushioning material used will not experience excessive compression set after repeated impacting. Use of other cushioning materials must be approved by the procuring activity.

4.5.4 Cover fit. After the tests specified in 4.5.3 have been completed, the drums shall be opened, reclosed, and retested in accordance with 4.5.3.

4.5.5 Flexibility of coating. Two test specimens shall be prepared from the same material as used for the production drum bodies. The test panels shall be 3 ± 0.25 inch in width by 5 ± 0.25 inch in length. The panels shall be cleaned and dried and the protective coating applied as specified in 3.6.1, 3.6.2 and cured. If curing is accomplished by heat, the panels shall be cooled to the test temperature of 80 ± 10 degrees Fahrenheit (F). The cured panels shall be placed over a 0.250 inch mandrel, held firmly by suitable supports at a point equally distant from the top and bottom edges of the panel, and rapidly (about 1 second) bent double. The panels shall be maintained at 80 ± 10 degrees F during the bending operation. A 7-power lens shall be used to examine the outer surface of the bent panels for evidence of cracking of the protective coating. If any cracks are detected, three additional panels shall be tested as above. If these panels also show cracks in the coating, the enamel shall be discarded and a new batch selected for testing.

4.5.6 Salt spray test.

4.5.6.1 Class A drums. Three specimens measuring 4 x 6 inches shall be finished front and back using the identical finishing process used in finishing the end production drums. This test shall be performed in accordance with ASTM B117. Carefully score the samples through to the anodized layer with two intersecting lines near the middle of the sample. Place all samples in the salt spray for 192 hours, then examine for blistering. The most severe example of blistering shall be let to air dry, the remaining samples then returned to continue the salt spray until 1000 hours have been achieved and examined in accordance with 3.6.4.1.

4.5.6.2 Class S drums. Three specimens measuring 4 x 6 inches shall be finished front and back using the identical finishing process used in finishing the end item drums. These samples shall be air dried a minimum of 96 hours then scored front and back using a sharp instrument which will bevel the finish 30 degrees each side of the score line, through to bare metal. The scoreline shall be continuous for a total of 4 inches. These specimens shall be subjected to salt spray tests in accordance with ASTM B117 utilizing a 5 percent salt solution at 120 degrees F for a minimum exposure time of 192 hours. Results of the test shall be evaluated for conformity with the requirements of paragraph 3.6.4.2.

4.5.7 For Class S drums. For the steel conforming to ASTM A1008/A1008M, test the mechanical properties listed in section 8 of the standard and have the chemical composition specified. For the steel conforming to ASTM A109/A109M test according to section 7 of its applicable standard (see 3.3.2).

4.6 Conformance inspection.

4.6.1 Sampling for inspection. A random sample of drums shall be selected from each lot offered to the Government in accordance with ASQ Z1.4 at inspection level S-4. When ASQ Z1.4 specifies an action by the Government, it shall at the option of the Government be performed either by the Government or by the contractor under supervision of Government inspectors. Samples selected shall be subjected to the visual and dimensional inspection described in 4.6.2 (see 3.2).

4.6.2 Visual and dimensional examination. Each of the sample drums selected in accordance with 4.6.1 shall be visually and dimensionally inspected to verify compliance with the requirements of this specification and MS24347. Any drum in the sample containing one or more dimensional and requirements defect, shall be considered a defective unit (see 3.4 and 4.6.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

4.6.3 Leakage test. Each of the sample drums selected in accordance with 4.6.1 shall have an air connection installed in place of the cover and a minimum of 4 psi air pressure applied. The side seam shall be coated with a bubble supporting solution while the bottom chime rests in enough bubble supporting solution to cover the chime. Evidence of air bubbles caused by leaking air shall be cause for rejection.

4.6.4 Inspection. Inspection may be made throughout the entire process of manufacture.

4.6.4.1 Visual inspection. Visual inspection for each class of drums shall be in accordance with the classification of defects in Table II.

4.6.4.1.1 Dimensional examination. Examination shall be made of the end item to determine compliance with dimensional requirements. Any dimension not within specified tolerance shall be classified as a defect.

TABLE II. Classification of defects.

Examine	Defects	Required Paragraph	Method Paragraph	Major	Minor
Finish	Not Specified Paint or Primer	3.6	4.6.4	x	
	Paint Cracks or Flake	3.6	4.6.2	x	
	Color Not as Specified	3.6	4.6.2		x
	Enamel Tacky, Blistered or Peeling	3.6	4.6.2		x
	Dirty, Rust, Grit or Foreign Matter Bedded in Enamel	3.6	4.62		x
	Area of Thin or No Primer, Film	3.6	4.6.2	x	
Construction & Workmanship	Sharp Edges and Metal Splinters	3.8	4.6.2	x	
	Component Fractured, Split, Bowed, or Malformed Affecting Serviceability	3.8	4.6.2	x	
	Sealing Surface Smooth	3.8	4.5.4	x	
	Seaming Compound (of formed drums) on Interior, Exterior Surfaces	3.8	4.6.2		x
	Sharp Burr, Sliver, or Splinter That Can Cause Injury	3.8	4.6.2	x	
	Missing, Incomplete, Burn Holes, Cracked	3.8	4.6.2, 4.6.3	x	
Locking Ring	Incomplete	3.4.2	4.6.2	x	
	Wrong Size	3.4.2	4.6.2	x	
	Bolts or Nuts Wrong Size or Stripped	3.4.2	4.6.2	x	
	Ring Dented or Lugs Bent	3.4.2	4.6.2	x	
	Tamper-Proof Locking Ring Missing or Damaged	3.4.2	4.6.2	x	
	Nut and Bolts Not Assembled to Locking Ring. Nuts Loose.	3.4.2	4.6.2		x

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects. Cont'd

Examine	Defects	Required Paragraph	Method Paragraph	Major	Minor
Assembly	Any Component Which Does Not Fit Properly or Assembled as Specified	3.3, 3.4, 3.5, 3.7, 3.8	4.6, 4.7	x	
	Humidity Indicator, if Specified	3.4.3	4.6.2	x	
Marking	Missing, Incomplete, Not Legible, or Not Any Specific Type or Size Specific Type or Size	3.7	4.6.2	x	
Materials	Not as Specified	3.3, 3.4	4.6.2		x

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of material is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contracting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The metal drums covered by this specification are intended to be used for storage and shipment of military material.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Quantity
c. Part number (see MS24347 and 1.2).
d. When first article inspection, sample and tests are required (see 3.2, 4.4 and 6.3).
e. Provision for indicator plug type (see 3.4.3).
f. Specified coating if different from 3.6.2.
g. Packaging requirements (see 5.1).

6.3 First article. When a first article inspection is required, the item(s) should be a first production item. The first article should consist of five unit(s). The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of the first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to reply on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.

6.4 Disposability. One or more of the following methods should be used to accomplish disposal of metal drum or components: reuse, recycling, baling, sanitary landfill, composting, incineration, pyrolysis, or sea disposal.

6.5 Metric. MS24347 Table III shows metric conversion for measurements used in this specification. Rounding of values to the minimum number of significant digits that will maintain the required accuracy is permitted. See IEEE/ASTM SI10 American National Standard for Metric Practice, for conversion information.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.7 Subject Term (key Word) Listing:

Aluminum Alloy Drum
Formed Drum
Dome Cover
Drawn Drum
Recessed Cover
Steel Drum

Custodians:
Army - GL
Navy - SA
Air Force - 84
DLA - CQ

Preparing activity:
DLA - CQ

(Project 8110-2026-001)

Review activities:
Army - AR, EA, SM
Navy - OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:07Z
Check the source to verify that this is the current version before use.