
FSC 5306

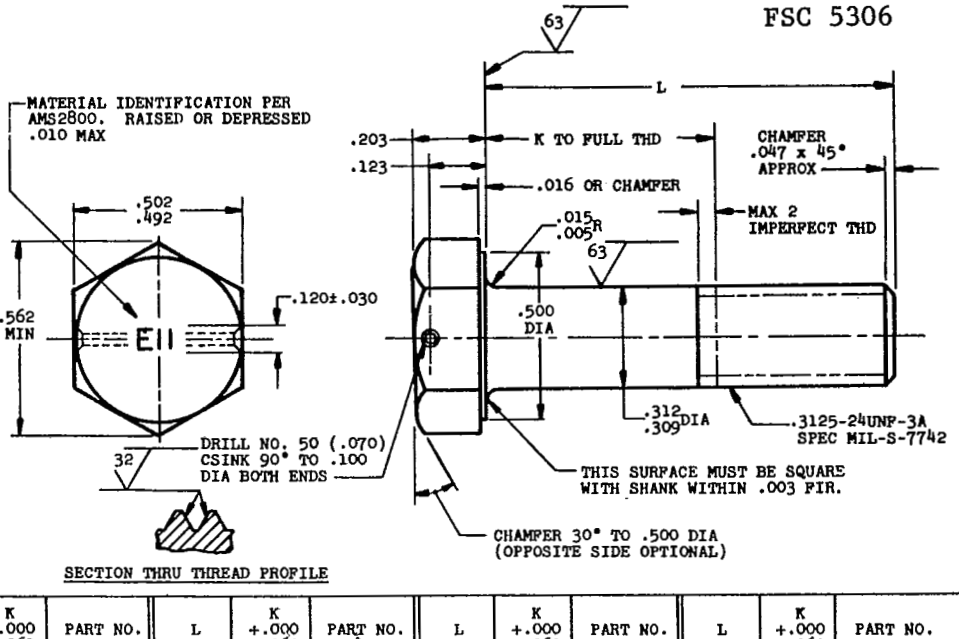

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.312	.438	AN103019	2.500	1.625	AN103033	4.250	3.375	AN103047
.500	(a)	AN103006	1.375	.500	AN103020	2.625	1.750	AN103034	4.375	3.500	AN103048
.562	(a)	AN103007	1.438	.562	AN103021	2.750	1.875	AN103035	4.500	3.625	AN103049
.625	(a)	AN103008	1.500	.625	AN103022	2.875	2.000	AN103036	4.625	3.750	AN103050
.688	(a)	AN103009	1.562	.688	AN103023	3.000	2.125	AN103037	4.750	3.875	AN103051
.750	(a)	AN103010	1.625	.750	AN103024	3.125	2.250	AN103038	4.875	4.000	AN103052
.812	(a)	AN103011	1.688	.812	AN103025	3.250	2.375	AN103039	5.000	4.125	AN103053
.875	(a)	AN103012	1.750	.875	AN103026	3.375	2.500	AN103040	5.125	4.250	AN103054
.938	(a)	AN103013	1.812	.933	AN103027	3.500	2.625	AN103041	5.250	4.375	AN103055
1.000	.125	AN103014	1.875	1.000	AN103028	3.625	2.750	AN103042	5.375	4.500	AN103056
1.062	.188	AN103015	2.000	1.125	AN103029	3.750	2.875	AN103043	5.500	4.625	AN103057
1.125	.250	AN103016	2.125	1.250	AN103030	3.875	3.000	AN103044	5.625	4.750	AN103058
1.188	.312	AN103017	2.250	1.375	AN103031	4.000	3.125	AN103045	5.750	4.875	AN103059
1.250	.375	AN103018	2.375	1.500	AN103032	4.125	3.250	AN103046	5.875	5.000	AN103060
									6.000	5.125	AN103061

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .015 FIR.

MATERIAL: STEEL AMS6322

HARDNESS: ROCKWELL C26-32

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452 PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

(5) CANCELED AS OF 9 OCT 87

(3) **INACTIVE FOR NEW DESIGN AFTER** 3 MARCH 1969 **NO SUPERSEDING STANDARD.**

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 8 June 49 REVISED (1) 31 Aug 54 (2) 19 Sep 55 (3) 3 Mar 69 (5) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN103001 THRU AN103100
	BOLT - DRILLED HEX HEAD, 1 HOLE, .3125-24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24
Check the source to verify that this is the current version before