
FED. SUP CLASS. 5306

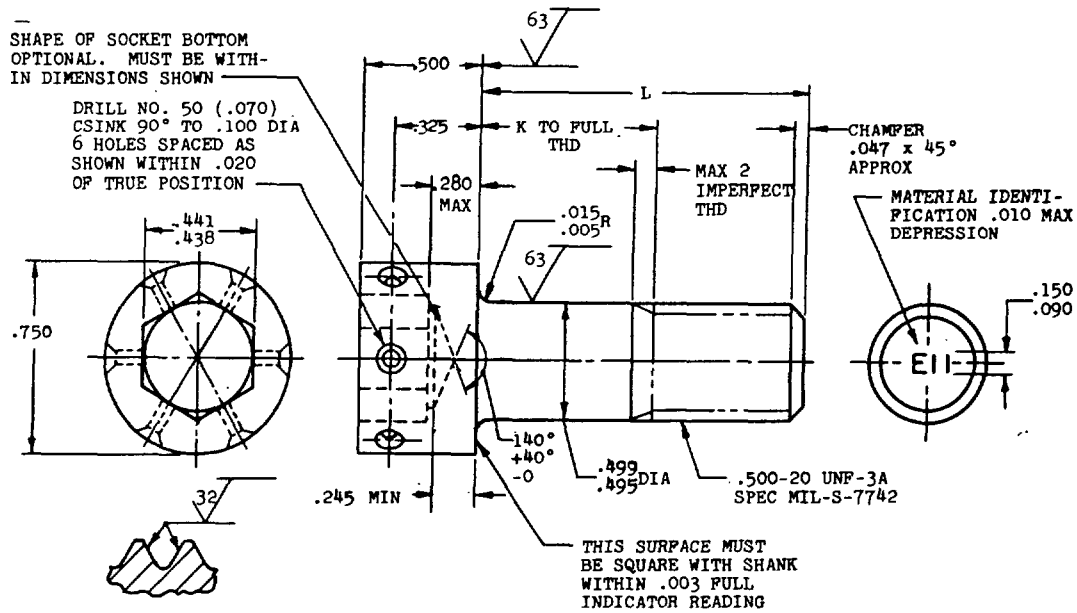

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.812	.562	AN149077	3.125	1.875	AN149091	4.875	3.625	AN149105
1.000	(a)	AN149064	1.875	.625	AN149078	3.250	2.000	AN149092	5.000	3.750	AN149106
1.062	(a)	AN149065	1.938	.688	AN149079	3.375	2.125	AN149093	5.125	3.875	AN149107
1.125	(a)	AN149066	2.000	.750	AN149080	3.500	2.250	AN149094	5.250	4.000	AN149108
1.188	(a)	AN149067	2.062	.812	AN149081	3.625	2.375	AN149095	5.375	4.125	AN149109
1.250	(a)	AN149068	2.125	.875	AN149082	3.750	2.500	AN149096	5.500	4.250	AN149110
1.312	(a)	AN149069	2.188	.938	AN149083	3.875	2.625	AN149097	5.625	4.375	AN149111
1.375	(a)	AN149070	2.250	1.000	AN149084	4.000	2.750	AN149098	5.750	4.500	AN149112
1.438	.188	AN149071	2.375	1.125	AN149085	4.125	2.875	AN149099	5.875	4.625	AN149113
1.500	.250	AN149072	2.500	1.250	AN149086	4.250	3.000	AN149100	6.000	4.750	AN149114
1.562	.312	AN149073	2.625	1.375	AN149087	4.375	3.125	AN149101			
1.625	.375	AN149074	2.750	1.500	AN149088	4.500	3.250	AN149102			
1.688	.438	AN149075	2.875	1.625	AN149089	4.625	3.375	AN149103			
1.750	.500	AN149076	3.000	1.750	AN149090	4.750	3.500	AN149104			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .002 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9093

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jun 49. REVISED ① 7 Jan 53 ② 1 Aug 58 ③ 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for procurement purposes on the date of approval. It is not to be regarded by implication or otherwise after the latest date of approval shown.

PA 11
CUST AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - SOCKET HEAD, 6 HOLES DRILLED, .500-20

AN149051
THRU
AN149150

*U.S. GOVERNMENT PRINTING OFFICE: 1987-751-515/3017

Project No. 5306-1071

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 605-036/43939

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.