
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

User activity:

Review activity:
DLA - IS
NS

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all associated standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

FED. SUP CLASS
5307

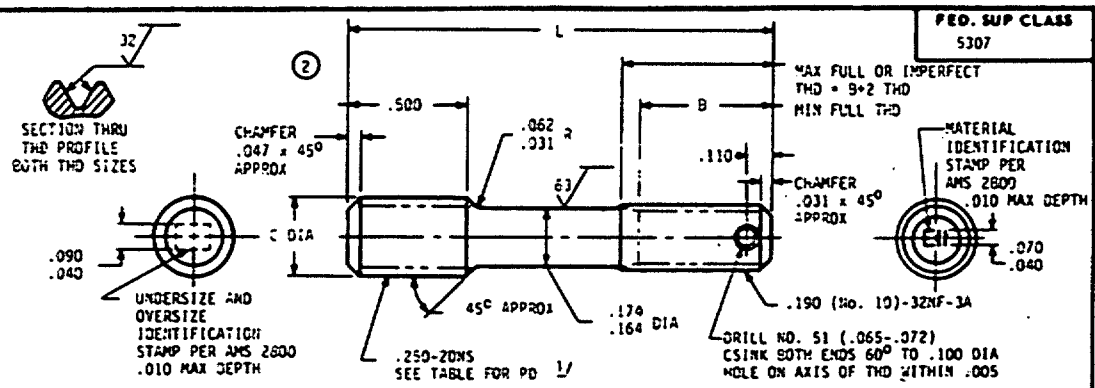

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD (O)	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C 1/		.245- .250	.245- .250	.245- .250	.245- .250	.254- .259	.254- .259
PD BEFORE PLATING		.2183-.2193	.2213-.2223	.2243-.2253	.2273-.2283	.2303-.2313	.2333-.2343
PD AFTER PLATING		.2188-.2203	.2218-.2233	.2248-.2263	.2278-.2293	.2308-.2323	.2338-.2353
PD LEAD THREAD		.2125-.2145	.2155-.2175	.2185-.2205	.2215-.2235	.2245-.2265	.2275-.2295
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.000	.375	AN156819	AN156820	AN156821	AN156822	AN156823	AN156824
1.062	.438	AN156825	AN156826	AN156827	AN156828	AN156829	AN156830
1.125	.500	AN156831	AN156832	AN156833	AN156834	AN156835	AN156836
1.188	.500	AN156837	AN156838	AN156839	AN156840	AN156841	AN156842
1.250	.500	AN156843	AN156844	AN156845	AN156846	AN156847	AN156848
1.312	.500	AN156849	AN156850	AN156851	AN156852	AN156853	AN156854
1.375	.500	AN156855	AN156856	AN156857	AN156858	AN156859	AN156860
1.438	.500	AN156861	AN156862	AN156863	AN156864	AN156865	AN156866
1.500	.500	AN156867	AN156868	AN156869	AN156970	AN156871	AN156872
1.562	.500	AN156873	AN156874	AN156875	AN156876	AN156877	AN156878
1.625	.500	AN156879	AN156880	AN156881	AN156882	AN156883	AN156884
1.688	.500	AN156885	AN156886	AN156887	AN156888	AN156889	AN156890
1.750	.500	AN156891	AN156892	AN156893	AN156894	AN156895	AN156896
1.812	.500	AN156897	AN156898	AN156899	AN156900	AN156901	AN156902

1/ PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

NOTES:
1. MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE ROUGHNESS: AS 107.
5. MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED:
8. TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

(3) CANCELED AS OF 9 OCT 87

(2) REVISED AND REDRAWN

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 10 MAY 50 REVISED (1) 25 MAR 86 (2) 14 OCT 81 (3) 9 OCT 87

P.A. 11	AERONAUTICAL STANDARD	AN156801 THRU AN157100
Critical Cost AV AS	STUD, STEPPED, DRILLED, 2 DIA ENGAGEMENT, .250-20 x .190-32	
PROCUREMENT SPECIFICATION NONE		SHEET 1 OF 1

DISC Form 1299 APR 76

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:27:27
Check the source to verify that this is the current version before use.

Project 5307-0386

PROPOSED 5307-0288