MILITARY SPECIFICATION SHEET

INSULATORS, FEEDTHRU
(STYLE 34)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

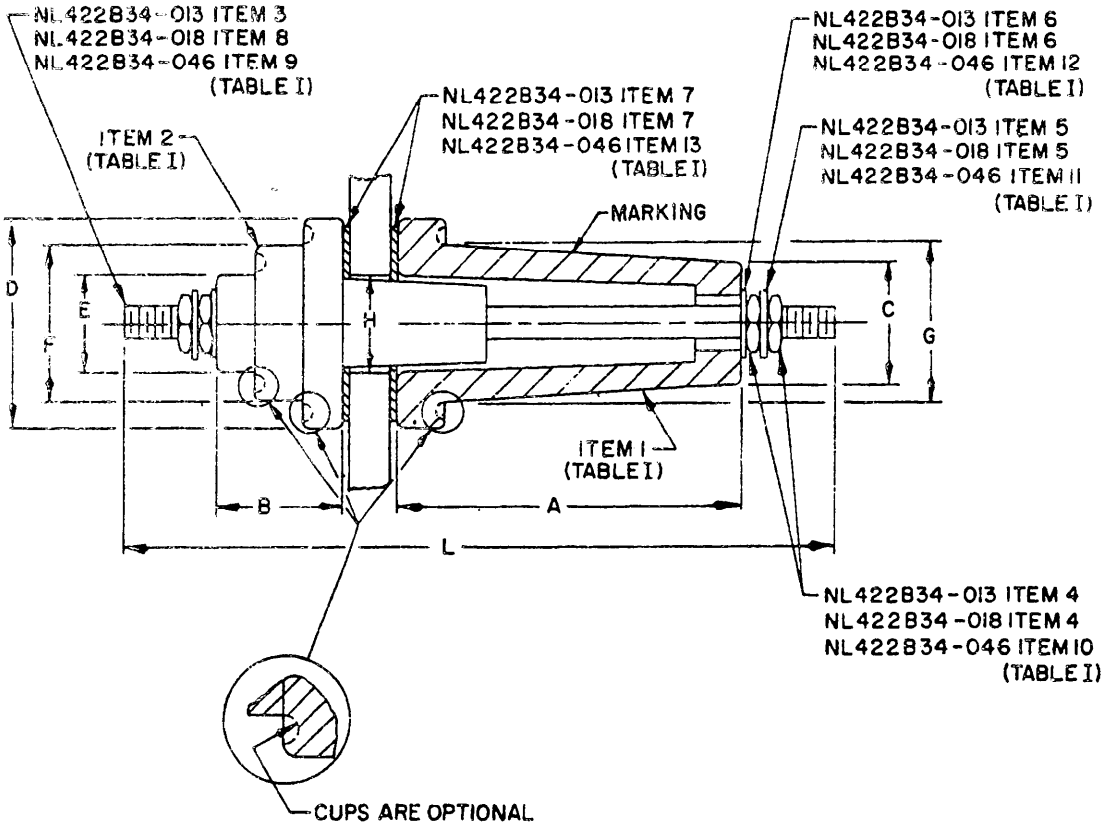


FIGURE 1. Style 34 feedthru insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Insulator, top	Ceramic, grade 422 or better, per MIL-I-10	1
2	Insulator, bottom		1
3	Stud, 6-32UNC-2A, 1.688 in. long	Brass per QQ-B-637; nickel plated	1
4	Hexagon nut, 6-32UNC-2B		4
5	#6 washer		2
6	#6 washer, .031 THK		2
7	Gasket, .625 OD, .312 ID, .031 THK, ±.005	Rubber, type 1, class 1, per MIL-G-1149	2
8	Stud, 6-32UNC-2A, 2.250 in. long	Brass per QQ-B-637; nickel plated	1
9	Stud, 1/4-20UNC-2A, 5.750 in. long		1
10	Hexagon nut, 1/4-20UNC-2B		4
11	1/4 washer		2
12	Washer, .625 OD, .281 ID, .062 THK, ±.005	Lead	2
13	Gasket, 1.562 OD, .688 ID, .062 THK, ±.005	Rubber, type 1, class 1, per MIL-G-1149	2

TABLE II. Type designation.

Type designation	Dimensions 1/								
	A	B	C	D	E	F	G	H	L
NL422B34-013	.625 (15.88)	.312 (7.92)	.375 (9.53)	.688 (17.48)	---	---	.468 (11.89)	.305 (7.75)	1.688 (42.88)
NL422B34-018	.625 (15.88)	.312 (7.92)	.375 (9.53)	.688 (17.48)	---	---	.468 (11.89)	.305 (7.75)	2.250 (57.15)
NL422B34-046	2.750 (69.85)	1.000 (25.40)	.938 (23.83)	1.625 (41.28)	.750 (19.05)	1.187 (30.15)	1.250 (31.75)	.687 (17.45)	5.750 (146.05)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1, table I, and table II.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.020 inch.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0162)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.