MIL-I-23264/14A
8 July 1968
SUPERSEDING
MIL-I-23264/14
13 April 1962

MILITARY SPECIFICATION SHEET

INSULATORS, FEEDTHRU
(STYLES 35 AND 36)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

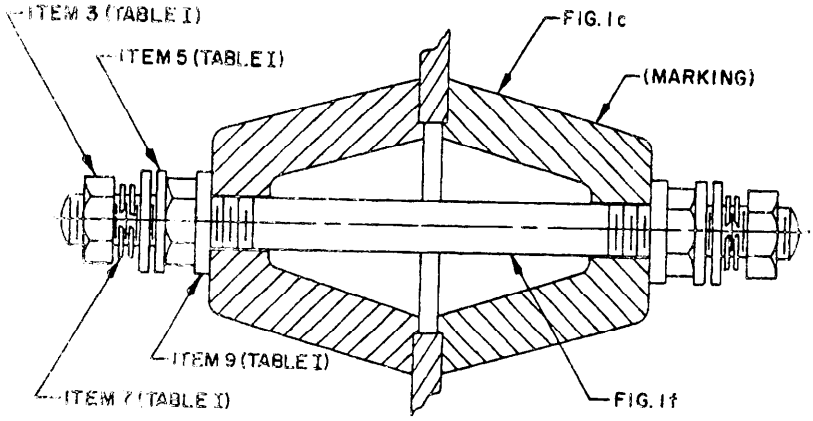


FIGURE 1a. Feedthru insulator assembly (NL422B35-025) (NL422W35-025)

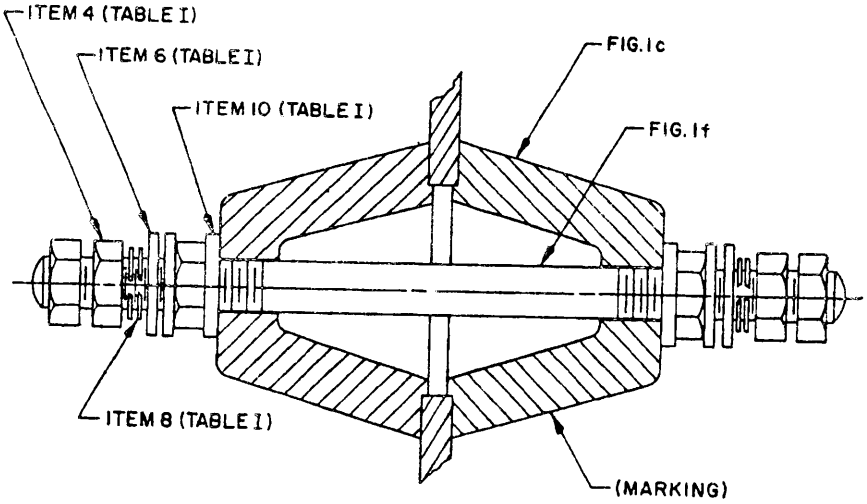


FIGURE 1b. Feedthru insulator assembly (NL422B35-039) (NL422W35-039)

FIGURE 1. Styles 35 and 36 feedthru insulators.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:08Z
Check the source to verify that this is the current version before use.

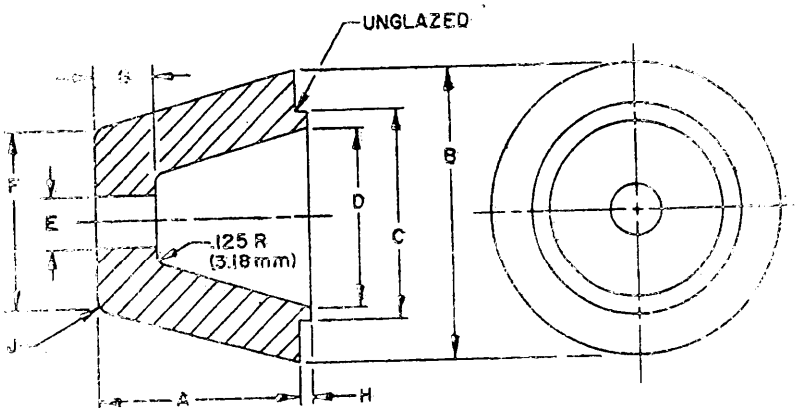


FIGURE 1c. Insulator bowl (NL422B35-039) (NL422W35-039)
(Item 1, Table I)


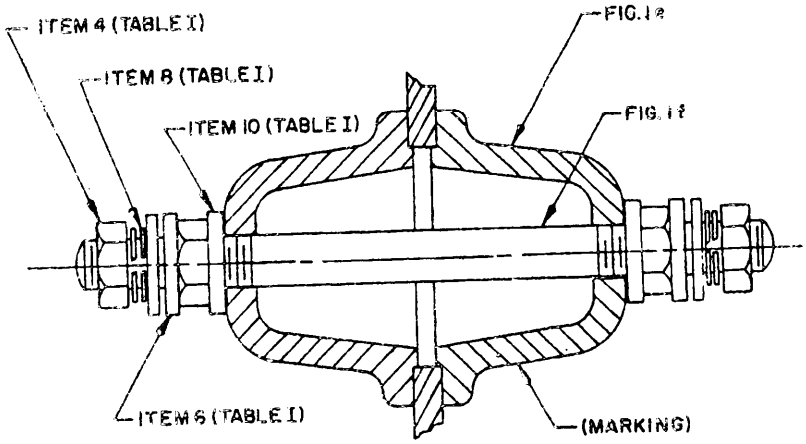


FIGURE 1d. Feedthru insulator assembly (NL422B36-048) (NL422W36-048)

FIGURE 1. Styles 35 and 36 feedthru insulators - (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.

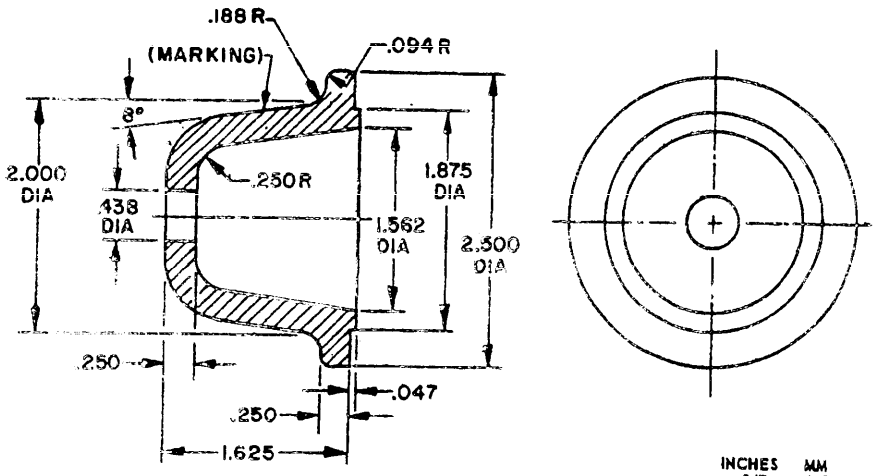

INCHES	MM
.047	1.19
.094	2.39
.188	4.78
.250	6.35
.438	11.13
1.562	39.67
1.625	41.28
1.875	47.63
2.000	50.80
2.500	63.50

FIGURE 1e. Insulator bowl (NL422B36-048) (NL422W36-048)
(item 1, Table I)

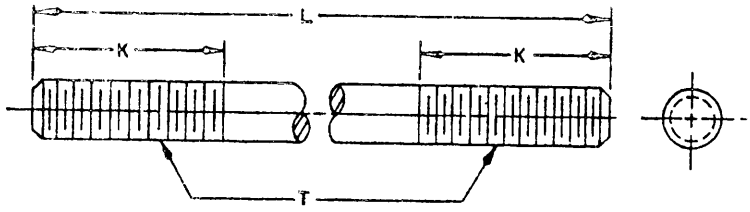


FIGURE 1f. Rod (NL422B35-039 NL422B36-048) (NL422W35-039 NL422W36-048)
(Item 2, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Insulator sleeve for rod may be furnished at the option of the supplier.

FIGURE 1. Styles 35 and 36 feedthru insulators - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:08Z
Check the source to verify that this is the currentversion before use.

TABLE I. Item description.

Item No.	Description	Material 1/	No. per assembly
1	Insulator bowl	Ceramic, grade 422 or better, per MIL-I-10	2
2	Rod	Brass, composition 1, hard, per QQ-B-637	1
3	Hexagon nut, 10-32UNF-2B		4
4	Hexagon nut, 1/4-20UNC-2B		6 (NL422B35-039) (NL422W35-039) 4 (NL422B36-048) (NL422W36-048)
5	Washer per MS15795-908		4
6	Washer per MS15795-910		4
7	Lockwasher per MS35338-43	Steel per QQ-S-324 or QQ-S-633	4
8	Lockwasher per MS35338-44		4
9	Washer, .437 OD, .218 ID, .062 THK ± .005	Lead	2
10	Washer, .625 OD, .281 ID, .062 THK ± .005	Lead	2

1/ All brass parts shall be nickel plated per type V (FC) of QQ-N-290.

TABLE II. Type designation.

Type designation	Dimensions 1/											
	A	B	C	D	E	F	G	H	J	K	L	T
NL422B35-025 NL422W35-025	.875 (22.23)	1.250 (31.75)	.750 (19.05)	.562 (14.27)	.203 (5.16)	.500 (12.70)	.250 (6.35)	.032 (.81)	.093 (2.36)	.750 (19.05)	3.125 (79.38)	#10-32UNF-2A
NL422B35-039 NL422W35-039	1.125 (28.58)	1.750 (44.45)	1.250 (31.75)	1.000 (25.40)	.265 (6.73)	.875 (22.23)	.437 (11.10)	.062 (1.57)	.125 (3.18)	1.250 (31.75)	4.938 (125.43)	1/4-20UNC-2A
NL422B36-048 NL422W36-048	See figure 1e									1.500 (38.10)	6.000 (152.40)	1/4-20UNC-2A

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1, table I, and table II.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ± .020 inch. Tolerance on angles shall be ± 1°.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - 50

(Project 5962-0163)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.