MIL-I-23264/15A
8 July 1968
SUPERSEDING
MIL-I-23264/15
13 April 1962

MILITARY SPECIFICATION SHEET

INSULATORS, FEEDTHRU
(STYLE 37)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

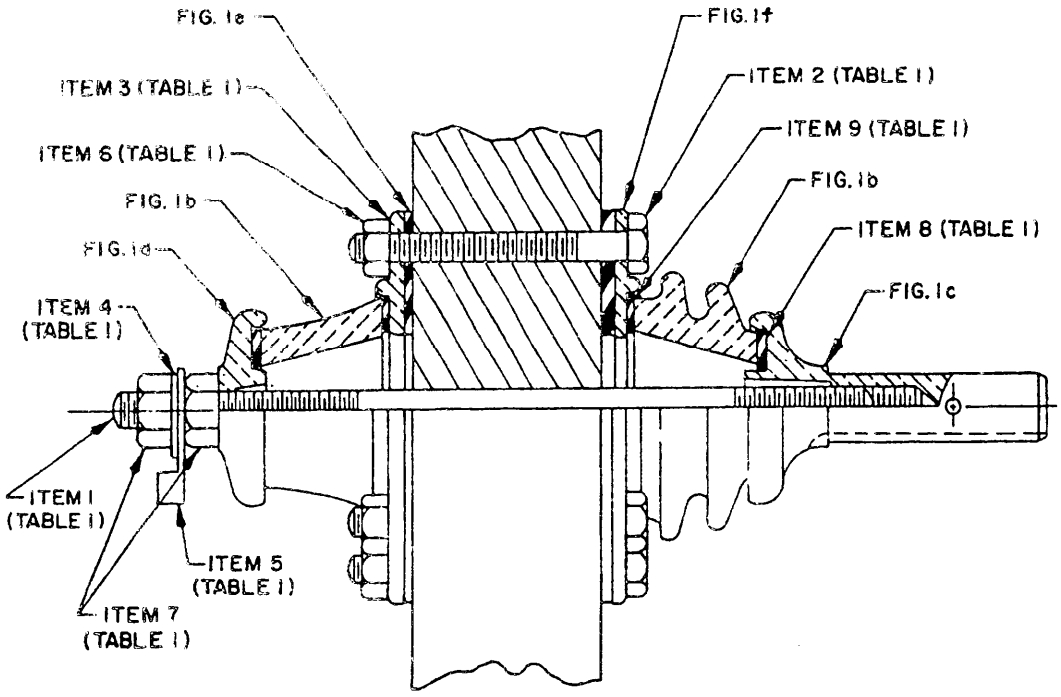


FIGURE 1a. Feedthru insulator assembly.

FIGURE 1. Style 37 feedthru insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:08Z
Check the source to verify that this is the current version before use.

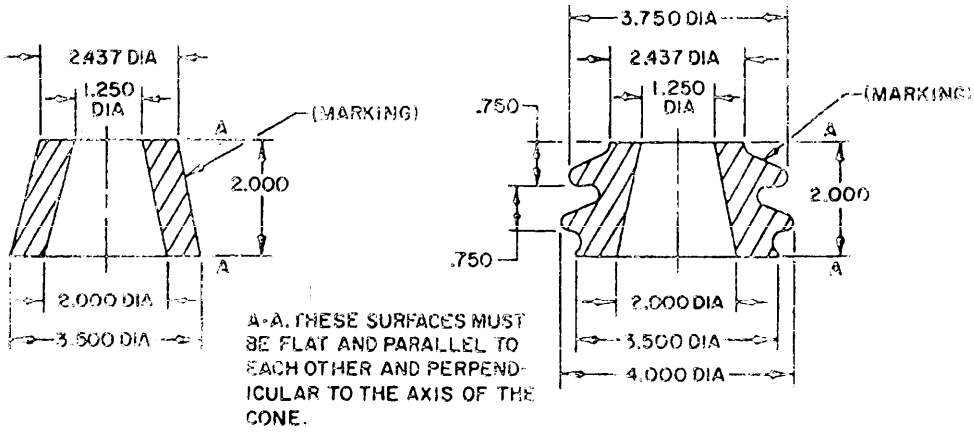


FIGURE 1b. Insulators.
(Items 10 & 11, Table I)


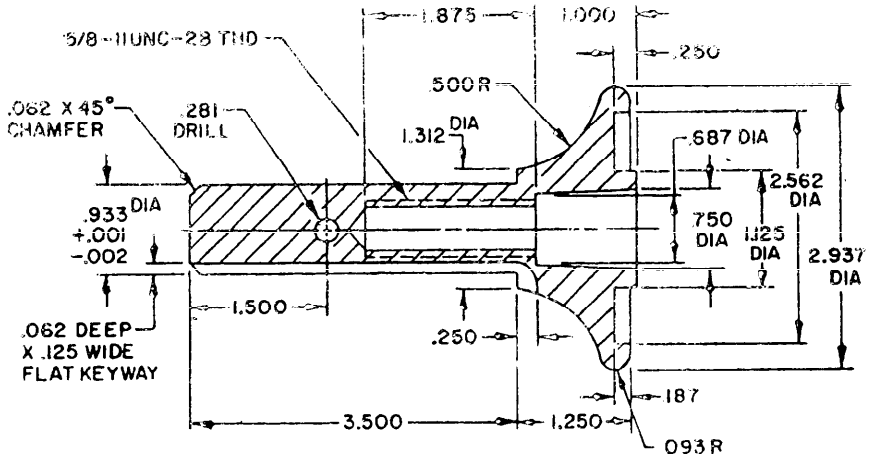


FIGURE 1c. Upper cap.
(Item 12, Table I)

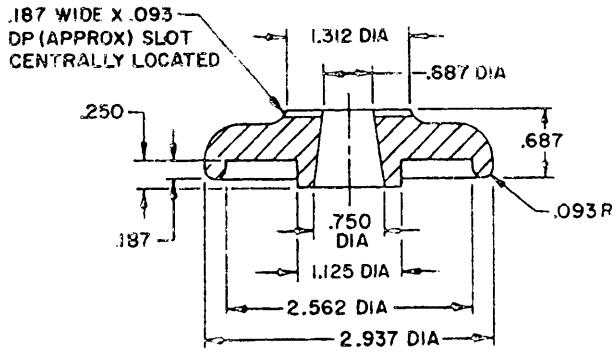

INCHES	MM
.001	.03
.002	.05
.062	1.57
.093	2.36
.125	3.18
.187	4.75
.250	6.35
.281	7.14
.500	12.70
.687	17.45
.750	19.05
.933	23.70
1.000	25.40
1.125	28.58
1.250	31.75
1.312	33.32
1.500	38.10
1.875	47.63
2.000	50.80
2.437	61.90
2.562	65.07
2.937	74.60
3.500	88.90
3.750	95.25
4.000	101.60

FIGURE 1d. Lower cap.
(Item 14, Table I)

FIGURE 1. Style 37 feedthru insulators. - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:08Z
Check the source to verify that this is the current version before use.

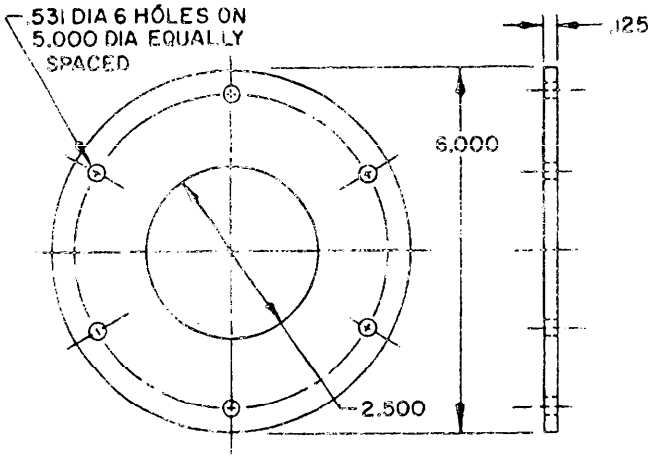


FIGURE 1e. Gasket.
(Item 15, Table I)

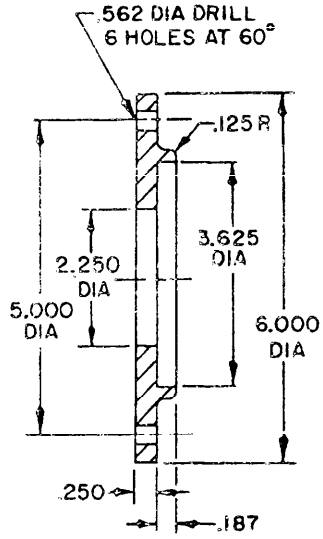


FIGURE 1f. Flange.
(Item 13, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

INCHES	MM
.125	3.18
.187	4.75
.250	6.35
.531	13.49
.562	14.27
2.250	57.15
2.500	63.50
3.625	92.08
5.000	127.00
6.000	152.40

FIGURE 1. Style 37 feedthru insulator. - Continued.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Stud, .625 DIA x 12.0 LG, 2.5 threaded one end, 4.5 threaded other end, 5/8-11UNC-2A both ends	Brass, composition 2, per QQ-S-637; cadmium plated, type II, class 3, per QQ-P-416	1
2	Hexagon cap screw, 1/2-13UNC-2A, 4 in. long, per MS35307-123		6
3	Lockwasher per MS35338-143 or -162		6
4	Lockwasher per MS35338-107		1
5	Terminal lug, Amp. Inc. #35669 or equal	Copper, hot electro tinned	1
6	Hexagon nut, 1/2-13UNC-2B, per MS35690-810		6

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.

TABLE I. Item description (continued).

Item No.	Description	Material	No. per assembly
7	Hexagon nut, 5/8-11UNC-2B, per MS35690-1011		2
8	Gasket, 2.375 OD, 1.250 ID, .062 THK, ±.005	Rubber, type I, class 1, per MIL-G-1149	2
9	Gasket, 3.500 OD, 2.250 ID, .062 THK, ±.005	Rubber, type I, class 1, per MIL-G-1149	2
10	Insulator bowl, upper	Ceramic, grade 222 or better, per MIL-I-10	1
11	Insulator bowl, lower	Ceramic, grade 222 or better, per MIL-I-10	1
12	Cap, upper	Brass per QQ-B-637; or bronze per QQ-L-225	1
13	Flange	Brass per QQ-B-637; or bronze per QQ-L-225	2
14	Cap, lower	Brass per QQ-B-637; or bronze per QQ-L-225	1
15	Gasket	Rubber, type I, class 2, per MIL-G-1149	2

TABLE II. Type designation.

Type designation	Dimensions
NL222B37-111 NL222W37-111	See figure 1

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.005 inch. The tolerance on angles shall be ±1°.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 222 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0184)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.