MILITARY SPECIFICATION SHEET

INSULATORS, BUSHING
(STYLES 40, 41, AND 42)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

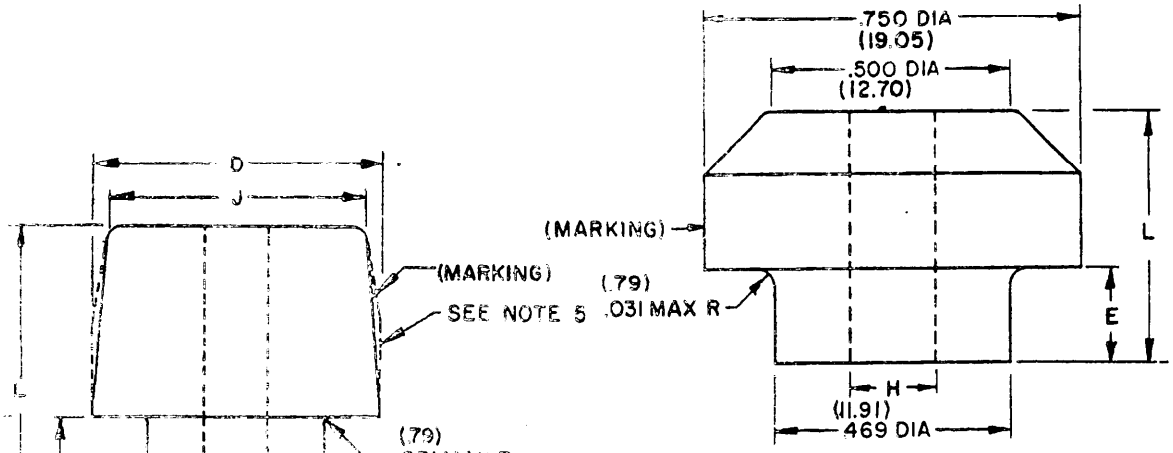


FIGURE 1a. Style 40.

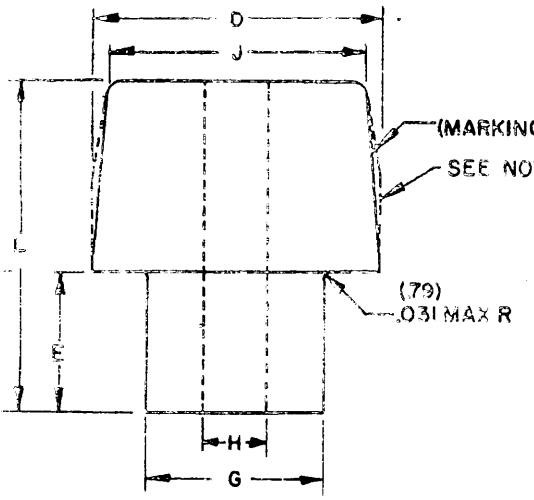


FIGURE 1b. Style 41.

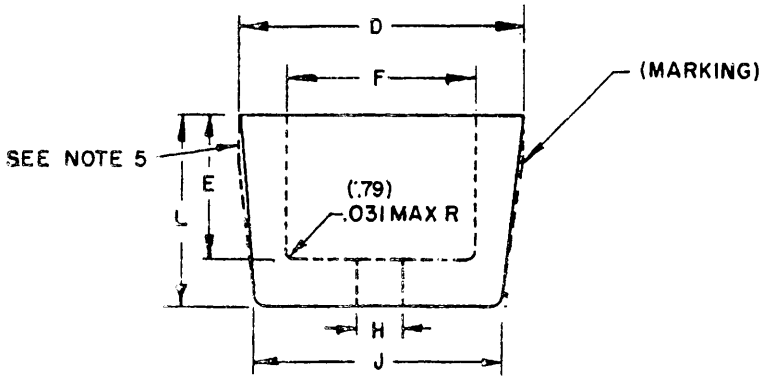


FIGURE 1c. Style 42.

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.
4. Styles 41 and 42 are matched pairs.
5. Optional shape. Cylindrical sides shall not exceed 25 percent of length.

FIGURE 1. Styles 40, 41, and 42 bushing insulators.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation.

Type designation	Dimensions 1/						
	D	E	F	G	H	J	L
NL422B40-001 NL422W40-001	---	.050 (1.27)	---	---	.173 (4.39)	---	.425 (10.80)
NL422B40-002 NL422W40-002	---	.050 (1.27)	---	---	8-32UNC-2B Tap	---	.425 (10.80)
NL422B40-003 NL422W40-003	---	.125 (3.18)	---	---	.200 (5.08)	---	.438 (11.13)
NL422B40-004 NL422W40-004	---	.188 (4.78)	---	---	.173 (4.39)	---	.500 (12.70)
NL422B41-001 NL422W41-001	.500 (12.70)	.250 (6.35)	---	.234 (5.94)	.143 (3.63)	.375 (9.53)	.625 (15.88)
NL422B41-002 NL422W41-002	.625 (15.88)	.250 (6.35)	---	.344 (8.74)	.156 (3.96)	.500 (12.70)	.625 (15.88)
NL422B41-003 NL422W41-003	.875 (22.23)	.375 (9.53)	---	.469 (11.91)	.200 (5.08)	.750 (19.05)	.875 (22.23)
NL422B41-004 NL422W41-004	1.125 (28.58)	.562 (14.27)	---	.703 (17.86)	.200 (5.08)	1.000 (25.40)	1.312 (33.32)
NL422B42-001 NL422W42-001	.500 (12.70)	.250 (6.35)	.250 (6.35)	---	.143 (3.63)	.375 (9.53)	.375 (9.53)
NL422B42-002 NL422W42-002	.625 (15.88)	.250 (6.35)	.375 (9.53)	---	.156 (3.96)	.500 (12.70)	.375 (9.53)
NL422B42-003 NL422W42-003	.875 (22.23)	.375 (9.53)	.500 (12.70)	---	.200 (5.08)	.750 (19.05)	.500 (12.70)
NL422B42-004 NL422W42-004	1.125 (28.58)	.562 (14.27)	.750 (19.05)	---	.200 (5.08)	1.000 (25.40)	.750 (19.05)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0165)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:08Z
Check the source to verify that this is the current version before use.