MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLES 01, 02, 03, 04, AND 06)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

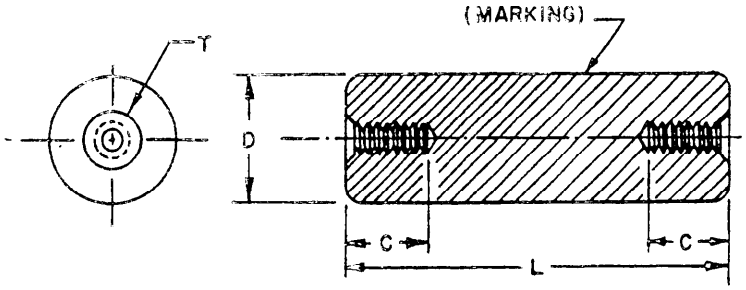


FIGURE 1a. Styles 01, 02, 03, 04.

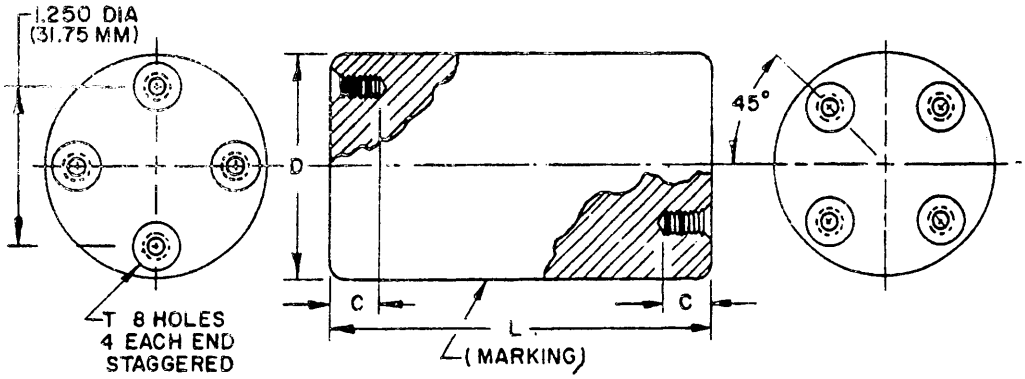


FIGURE 1b. Style 06.

NOTES:
1. All dimensions are in inches.

FIGURE 1. Styles 01, 02, 03, 04, and 06 standoff insulators.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation.

Type designation	Dimensions 1/			
	C	D	L	T
NL422B01-004 NL422W01-004	.156 (3.96)	.375 (9.53)	.500 (12.70)	6-32UNC-2B
NL422B01-005 NL422W01-005	.188 (4.78)	.375 (9.53)	.625 (15.88)	6-32UNC-2B
NL422B01-006 NL422W01-006	.250 (6.35)	.375 (9.53)	.750 (19.05)	6-32UNC-2B
NL422B01-008 NL422W01-008	.375 (9.53)	.375 (9.53)	1.000 (25.40)	6-32UNC-2B
NL422B01-010 NL422W01-010	.375 (9.53)	.375 (9.53)	1.250 (31.75)	6-32UNC-2B
NL422B01-012 NL422W01-012	.375 (9.53)	.375 (9.53)	1.500 (38.10)	6-32UNC-2B
NL422B01-016 NL422W01-016	.375 (9.53)	.375 (9.53)	2.000 (50.80)	6-32UNC-2B
NL422B02-005 NL422W02-005	.188 (4.78)	.500 (12.70)	.625 (15.88)	8-32UNC-2B
NL422B02-006 NL422W02-006	.250 (6.35)	.500 (12.70)	.750 (19.05)	8-32UNC-2B
NL422B02-008 NL422W02-008	.375 (9.53)	.500 (12.70)	1.000 (25.40)	8-32UNC-2B
NL422B02-010 NL422W02-010	.375 (9.53)	.500 (12.70)	1.250 (31.75)	8-32UNC-2B
NL422B02-012 NL422W02-012	.375 (9.53)	.500 (12.70)	1.500 (38.10)	8-32UNC-2B
NL422B02-016 NL422W02-016	.375 (9.53)	.500 (12.70)	2.000 (50.80)	8-32UNC-2B
NL422B02-020 NL422W02-020	.375 (9.53)	.500 (12.70)	2.500 (63.50)	8-32UNC-2B
NL422B02-024 NL422W02-024	.375 (9.53)	.500 (12.70)	3.000 (76.20)	8-32UNC-2B
NL422B03-008 NL422W03-008	.375 (9.53)	.750 (19.05)	1.000 (25.40)	10-32UNF-2B

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation (continued).

Type designation	Dimensions 1/			
	C	D	L	T
NL422B03-010 NL422W03-010	.375 (9.53)	.750 (19.05)	1.250 (31.75)	10-32UNF-2B
NL422B03-012 NL422W03-012	.375 (9.53)	.750 (19.05)	1.500 (38.10)	10-32UNF-2B
NL422B03-016 NL422W03-016	.375 (9.53)	.750 (19.05)	2.000 (50.80)	10-32UNF-2B
NL422B03-020 NL422W03-020	.375 (9.53)	.750 (19.05)	2.500 (63.50)	10-32UNF-2B
NL422B03-024 NL422W03-024	.375 (9.53)	.750 (19.05)	3.000 (76.20)	10-32UNF-2B
NL422B03-032 NL422W03-032	.375 (9.53)	.750 (19.05)	4.000 (101.60)	10-32UNF-2B
NL422B04-010 NL422W04-010	.438 (11.13)	1.000 (25.40)	1.250 (31.75)	1/4-20UNC-2B
NL422B04-012 NL422W04-012	.500 (12.70)	1.000 (25.40)	1.500 (38.10)	1/4-20UNC-2B
NL422B04-016 NL422W04-016	.625 (15.88)	1.000 (25.40)	2.000 (50.80)	1/4-20UNC-2B
NL422B04-020 NL422W04-020	.625 (15.88)	1.000 (25.40)	2.500 (63.50)	1/4-20UNC-2B
NL422B04-024 NL422W04-024	.625 (15.88)	1.000 (25.40)	3.000 (76.20)	1/4-20UNC-2B
NL422B04-032 NL422W04-032	.625 (15.88)	1.000 (25.40)	4.000 (101.60)	1/4-20UNC-2B
NL422B04-040 NL422W04-040	.625 (15.88)	1.000 (25.40)	5.000 (127.00)	1/4-20UNC-2B
NL422B04-048 NL422W04-048	.625 (15.88)	1.000 (25.40)	6.000 (152.40)	1/4-20UNC-2B
NL422B06-008 NL422W06-008	.375 (9.53)	1.750 (44.45)	1.000 (25.40)	10-32UNF-2B
NL422B06-010 NL422W06-010	.375 (9.53)	1.750 (44.45)	1.250 (31.75)	10-32UNF-2B
NL422B06-012 NL422W06-012	.375 (9.53)	1.750 (44.45)	1.500 (38.10)	10-32UNF-2B
NL422B06-016 NL422W06-016	.375 (9.53)	1.750 (44.45)	2.000 (50.80)	10-32UNF-2B
NL422B06-020 NL422W06-020	.375 (9.53)	1.750 (44.45)	2.500 (63.50)	10-32UNF-2B

See footnote 1/ on page 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation (continued).

Type designation	Dimensions 1/			
	C	D	L	T
NL422B06-024 NL422W06-024	.375 (9.53)	1.750 (44.45)	3.000 (76.20)	10-32UNF-2B
NL422B06-032 NL422W06-032	.375 (9.53)	1.750 (44.45)	4.000 (101.60)	10-32UNF-2B
NL422B06-040 NL422W06-040	.375 (9.53)	1.750 (44.45)	5.000 (127.00)	10-32UNF-2B

See footnote 1/ on page 2.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0150)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:05Z
Check the source to verify that this is the current version before use.