MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLES 10, 11, 12, 13, AND 14)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

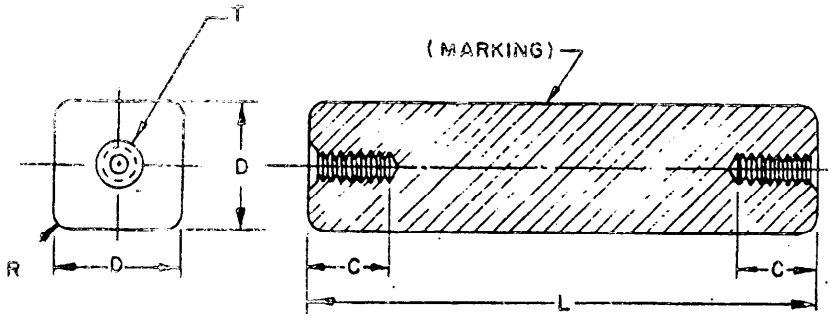


FIGURE 1a. Styles 10, 11, 12, 13.

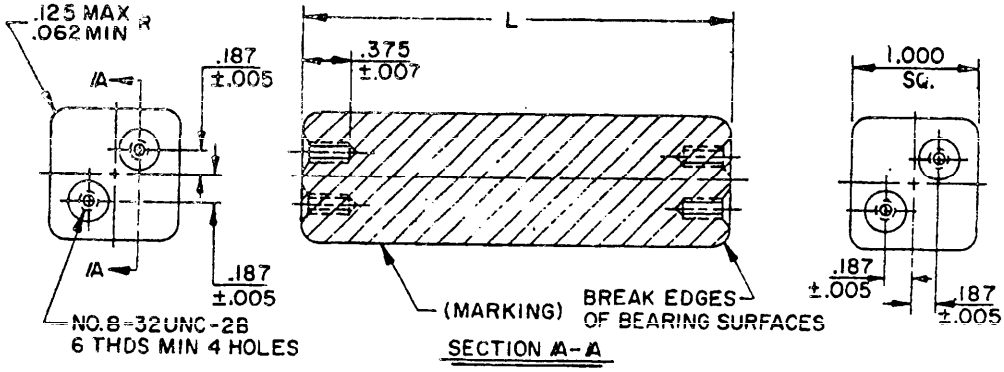


FIGURE 1b. Style 14.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. All edges perpendicular to bearing surfaces shall have the following nominal radii:

Dimension D	Radius R	
	Max	Min
.375	.031	—
.500	.062	—
.750	.125	.062
1.000	.125	.062

INCHES	MM
.005	.13
.007	.18
.031	.79
.062	1.57
.125	3.18
.187	4.75
.375	9.53
.500	12.70
.750	19.05
1.000	25.40

FIGURE 1. Styles 10, 11, 12, 13, and 14 standoff insulators.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:05Z
Check the source to verify that this is the currentversion before use.

TABLE I. Type designation.

Type designation	Dimensions 1/			
	C	D	L	T
NL422B10-004 NL422W10-004	.156 (3.96)	.375 (9.53)	.500 (12.70)	6-32UNC-2B
NL422B10-005 NL422W10-005	.188 (4.78)	.375 (9.53)	.625 (15.88)	6-32UNC-2B
NL422B10-006 NL422W10-006	.250 (6.35)	.375 (9.53)	.750 (19.05)	6-32UNC-2B
NL422B10-008 NL422W10-008	.375 (9.53)	.375 (9.53)	1.000 (25.40)	6-32UNC-2B
NL422B10-010 NL422W10-010	.375 (9.53)	.375 (9.53)	1.250 (31.75)	6-32UNC-2B
NL422B10-012 NL422W10-012	.375 (9.53)	.375 (9.53)	1.500 (38.10)	6-32UNC-2B
NL422B10-016 NL422W10-016	.375 (9.53)	.375 (9.53)	2.000 (50.80)	6-32UNC-2B
NL422B11-006 NL422W11-006	.250 (6.35)	.500 (12.70)	.750 (19.05)	8-32UNC-2B
NL422B11-008 NL422W11-008	.375 (9.53)	.500 (12.70)	1.000 (25.40)	8-32UNC-2B
NL422B11-010 NL422W11-010	.375 (9.53)	.500 (12.70)	1.250 (31.75)	8-32UNC-2B
NL422B11-012 NL422W11-012	.375 (9.53)	.500 (12.70)	1.500 (38.10)	8-32UNC-2B
NL422B11-016 NL422W11-016	.375 (9.53)	.500 (12.70)	2.000 (50.80)	8-32UNC-2B
NL422B11-020 NL422W11-020	.375 (9.53)	.500 (12.70)	2.500 (63.50)	8-32UNC-2B
NL422B12-008 NL422W12-008	.375 (9.53)	.750 (19.05)	1.000 (25.40)	10-32UNF-2B
NL422B12-010 NL422W12-010	.375 (9.53)	.750 (19.05)	1.250 (31.75)	10-32UNF-2B
NL422B12-012 NL422W12-012	.375 (9.53)	.750 (19.05)	1.500 (38.10)	10-32UNF-2B
NL422B12-016 NL422W12-016	.375 (9.53)	.750 (19.05)	2.000 (50.80)	10-32UNF-2B

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:05Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation (continued).

Type designation	Dimensions 1/			
	C	D	L	T
NL422B12-020 NL422W12-020	.375 (9.53)	.750 (19.05)	2.500 (63.50)	10-32UNF-2B
NL422B12-024 NL422W12-024	.375 (9.53)	.750 (19.05)	3.000 (76.20)	10-32UNF-2B
NL422B12-032 NL422W12-032	.375 (9.53)	.750 (19.05)	4.000 (101.60)	10-32UNF-2B
NL422B13-012 NL422W13-012	.500 (12.70)	1.000 (25.40)	1.500 (38.10)	1/4-20UNC-2B
NL422B13-016 NL422W13-016	.625 (15.88)	1.000 (25.40)	2.000 (50.80)	1/4-20UNC-2B
NL422B13-020 NL422W13-020	.625 (15.88)	1.000 (25.40)	2.500 (63.50)	1/4-20UNC-2B
NL422B13-024 NL422W13-024	.625 (15.88)	1.000 (25.40)	3.000 (76.20)	1/4-20UNC-2B
NL422B13-032 NL422W13-032	.625 (15.88)	1.000 (25.40)	4.000 (101.60)	1/4-20UNC-2B
NL422B14-008 NL422W14-008	See figure 1b		1.000 (25.40)	See figure 1b
NL422B14-010 NL422W14-010			1.250 (31.75)	
NL422B14-012 NL422W14-012			1.500 (38.10)	
NL422B14-016 NL422W14-016			2.000 (50.80)	
NL422B14-020 NL422W14-020			2.500 (63.50)	
NL422B14-024 NL422W14-024			3.000 (76.20)	
NL422B14-032 NL422W14-032			4.000 (101.60)	
NL422B14-040 NL422W14-040			5.000 (127.00)	
NL422B14-048 NL422W14-048			6.000 (152.40)	

See footnote 1, page 2.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0151)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:05Z
Check the source to verify that this is the current version before use.