MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLE 26)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

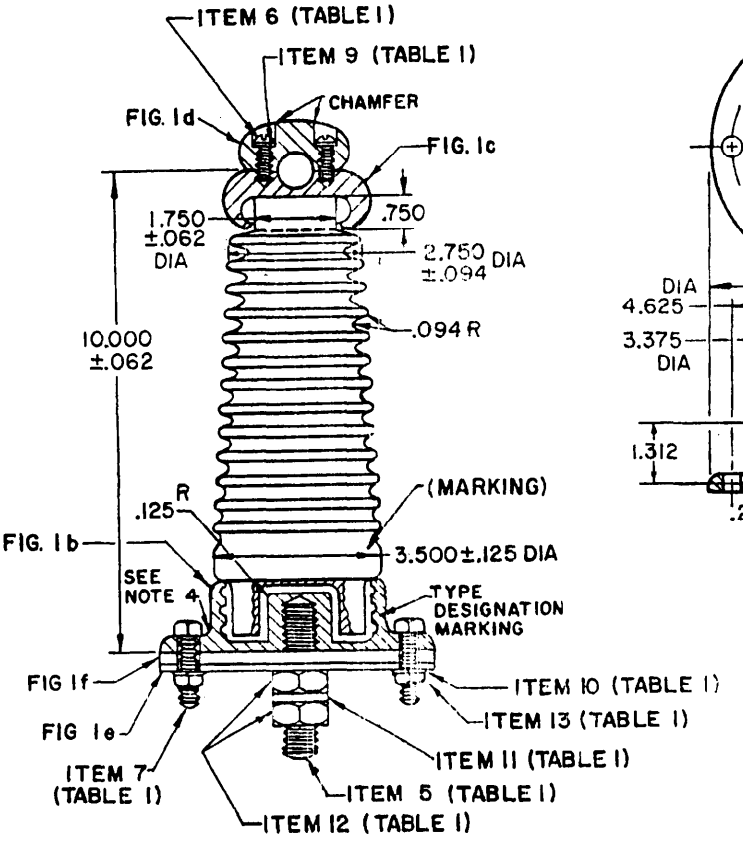


FIGURE 1a. Standoff insulator assembly.

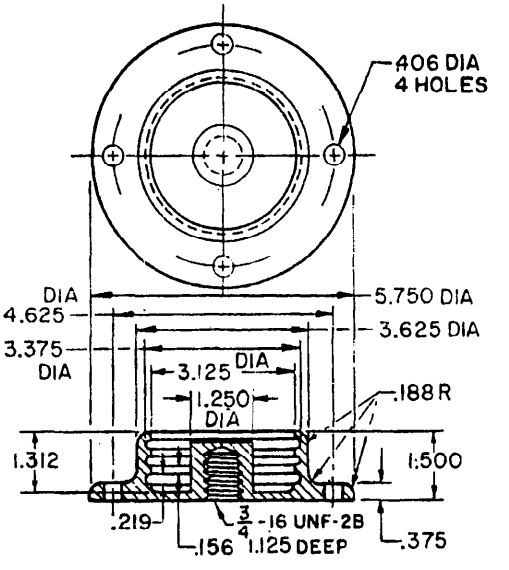


FIGURE 1b. Base.
(Item 1, Table I)

INCHES	MM	INCHES	MM
.062	1.57	1.312	33.32
.094	2.39	1.500	38.10
.125	3.18	1.750	44.45
.156	3.96	2.750	69.85
.188	4.78	3.125	79.38
.219	5.56	3.375	85.73
.375	9.53	3.500	88.90
.406	10.31	3.625	92.08
.750	19.05	4.625	117.48
1.125	28.58	5.750	146.05
1.250	31.75	10.000	254.00

FIGURE 1. Style 26, standoff insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:06Z
Check the source to verify that this is the currentversion before use.

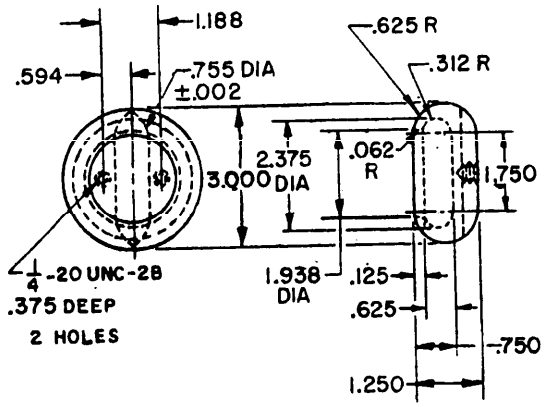


FIGURE 1c. Lower cap.
(Item 3, Table I)

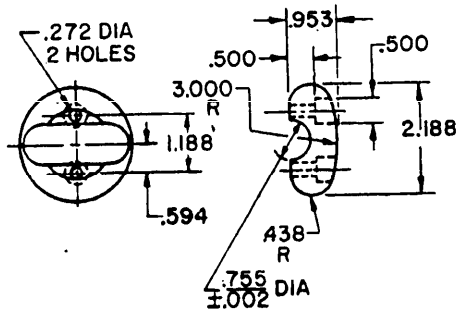


FIGURE 1d. Upper cap.
(Item 4, Table I)

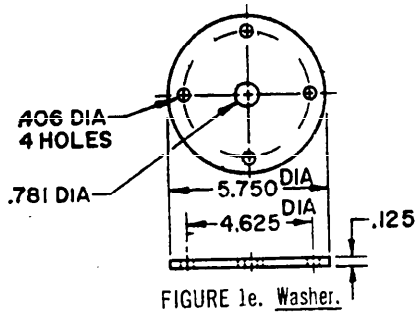


FIGURE 1e. Washer.
(Item 2, Table I)

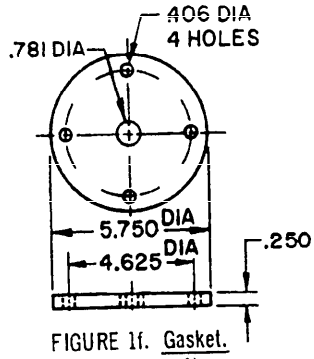


FIGURE 1f. Gasket.
(Item 8, Table I)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.312	7.92	.594	15.09	.953	24.21	2.188	55.58
.062	1.57	.375	9.53	.625	15.88	1.188	30.18	2.375	60.33
.125	3.18	.406	10.31	.750	19.05	1.250	31.75	3.000	76.20
.250	6.35	.438	11.13	.755	19.18	1.750	44.45	4.625	117.48
.272	6.91	.500	12.70	.781	19.84	1.938	49.23	5.750	146.05

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For bolt-head clearance at mounting holes, the minimum radius of the flat area measured from the center of the hole shall be .406 (10.31 mm).

FIGURE 1. Style 26 standoff insulator. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T16:06Z
Check the source to verify that this is the currentversion before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Base	Brass, composition 1, hard, per QQ-B-637; or brass, class A, per QQ-B-621; or bronze, composition 1, per QQ-L-225.	1
2	Washer		1
3	Lower cap		1
4	Upper cap		1
5	Stud screw, 3/4-16UNF-2A, 3 in. long		1
6	Round-head machine screw, 1/4-20UNC-2A, 3/4 in. long	Brass, composition 1, hard, per QQ-B-637	2
7	Hexagon-head bolt, 3/8-16UNC-2A, 1-1/2 in. long		4
8	Gasket	Rubber, type I, class 1, per MIL-G-1149	1
9	Lockwasher per MS35338-101		2
10	Lockwasher per MS35338-103		4
11	Lockwasher per MS35338-108		1
12	Hexagon nut, 3/4-16UNF-2B		2
13	Hexagon nut, 3/8-16UNC-2B		4
14	Insulator	Ceramic, grade 222 or better, per MIL-I-10	1

TABLE II. Type designation.

Type designation	Dimensions
NL222B26-080 NL222W26-080	See figure 1

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ± .020 inch.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 222 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T16:06Z
Check the source to verify that this is the currentversion before use.

Cantilever: An ultimate cantilever load of 360 pounds, minimum, and 800 pounds, minimum average, shall be applied at right angles to the center axis of the insulator by means of a 3/8-inch or 3/4-inch bus, as applicable, inserted into the bus slot. The insulator shall be mounted by its base-retaining screws.

Tensile: The ultimate tensile load shall be 3,000 pounds, minimum average.

Compression: The ultimate compressive load shall be 25,000 pounds, minimum average.

Dielectric withstanding voltage: Apply test voltage of 90 kilovolts, minimum, between a 3/8-inch or 3/4-inch diameter copper tube, as applicable, inserted into the bus slot of the insulator and the insulator base, which shall be grounded.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0154)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:06Z
Check the source to verify that this is the current version before use.