MILITARY SPECIFICATION SHEET

INSULATORS, STANDOFF
(STYLE 27)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

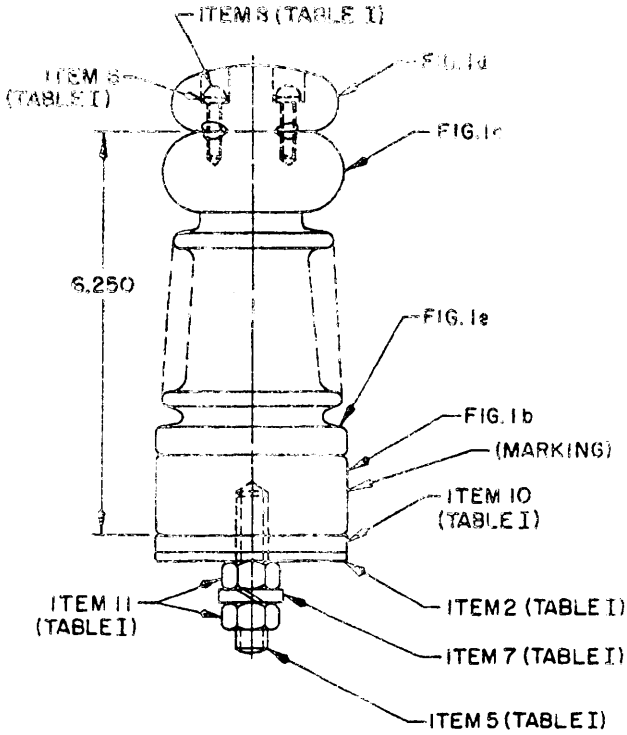


FIGURE 1a. Standoff insulator assembly.

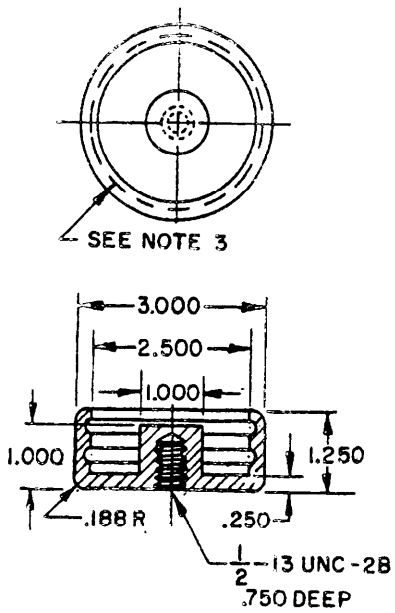


FIGURE 1b. Base.
(Item 1, Table I)

INCHES	MM
.188	4.78
.250	6.35
.750	19.05
1.000	25.40
1.250	31.75
2.500	63.50
3.000	76.20
6.250	158.75

FIGURE 1. Style 27 standoff insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:06Z
Check the source to verify that this is the current version before use.

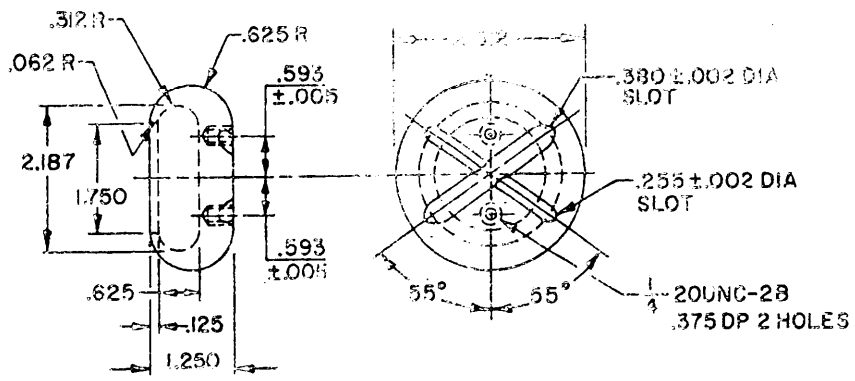


FIGURE 1c. Lower cap.
(Item 3, Table I)


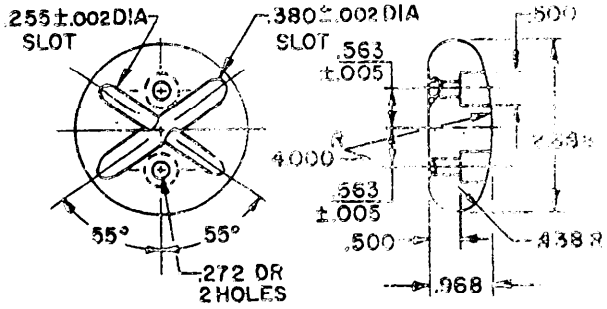


FIGURE 1d. Upper cap.
(Item 4, Table I)

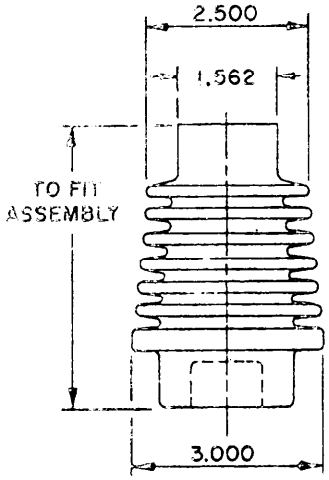

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.380	9.65	1.562	39.67
.005	.13	.438	11.13	1.750	44.45
.062	1.57	.500	12.70	2.187	55.55
.125	3.18	.563	14.30	2.500	63.50
.255	6.48	.593	15.06	2.688	68.28
.272	6.91	.625	15.88	2.812	71.42
.312	7.92	.968	24.59	3.000	76.20
.375	9.53	1.250	31.75	4.000	101.60




FIGURE 1e. Insulator.
(Item 9, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The inside construction is optional to fit the insulator.

FIGURE 1. Style 27 standoff insulator - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:06Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Base	Brass, composition 1, hard, per QQ-B-537; or brass, class A, per QQ-B-621; or bronze, composition 1, per QQ-L-225.	1
2	Washer, 3.000 OD, .531 ID, .125 THK.		1
3	Lower cap		1
4	Upper cap		1
5	Stud screw, 1/2-13UNC-2A, 2-1/2 in. long		1
6	Lockwasher per MS35338-101		2
7	Lockwasher per MS35338-105		1
8	Round head machine screw, 1/4-20UNC-2A, 7/8 in. long, per MS35214	Brass	2
9	Insulator	Ceramic, grade 222 or better, per MIL-I-10.	1
10	Gasket, 3.000 OD, .531 ID, .250 THK	Rubber per MIL-G-1149, type 1, class 2.	1
11	Hexagon nut per MS35690-811		2

TABLE II. Type designation.

Type designation	Dimensions
NL222B27-050 NL222W27-050	See figure 1

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.
Metal - Unless otherwise specified, the tolerance for metal parts shall be ±.020 inch. Tolerance on angles shall be ±1°.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 222 or better.
Metal parts - Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Cantilever: An ultimate cantilever load of 400 pounds, minimum, shall be applied at right angles to the center axis of the insulator by means of a 3/8-inch or 3/4-inch bus, as applicable, inserted into the bus slot. The insulator shall be mounted by its base-retaining screws.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:06Z
Check the source to verify that this is the current version before use.

Tensile: The ultimate tensile load shall be 1,800 pounds, minimum.

Compression: The ultimate compressive load shall be 12,500 pounds, minimum.

Dielectric withstanding voltage: Apply test voltage of 40 kilovolts, minimum, between a 3/8-inch or 3/4-inch diameter copper tube, as applicable, inserted into the bus slot of the insulator and the insulator base, which shall be grounded.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0155)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:06Z
Check the source to verify that this is the current version before use.